

**Zeitschrift:** IABSE structures = Constructions AIPC = IVBH Bauwerke  
**Band:** 14 (1990)  
**Heft:** C-52: Football stadiums in Italy  
  
**Artikel:** Florence municipal stadium (Italy)  
**Autor:** Bartelletti, R.  
**DOI:** <https://doi.org/10.5169/seals-22200>

### **Nutzungsbedingungen**

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

### **Conditions d'utilisation**

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

### **Terms of use**

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

**Download PDF:** 12.12.2025

**ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>**



### 3. Florence Municipal Stadium (Italy)

**Owner:** Florence Municipality

**Designers:** Italo Gamberini, Loris Macci, Enrico Novelli, Giovanna Slocovich, with Orazio Miroddi – Architects  
Raffaello Bartelletti, Enrico Baroni, Alberto Bove – Structures  
Salvatore Di Pasquale – Structural consulting

**Contractors:** ISA Italstrade Appalti S.p.A. – Milano  
Magri Geom. Anselmo S.p.A. – Parma  
Industrie Face Standard S.p.A. – Milano  
Policarbo S.p.A. – Milano

**Works duration:** 30 months

**Service date:** 1990

The Florence Stadium was built in 1932 by Pier Luigi Nervi: its original and daring reinforced concrete facing structures made it one of the world-renowned modern masterpieces, protected as a national monument. Therefore, no significant change of the original complex has been made to increase its capacity, to comply with recent regulations and laws in force, and to give it the modern equipment necessary for the 1990 world football championship. Moreover, some spurious additions were removed in order to display the original structures in their pristine configuration. Among the diverse works, only the most significant ones, from a structural standpoint, will be outlined in this short paper.

With the aim to increase the covered seats, two cantilever steel covers were built; these are near the existing reinforced concrete one, but slightly apart, so that its

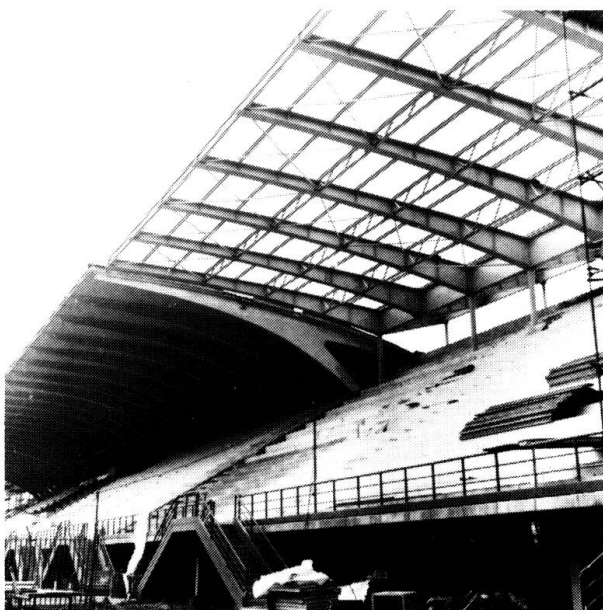


Fig. 1: New cantilever steel cover

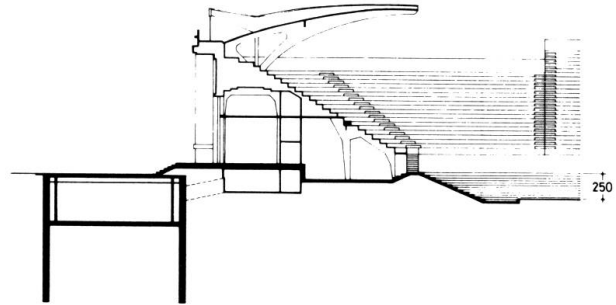


Fig. 2: Section where the lowered field may be seen

perfect visibility is allowed (fig. 1). The new steel cantilevers are made by variable height I profiles and the intrados profile and the span (about 18 m) match those of the Nervi cantilever. The design characteristics of the cantilevers have been subjected to a couple of main conditions: firstly, very slender vertical tie-rods were requested on the back, so that their visual impact on the original main facade could be minimized. Furthermore, since the columns had to pass through the old stands, the demolition had to be limited within a single step, between two adjacent risers. The minimum size of such openings (about 40 cm) dictated the choice of the column section and had also to comply with the maximum values of the computed displacements, due to live loads (earthquake included). The tie-rods are fastened at ground level by reinforced concrete diaphragm walls, 14 m deep. The upper end of each tie-rod has been threaded so that a couple of adjustable rings can block the cylindrical casing of the cantilever back-end. Such a device allowed, during assembly, to easily adjust the pitch of each cantilever beam, until they were lined up with each other and with the reinforced concrete ones.

With the aim of making place for new tiers around the field, this was lowered (2.50 m) by a 40 000 m<sup>3</sup> excavation (fig. 2). Its feasibility had been previously ascertained by hydro-geological surveys and analyses dealing with the water-table depth and the stability of existing foundations. The new reinforced concrete stands cover roomy spaces for deposits and technical systems; there is no expansion joint between them, since they were mostly cast upon the ground. However, a sequence of castings and a series of provisional joints were provided, so that shrinkage effects could be minimized. New spaces for parking, gymnasium, swimming pool, electric and plumbing systems are in most cases underground, totalling about 60 000 m<sup>3</sup> (fig. 3). The retaining walls have been built as reinforced concrete diaphragm walls, dug into the ground by use of guided-bucket shovels and bentonite slurry. The diaphragm walls – 14 m deep and 0.8 m thick – were necessary because the new structures are close or even adjacent to the existing foundations. This technique also allowed to limit the drainage during excavation, even when the bottom level was slightly lower than the water-table, which is about 7.70 m deep. Because some underground building has sizable dimensions (the local authority parking, for instance, is 145 m long), some diaphragm walls have been

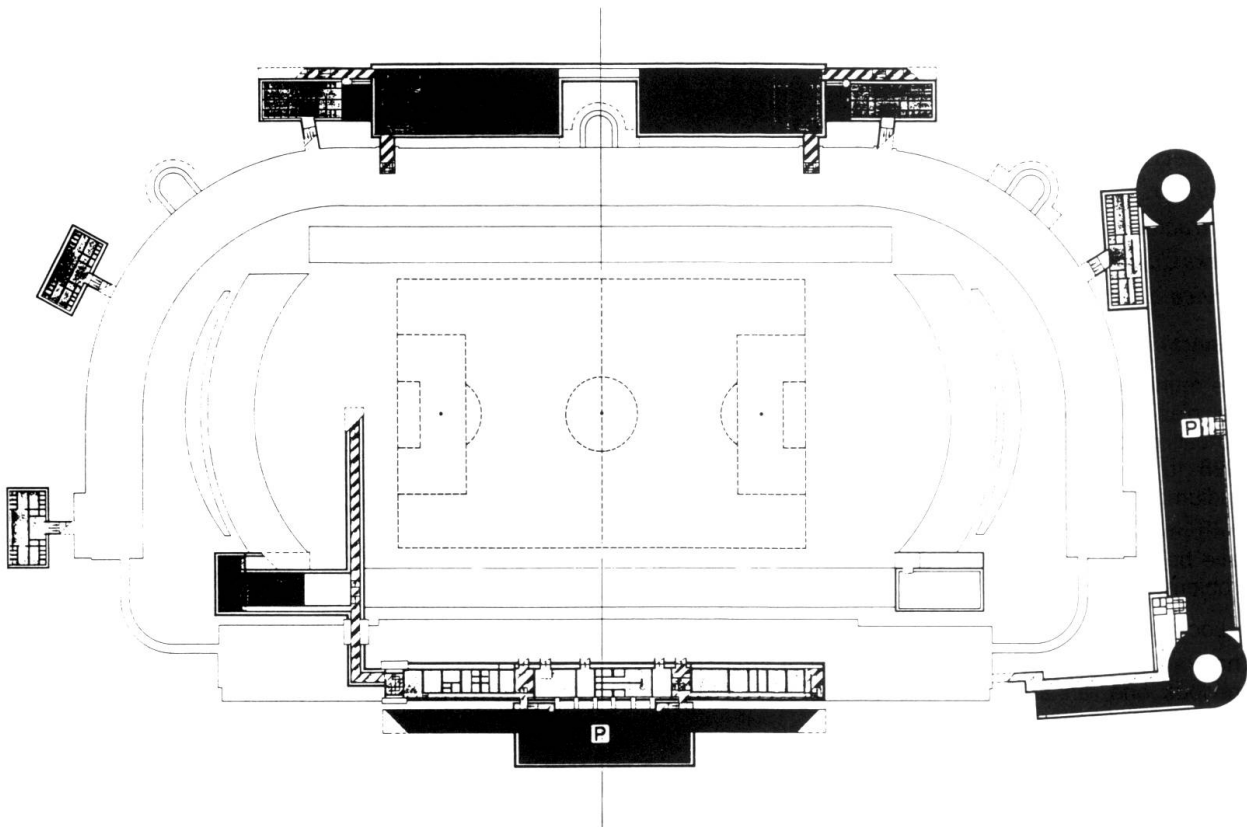


Fig. 3: Plan view of the underground constructions

shortened at the lower end, so that largescale changes in groundwater flow could be avoided. The bottom slabs, which are the lower floors of the underground constructions, are linked to the diaphragm walls by reinforcement stumps, previously placed under cover and then bent out, and also by reinforcement bars inserted in drilled holes, filled by non-shrinking grout. The slabs were designed with such characteristics that could counteract uplift pressures due to a possible long-term rise of the water-table. The upper storey is made by prefabricated prestressed reinforced concrete elements, acting also as struts or braces against the top of the diaphragm walls; on such floors the live loads of second class bridges have been taken into account.

The existing stands were heavily damaged and weathered due to the lack of shelters, the inadequate concrete cover, the thinness of the steps. It was therefore necessary to provide a thorough upgrading of materials and a durable protection. In particular, from the upper surfaces of the stands the existing levelling layers were removed, then the structures were restored and, finally, a finish-layer was made, with advanced concrete mixes and diamond-shaped reinforcement mesh. This was placed for static-consolidation purposes too, providing joints at 5 – 6 m intervals. Finally it is worth mentioning the building of 4 steel floodlight towers whose maximum height is 56 m; their foundations could be located (since room is available underground on the outside of the stadium) on the top of a set of 3 reinforced concrete diaphragm



Fig. 4: New steel stairs

walls (dimensions: 3 × 3 × 14 m). A couple of new steel stairs were also constructed, close to the outer side of the stands (fig. 4).

(R. Bartelletti)