

**Zeitschrift:** IABSE proceedings = Mémoires AIPC = IVBH Abhandlungen  
**Band:** 1 (1977)  
**Heft:** P-9: A rational analysis of plates with eccentric stiffeners

**Artikel:** A rational analysis of plates with eccentric stiffeners  
**Autor:** Hovichitr, Intarachai / Nishino, Fumio / Karasudhi, Pisdh  
**DOI:** <https://doi.org/10.5169/seals-32461>

#### **Nutzungsbedingungen**

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

#### **Conditions d'utilisation**

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

#### **Terms of use**

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

**Download PDF:** 28.01.2026

**ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>**

## A Rational Analysis of Plates with Eccentric Stiffeners

Analyse rationnelle de plaques avec des raidisseurs excentrés

Berechnung von Platten mit exzentrischen Steifen

**Intarachai HOVICHITR**

Research Associate  
Asian Institute of Technology  
Bangkok, Thailand

**Pisidhi KARASUDHI**

Associate Professor  
Division of Structural Engineering  
Asian Institute of Technology  
Bangkok, Thailand

**Fumio NISHINO**

Associate Professor  
Department of Civil Engineering  
University of Tokyo  
Tokyo, Japan

**Seng-Lip LEE**

Professor and Head  
Department of Civil Engineering  
University of Singapore  
Singapore

### **SUMMARY**

A rational analysis of a rectangular plate with eccentric stiffeners is carried out by a variational principle, leading to a governing differential equation of order ten and a set of natural boundary conditions. Neglecting the lateral bending and the bimoments of the ribs yields an approximate theory with an eighth order differential equation. To make this study more practical, a fourth order governing equation is derived. The results by these two approximate theories for two simple cases, are compared with the results by the original ten order theory.

### **RÉSUMÉ**

L'analyse rationnelle d'une plaque rectangulaire avec des raidisseurs excentrés est effectuée au moyen du calcul des variations, conduisant à une équation différentielle du 10<sup>e</sup> ordre et à un certain nombre de conditions aux limites naturelles.

Le fait de négliger la flexion latérale et les bimoments des nervures permet de développer une théorie approchée avec une équation différentielle du 8<sup>e</sup> ordre. Une équation différentielle du 4<sup>e</sup> ordre est établie afin de rendre cette étude plus pratique. Les applications de ces deux théories approchées dans deux cas simples sont comparées aux résultats de la théorie générale du 10<sup>e</sup> ordre.

### **ZUSAMMENFASSUNG**

Anhand eines Variationsprinzipes wird zur Berechnung einer Rechteckplatte mit exzentrischen Steifen eine Differentialgleichung 2. Ordnung mit entsprechenden natürlichen Randbedingungen gewonnen. Durch Vernachlässigung der Querbiegung und der Wölbmomente der Rippen kommt man zu einer Näherungstheorie mit einer Differentialgleichung 8. Ordnung. Um die praktische Anwendung zu vereinfachen, wird eine Differentialgleichung 4. Ordnung abgeleitet. Die Ergebnisse dieser Zwei Näherungsmethoden für zwei einfache Fälle werden mit denjenigen der ursprünglichen 10. Ordnung verglichen.



## 1. INTRODUCTION

The analysis of an eccentrically stiffened plate by an orthotropic plate theory was first developed by HUBER [1]. In his approach, the top slab and the stiffeners are "smeared" into an orthotropic plate of equivalent bending and torsional rigidities. The bending rigidity was later reevaluated by BARES and MASSONNET [2] taking into account of the full interaction between the slab and the stiffening grid system. An analysis in which the effect of Poisson's ratio was considered for the slab and for the actual contact area between the intersecting ribs was developed by CUSENS, ZEIDAN and PAMA [3]. NISHINO, PAMA and LEE [4] considered the interaction between the slab and the grid system in the determination of these rigidities. Various attempts also made to develop a more exact theory for this problem lead to governing differential equations with higher orders than Huber's equation, e.g., PFLÜGER [5], MASSONNET [6], and CLIFTON, CHANG and AU [7]. However, the torsional rigidity proposed by all these investigators does not agree well with the experimental results.

The principal objective of this study is to establish a rigorous and feasible approach to the problem of the design of plates with eccentric stiffeners. By means of a variational principle, natural boundary conditions and three coupled differential equations are obtained involving one parameter, whose value is assumed in such a way that the anticlastic solution by this theory agrees closely with the experimental results. These governing differential equations are reduced in order from ten to eight by neglecting the lateral bending and the bimoments in the ribs. Furthermore, a single governing equation of Huber's type is obtained. The solutions by these two approximate theories are compared with the original tenth order theory, for the cases of a plate under a cylindrical bending and a simply supported plate subjected to a uniform load.

## 2. PROBLEM FORMULATION BY VARIATIONAL PRINCIPLE

### 2.1 Sign Convention and Basic Assumptions

Significant dimensions of a typical element of a plate with eccentric stiffeners are shown in Fig. 1. The positive directions of the corresponding displacement components are also indicated. For stresses, the sign convention as adopted by TIMOSHENKO and GOODIER [8] is used. The pertinent assumptions in this regard are as follows: all displacements are small; the slab and ribs are made of thin plates; points initially lying on the normal to the middle surface remain on the

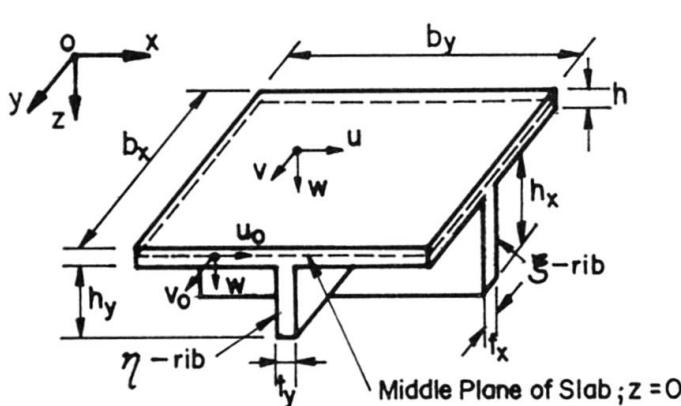


Fig. 1 Typical Element of Plate with Eccentric Stiffeners

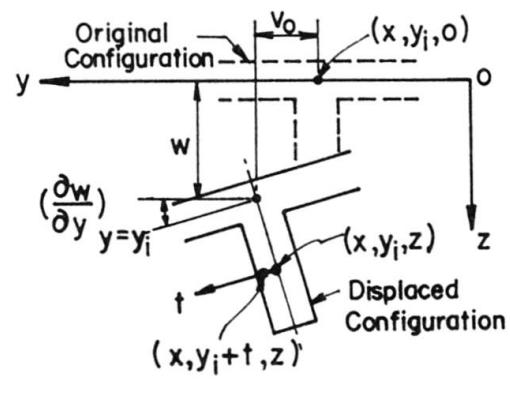


Fig. 2 Original and Displaced Configurations of  $\xi$ -Rib, at  $y = y_i$

normal after deformation; cross sections of the ribs do not distort; shear strains along the middle plane and also across the thickness of the thin ribs are small and can be neglected.

## 2.2 Strain-Displacement Relations

According to the above assumptions, displacements and strains can be written as follows; for the top slab,

$$w(x, y, z) = w(x, y) \quad (1a)$$

$$u(x, y, z) = u_o(x, y) - z \frac{\partial w}{\partial x}(x, y), \quad v(x, y, z) = v_o(x, y) - z \frac{\partial w}{\partial y}(x, y) \quad (1b, c)$$

and

$$\varepsilon_x = \frac{\partial u_o}{\partial x} - z \frac{\partial^2 w}{\partial x^2}, \quad \varepsilon_y = \frac{\partial v_o}{\partial y} - z \frac{\partial^2 w}{\partial y^2}, \quad \gamma_{xy} = \gamma_{yx} = \frac{\partial u_o}{\partial y} + \frac{\partial v_o}{\partial x} - 2z \frac{\partial^2 w}{\partial x \partial y} \quad (2a-c)$$

$$\varepsilon_z = 0, \quad \gamma_{yz} = \gamma_{zy} = 0, \quad \gamma_{zx} = \gamma_{xz} = 0 \quad (2d-f)$$

for a  $\xi$ -rib, spanning in x-direction, at  $y = y_i$ ,

$$w(x, y_i + t, z) = w(x, y_i) + t \left( \frac{\partial w}{\partial y} \right)_{y=y_i}, \quad v(x, y_i + t, z) = v_o(x, y_i) - z \left( \frac{\partial w}{\partial y} \right)_{y=y_i} \quad (3a, b)$$

$$u(x, y_i + t, z) = u_o(x, y_i) - z \left( \frac{\partial w}{\partial x} \right)_{y=y_i} + \left[ z \left( \frac{\partial^2 w}{\partial x \partial y} \right)_{y=y_i} - \frac{\partial v_o}{\partial x}(x, y_i) \right] t \quad (3c)$$

and

$$\varepsilon_x = \frac{\partial u_o}{\partial x}(x, y_i) - z \left( \frac{\partial^2 w}{\partial x^2} \right)_{y=y_i} + \left[ z \left( \frac{\partial^2 w}{\partial x^2 \partial y} \right)_{y=y_i} - \frac{\partial^2 v_o}{\partial x^2}(x, y_i) \right] t \quad (4a)$$

$$\gamma_{xz} = \gamma_{zx} = 2t \left( \frac{\partial^2 w}{\partial x \partial y} \right)_{y=y_i}, \quad \varepsilon_t = 0, \quad \varepsilon_z = 0, \quad \gamma_{xt} = \gamma_{tx} = 0, \quad \gamma_{tz} = \gamma_{zt} = 0 \quad (4b-f)$$

in which  $t$  is an arbitrary coordinate axis normal to the middle plane of the  $\xi$ -rib as shown in Fig. 2. Similarly for an  $\eta$ -rib, spanning in y-direction, at  $x = x_j$ ,

$$w(x_j + t', y, z) = w(x_j, y) + t' \left( \frac{\partial w}{\partial x} \right)_{x=x_j}, \quad u(x_j + t', y, z) = u_o(x_j, y) - z \left( \frac{\partial w}{\partial x} \right)_{x=x_j} \quad (5a, b)$$

$$v(x_j + t', y, z) = v_o(x_j, y) - z \left( \frac{\partial w}{\partial y} \right)_{x=x_j} + \left[ z \left( \frac{\partial^2 w}{\partial x \partial y} \right)_{x=x_j} - \frac{\partial u_o}{\partial y}(x_j, y) \right] t' \quad (5c)$$

and

$$\varepsilon_y = \frac{\partial v_o}{\partial y}(x_j, y) - z \left( \frac{\partial^2 w}{\partial y^2} \right)_{x=x_j} + \left[ z \left( \frac{\partial^2 w}{\partial x \partial y^2} \right)_{x=x_j} - \frac{\partial^2 u_o}{\partial y^2}(x_j, y) \right] t' \quad (6a)$$

$$\gamma_{yz} = \gamma_{zy} = 2t' \left( \frac{\partial^2 w}{\partial x \partial y} \right)_{x=x_j}, \quad \varepsilon_{t'} = 0, \quad \varepsilon_z = 0, \quad \gamma_{yt'} = \gamma_{t'y} = 0, \quad \gamma_{zt'} = \gamma_{t'z} = 0 \quad (6b-f)$$

where  $t'$  is an arbitrary coordinate axis normal to the middle plane of the  $\eta$ -rib. At the intersection of the  $\xi$ -rib at  $y = y_i$  and the  $\eta$ -rib at  $x = x_j$ , the strain-displacement relations are assumed to take the same forms as those for the ribs, excepting that  $\gamma_{xy}$  and  $\gamma_{yx}$  are assumed in the form similar to that of the slab, i.e.,

$$\gamma_{xy} = \gamma_{yx} = \left( \frac{\partial u_o}{\partial y} + \frac{\partial v_o}{\partial x} - 2 \bar{h} \frac{\partial^2 w}{\partial x \partial y} \right)_{x=x_j, y=y_i} \quad (7)$$



where  $x_j - t_y/2 \leq x \leq x_j + t_y/2$ ,  $y_i - t_x/2 \leq y \leq y_i + t_x/2$  and  $h/2 \leq z \leq h/2 + h_y$ , assuming that  $h_y \leq h_x$ . The term  $h$  will be determined in such a way that the pure torsional rigidity obtained from this formulation agrees reasonably well with the experimental results.

### 2.3 Equilibrium Equations and Boundary Conditions

The virtual work principle can be written as

$$W_i = W_e \quad (8)$$

where  $W_i$  and  $W_e$  are the internal and external virtual work, respectively, and can be expressed in the forms

$$W_i = \int_V \int \int \left[ \sigma_x \delta \varepsilon_x + \sigma_y \delta \varepsilon_y + \sigma_z \delta \varepsilon_z + \tau_{xy} \delta \gamma_{xy} + \tau_{yz} \delta \gamma_{yz} + \tau_{zx} \delta \gamma_{zx} \right] dV \quad (9)$$

$$W_e = \int_A \int q(x, y) \delta w dA + \left[ \int_{b_1}^{b_2} \int_z (\bar{\sigma}_x \delta u + \bar{\tau}_{xy} \delta v + \bar{\tau}_{xz} \delta w) dz dy \right]_{x=a_1}^{x=a_2} + \left[ \int_{a_1}^{a_2} \int_z (\bar{\sigma}_y \delta v + \bar{\tau}_{yx} \delta u + \bar{\tau}_{yz} \delta w) dz dx \right]_{y=b_1}^{y=b_2} \quad (10)$$

where  $q(x, y)$  is the applied transverse load, a bar ( $\bar{\cdot}$ ) denotes a boundary traction,  $x = a_1, a_2$  and  $y = b_1, b_2$  are the four edges of the plate.

Substituting Eqs. (9) and (10) into Eq. (8), in views of Eqs. (1) to (7), and applying Green's formula lead to the equilibrium equations, for an eccentrically stiffened plate with identical and equally spaced ribs in each direction, as follows

$$\frac{\partial N_x}{\partial x} + \frac{\partial N_{yx}}{\partial y} = 0, \quad \frac{\partial N_{xy}}{\partial x} + \frac{\partial N_y}{\partial y} = 0 \quad (11a, b)$$

$$\frac{\partial^2 M_x}{\partial x^2} + \frac{\partial^2 M_{xy}}{\partial x \partial y} + \frac{\partial^2 M_{yx}}{\partial x \partial y} + \frac{\partial^2 M_y}{\partial y^2} + q(x, y) = 0 \quad (11c)$$

and the natural boundary conditions are, along the edges  $x = a_1$  and  $x = a_2$ ,

$$N_x = \bar{N}_x, \quad \text{or} \quad u_o = \text{constant} \quad (12a)$$

$$N_{xy} = \bar{N}_{xy}, \quad \text{or} \quad v_o = \text{constant} \quad (12b)$$

$$v_x = \bar{Q}_x + \frac{\partial}{\partial y} (\bar{M}_{xy} - \bar{M}_{xz}, \xi), \quad \text{or} \quad w = \text{constant} \quad (12c)$$

$$M_x^* = \bar{M}_x + \frac{\partial \bar{M}_{\omega, \xi}}{\partial y}, \quad \text{or} \quad \frac{\partial w}{\partial x} = \text{constant} \quad (12d)$$

$$M_{z, \xi} = \bar{M}_{z, \xi}, \quad \text{or} \quad \frac{\partial v_o}{\partial x} = \text{constant} \quad (12e)$$

along the edges  $y = b_1$  and  $y = b_2$ ,

$$N_{yx} = \bar{N}_{yx}, \quad \text{or} \quad u_o = \text{constant} \quad (13a)$$

$$N_y = \bar{N}_y, \quad \text{or} \quad v_o = \text{constant} \quad (13b)$$

$$v_y = \bar{Q}_y + \frac{\partial}{\partial x} (\bar{M}_{yx} - \bar{M}_{yz, \eta}), \quad \text{or} \quad w = \text{constant} \quad (13c)$$

$$M_y^* = \bar{M}_y + \frac{\partial \bar{M}_{\omega, \eta}}{\partial x}, \quad \text{or} \quad \frac{\partial w}{\partial y} = \text{constant} \quad (13d)$$

$$M_{z, \eta} = \bar{M}_{z, \eta}, \quad \text{or} \quad \frac{\partial u_o}{\partial y} = \text{constant} \quad (13e)$$

and, at the corners,

$$R = \bar{M}_{xy} + \bar{M}_{yx} - \bar{M}_{xz, \xi} - \bar{M}_{yz, \eta}, \quad \text{or} \quad w = \text{constant} \quad (14a)$$

$$\hat{M}_x = \bar{M}_{\omega, \xi}, \quad \text{or} \quad \frac{\partial w}{\partial x} = \text{constant} \quad (14b)$$

$$\hat{M}_y = \bar{M}_{\omega, \eta}, \quad \text{or} \quad \frac{\partial w}{\partial y} = \text{constant} \quad (14c)$$

where

$$N_x = N_{x,p} + N_{x, \xi}, \quad N_{xy} = N_{xy,p} + N_{xy,I} + \frac{\partial M_{z, \xi}}{\partial x} \quad (15a, b)$$

$$M_x = M_{x,p} + M_{x, \xi}, \quad M_{xy} = M_{xy,p} + M_{xy,I} - 2M_{xz, \xi} + \frac{\partial M_{\omega, \xi}}{\partial x} \quad (15c, d)$$

$$Q_x = \frac{\partial M_x}{\partial x} + \frac{\partial M_{yx}}{\partial y}, \quad v_x = Q_x + \frac{\partial M_{xy}}{\partial y}, \quad R = -M_{xy} - M_{yx} \quad (15e-g)$$

$$M_x^* = M_x + \frac{\partial M_{\omega, \xi}}{\partial y}, \quad \hat{M}_x = M_{\omega, \xi} \quad (15h, i)$$

and

$$N_{x,p} = \int_{-\frac{h}{2}}^{\frac{h}{2}} \sigma_x dz, \quad N_{x, \xi} = \frac{1}{b_x} \int_{A_x} \sigma_x dA, \quad N_{xy,p} = \int_{-\frac{h}{2}}^{\frac{h}{2}} \tau_{xy} dz \quad (16a-c)$$

$$N_{xy,I} = \frac{1}{b_x b_y} \int_{V_{ij}} \tau_{xy} dV, \quad M_{x,p} = \int_{-\frac{h}{2}}^{\frac{h}{2}} \sigma_x z dz, \quad M_{x, \xi} = \frac{1}{b_x} \int_{A_x} \sigma_x z dA \quad (16d-f)$$

$$M_{xy,p} = \int_{-\frac{h}{2}}^{\frac{h}{2}} \tau_{xy} z dz, \quad M_{xy,I} = \frac{1}{b_x b_y} \int_{V_{ij}} \tau_{xy} \bar{h} dV, \quad M_{xz, \xi} = \frac{1}{b_x} \int_{A_x} \tau_{xz} t dA \quad (16g-i)$$

$$M_{z, \xi} = \frac{1}{b_x} \int_{A_x} \sigma_x t dA, \quad M_{\omega, \xi} = \frac{1}{b_x} \int_{A_x} \sigma_x z t dA \quad (16j, k)$$

In Eqs. (15) and (16) are stress resultants in x-direction. Those in y-direction can be written in similar forms. It is of interest to note the presence of  $M_{\omega, \xi}$  and  $M_{\omega, \eta}$ , which are bimoment stress resultants. This induces the supplemented moment stress resultants  $M_x^*$  and  $M_y^*$ , and the corner moments  $\hat{M}_x$  and  $\hat{M}_y$ ; which are analogous to the induction of the supplemented shear stress resultants and the corner forces by  $M_{xy}$  and  $M_{yx}$ .

## 2.4 Stress-Strain Relations

The stress-strain relations are, for the slab,

$$\sigma_x = \frac{E}{1-\nu^2} (\epsilon_x + \nu \epsilon_y), \quad \sigma_y = \frac{E}{1-\nu^2} (\epsilon_y + \nu \epsilon_x), \quad \tau_{xy} = \frac{E}{2(1+\nu)} \gamma_{xy} \quad (17a-c)$$

where  $\nu$  and  $E$  are the Poisson's ratio and Young's modulus of the slab; for  $\xi$ -ribs,



$$\sigma_x = E_\xi \epsilon_x, \quad \tau_{xz} = G_\xi \gamma_{xz} \quad (18a,b)$$

and, for  $\eta$ -ribs,

$$\sigma_y = E_\eta \epsilon_y, \quad \tau_{yz} = G_\eta \gamma_{yz} \quad (19a,b)$$

where  $E_\xi$  and  $G_\xi$  are the Young's modulus and the modulus of rigidity of  $\xi$ -ribs, while  $E_\eta$  and  $G_\eta$  are those of  $\eta$ -ribs, respectively. In addition, the stress-strain relations for rib intersections are

$$\sigma_x = E_\xi \epsilon_x, \quad \sigma_y = E_\eta \epsilon_y, \quad \tau_{xy} = G_I \gamma_{xy} \quad (20a-c)$$

in which  $G_I$  is the shear modulus of the intersections.

## 2.5 Stress Resultant - Displacement Relations

Substituting the stress-strain relations above into Eqs. (15), in view of Eqs. (16), leads to the stress resultants in  $x$ -direction as the followings.

$$N_x = (B + B_x) \frac{\partial u_o}{\partial x} + vB \frac{\partial v_o}{\partial y} - C_x \frac{\partial^2 w}{\partial x^2} \quad (21a)$$

$$N_{xy} = \left[ \frac{(1-v)}{2} B + B' \right] \left( \frac{\partial u_o}{\partial y} + \frac{\partial v_o}{\partial x} \right) - 2C' \frac{\partial^2 w}{\partial x \partial y} - B_x^* \frac{\partial^3 v_o}{\partial x^3} + C_x^* \frac{\partial^4 w}{\partial x^3 \partial y} \quad (21b)$$

$$M_x = -(D + D_x) \frac{\partial^2 w}{\partial x^2} - vD \frac{\partial^2 w}{\partial y^2} + C_x \frac{\partial u_o}{\partial x} \quad (21c)$$

$$M_{xy} = -[(1-v)D + H_x + 2D'] \frac{\partial^2 w}{\partial x \partial y} + C' \left( \frac{\partial u_o}{\partial y} + \frac{\partial v_o}{\partial x} \right) - C_x^* \frac{\partial^3 v_o}{\partial x^3} + D_x^* \frac{\partial^4 w}{\partial x^3 \partial y} \quad (21d)$$

$$Q_x = - (D + D_x) \frac{\partial^3 w}{\partial x^3} - (D + H_y + 2D') \frac{\partial^3 w}{\partial x \partial y^2} + C_x \frac{\partial^2 u_o}{\partial x^2} + C' \left( \frac{\partial^2 u_o}{\partial y^2} + \frac{\partial^2 v_o}{\partial x \partial y} \right) - C_y^* \frac{\partial^4 u_o}{\partial y^4} + D_y^* \frac{\partial^5 w}{\partial x \partial y^4} \quad (21e)$$

$$M_{z,\xi} = C_x^* \frac{\partial^3 w}{\partial x^2 \partial y} - B_x^* \frac{\partial^2 v_o}{\partial x^2}, \quad M_{w,\xi} = D_x^* \frac{\partial^3 w}{\partial x^2 \partial y} - C_x^* \frac{\partial^2 v_o}{\partial x^2} \quad (21f,g)$$

in which

$$B = Eh/(1-v^2), \quad D = Eh^3/12(1-v^2), \quad B_x = E_\xi A_\xi \quad (22a-c)$$

$$C_x = E_\xi S_{y,\xi}, \quad D_x = E_\xi I_{y,\xi}, \quad H_x = t_x^2 A_\xi G_\xi / 3 \quad (22d-f)$$

$$B_x^* = t_x^2 B_x / 12, \quad C_x^* = t_x^2 C_x / 12, \quad D_x^* = t_x^2 D_x / 12 \quad (22g-i)$$

$$B' = \frac{t_x t_y}{b_x b_y} h_y G_I, \quad C' = B' \bar{h}, \quad D' = C' \bar{h} \quad (22j-l)$$

and

$$A_\xi = \frac{1}{b_x} \int_{A_x} \int dA, \quad S_{y,\xi} = \frac{1}{b_x} \int_{A_x} \int z dA, \quad I_{y,\xi} = \frac{1}{b_x} \int_{A_x} \int z^2 dA \quad (23a-c)$$

The stress resultants in  $y$ -direction, which can be written in similar forms, are omitted in this paper for the sake of brevity.

## 2.6 Governing Differential Equations

Substituting the stress resultant-displacement relations above into the equilibrium equations yields the governing differential equations of the form

$$(B+B_x) \frac{\partial^2 u_o}{\partial x^2} + B_1 \frac{\partial^2 u_o}{\partial y^2} + B_2 \frac{\partial^2 v_o}{\partial x \partial y} - C_x \frac{\partial^3 w}{\partial x^3} - 2C' \frac{\partial^3 w}{\partial x \partial y^2} - B_y^* \frac{\partial^4 u_o}{\partial y^4} + C_y^* \frac{\partial^5 w}{\partial x \partial y^4} = 0 \quad (24a)$$

$$(B+B_y) \frac{\partial^2 v_o}{\partial y^2} + B_1 \frac{\partial^2 v_o}{\partial x^2} + B_2 \frac{\partial^2 u_o}{\partial x \partial y} - C_y \frac{\partial^3 w}{\partial y^3} - 2C' \frac{\partial^3 w}{\partial x^2 \partial y} - B_x^* \frac{\partial^4 v_o}{\partial x^4} + C_x^* \frac{\partial^5 w}{\partial x^4 \partial y} = 0 \quad (24b)$$

$$(D+D_x) \frac{\partial^4 w}{\partial x^4} + (2D+H_x+H_y+4D') \frac{\partial^4 w}{\partial x^2 \partial y^2} + (D+D_y) \frac{\partial^4 w}{\partial y^4} - C_x \frac{\partial^3 u_o}{\partial x^3} - C_y \frac{\partial^3 v_o}{\partial y^3} \\ - 2C' \left( \frac{\partial^3 u_o}{\partial x \partial y^2} + \frac{\partial^3 v_o}{\partial x^2 \partial y} \right) + C_y^* \frac{\partial^5 u_o}{\partial x \partial y^4} + C_x^* \frac{\partial^5 v_o}{\partial x^4 \partial y} - D_x^* \frac{\partial^6 w}{\partial x^4 \partial y^2} - D_y^* \frac{\partial^6 w}{\partial x^2 \partial y^4} = q(x, y) \quad (24c)$$

where  $B_1 = (1-v)B/2+B'$ ,  $B_2 = (1+v)B/2+B'$ . Note that there are ten boundary conditions in each direction, hence the above simultaneous governing equations can be, if required, reduced into a single partial differential equation of order ten with only one independent variable, i.e.,  $u_o$  or  $v_o$  or  $w$ .

## 2.7 Determination of $\bar{h}$

Considering the case of the anticlastic bending shown in Fig. 3; the governing equations, Eqs. (24) for  $q(x, y) = 0$ , the conditions of zero stress resultants along the plate edges, the conditions of zero deflection at the three supported corners, and the condition  $R(a, b) = P$  at the loaded corner are satisfied by taking the displacement functions in the form

$$u_o(x, y) = e \frac{\partial w}{\partial x}, \quad v_o(x, y) = e \frac{\partial w}{\partial y}, \quad w(x, y) = Pxy / (D_{xy} + D_{yx}) \quad (25a-c)$$

in which  $e = C'/B_1$  and

$$D_{xy} = (1-v)D + H_x + 2D' - 2C'e, \quad D_{yx} = (1-v)D + H_y + 2D' - 2C'e \quad (26a, b)$$

In good agreement with the experimental results [9,10] as shown typically in Fig. 4, the value of the pure torsional rigidity,  $D_{xy} + D_{yx}$ , can be obtained with  $\bar{h}$  being proposed as

$$\bar{h} = \sqrt{h(h+h_y)/2} \quad (27)$$

The results by CUSENS et al [3] and NISHINO et al [4] are also presented in Fig. 4 for comparison.

## 3. APPROXIMATE THEORIES

### 3.1 Approximate Theory with Eighth Order Differential Equation

The bimoments and the bending moments about  $z$ -axis of the ribs may be assumed negligible, and this assumption, in view of Eqs. (21f,g), can be carried out by setting  $B_x^*, B_y^*, C_x^*, C_y^*, D_x^*$  and  $D_y^*$  to zero in all equations involved. Alternatively, this approximation can also be attained if the coefficients of  $t$  and  $t'$  in Eqs. (4a) and (6a) are dropped. Accordingly, the number of the natural boundary conditions, Eqs. (12) or (13), is reduced to eight, which indicates that the governing equations for this approximate theory can be represented by a single eighth order partial differential equation in terms of one independent variable.

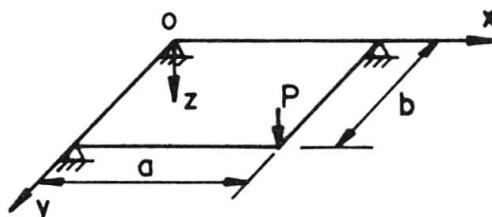


Fig. 3 Anticlastic Loading

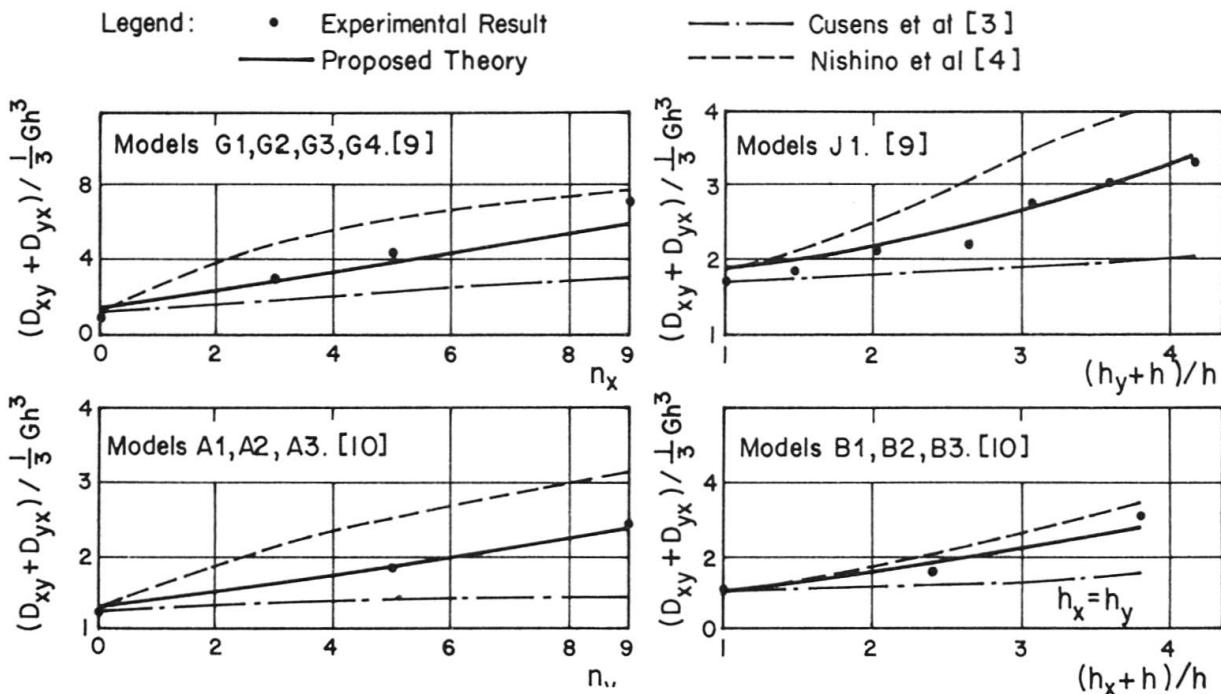


Fig. 4 Comparison of Pure Torsional Rigidities

### 3.2 Approximate Theory with Fourth Order Differential Equation

The fourth order differential equation of Huber's type [1], which is commonly adopted in practice, can be derived as follows: substituting the solution of the anticlastic bending, Eqs. (25), into Eqs. (21b,d) yields

$$N_{xy} = 0, \quad N_{yx} = 0, \quad M_{xy} = -D_{xy} \frac{\partial^2 w}{\partial x \partial y}, \quad M_{yx} = -D_{yx} \frac{\partial^2 w}{\partial y \partial x} \quad (28a-d)$$

where  $D_{xy}$  and  $D_{yx}$  are as defined by Eqs. (26). Equations (11), in views of Eqs. (21a,c) and Eqs. (28), become

$$(B+B_x) \frac{\partial^2 u_o}{\partial x^2} + \nu B \frac{\partial^2 v_o}{\partial x \partial y} - C_x \frac{\partial^3 w}{\partial x^3} = 0 \quad (29a)$$

$$(B+B_y) \frac{\partial^2 v_o}{\partial y^2} + \nu B \frac{\partial^2 u_o}{\partial x \partial y} - C_y \frac{\partial^3 w}{\partial y^3} = 0 \quad (29b)$$

$$(D+D_x) \frac{\partial^4 w}{\partial x^4} + (D_{xy} + D_{yx}) \frac{\partial^4 w}{\partial x^2 \partial y^2} + (D+D_y) \frac{\partial^4 w}{\partial y^4} - C_x \frac{\partial^3 u_o}{\partial x^3} - C_y \frac{\partial^3 v_o}{\partial y^3} = q(x, y) \quad (30)$$

Rearranging Eqs. (29) leads to

$$\frac{\partial^2 u_o}{\partial x^2} = \frac{C_x}{B+B_x} \frac{\partial^3 w}{\partial x^3} - \frac{B}{B+B_x} \nu \frac{\partial^2 v_o}{\partial x \partial y} \quad (31a)$$

$$\frac{\partial^2 v_o}{\partial y^2} = \frac{C_y}{B+B_y} \frac{\partial^3 w}{\partial y^3} - \frac{B}{B+B_y} \nu \frac{\partial^2 u_o}{\partial x \partial y} \quad (31b)$$

Assume, in the similar way as adopted by MASSONNET [6], that  $u_o$  and  $v_o$  appearing on the right hand side of Eqs. (31) take the forms

$$u_o = e_x \frac{\partial w}{\partial x}, \quad v_o = e_y \frac{\partial w}{\partial y} \quad (32a,b)$$

where  $e_x = (h+h_x)/2$ ,  $e_y = (h+h_y)/2$ . In view of Eqs. (32), Eqs. (31) become

$$\frac{\partial^2 u_o}{\partial x^2} = e'_x \frac{\partial^3 w}{\partial x^3} - e''_x \frac{\partial^3 w}{\partial x \partial y^2}, \quad \frac{\partial^2 v_o}{\partial y^2} = e'_y \frac{\partial^3 w}{\partial y^3} - e''_y \frac{\partial^3 w}{\partial x^2 \partial y} \quad (33a,b)$$

in which

$$e'_x = \frac{C_x}{B+B_x}, \quad e'_y = \frac{C_y}{B+B_y} \quad (34a,b)$$

$$e''_x = \frac{\nu B}{B+B_x} e_y, \quad e''_y = \frac{\nu B}{B+B_y} e_x \quad (34c,d)$$

Substituting Eqs. (33) into Eq. (30) results in the fourth order governing equation of the form

$$D_{xx} \frac{\partial^4 w}{\partial x^4} + 2H \frac{\partial^4 w}{\partial x^2 \partial y^2} + D_{yy} \frac{\partial^4 w}{\partial y^4} = q(x,y) \quad (35)$$

Integrating Eq. (33a) with respect to  $x$  and substituting the result into Eq. (21c) yield

$$M_x = -D_{xx} \frac{\partial^2 w}{\partial x^2} - D_1 \frac{\partial^2 w}{\partial y^2} \quad (36a)$$

In fact, the above equation contains an arbitrary function of  $y$ , but it is set to zero to insure a vanishing  $M_x$  for the case of zero curvatures. Similarly,  $M_y$  can be obtained in the form

$$M_y = -D_{yy} \frac{\partial^2 w}{\partial y^2} - D_2 \frac{\partial^2 w}{\partial x^2} \quad (36b)$$

Substituting Eqs. (28c,d) and (36) into Eq. (15e) yields

$$Q_x = -D_{xx} \frac{\partial^3 w}{\partial x^3} - (D_{yx} + D_1) \frac{\partial^3 w}{\partial x \partial y^2}, \quad Q_y = -D_{yy} \frac{\partial^3 w}{\partial y^3} - (D_{xy} + D_2) \frac{\partial^3 w}{\partial x^2 \partial y} \quad (37a,b)$$

In Eqs. (35) to (37), there are following new notations;

$$D_{xx} = D + D_x - e'_x C_x, \quad D_{yy} = D + D_y - e'_y C_y \quad (38a,b)$$

$$D_1 = \nu D + e''_x C_x, \quad D_2 = \nu D + e''_y C_y \quad (38c,d)$$

$$D_{xy} = (1-\nu)D + H_x + 2D' - 2C'e, \quad D_{yx} = (1-\nu)D + H_y + 2D' - 2C'e \quad (38e,f)$$



$$2H = D_{xy} + D_{yx} + D_1 + D_2 = 2D + H_x + H_y + 4D' - 4C'e + e''_x C_x + e''_y C_y \quad (38g)$$

which denote the elastic rigidities of an eccentrically stiffened plate.

Typical numerical results based on these proposed rigidities are compared with the experimental results obtained by ZEIDAN [9] and VICTORIANO [10] as shown in Figs. 4 to 6.

#### 4. COMPARISON OF RESULTS BY VARIOUS THEORIES

For the case of anticlastic bending, it can be seen that the two approximate theories yield essentially the same solution as the original theory of tenth order differential equation. In the two following sections, results by these three theories for two more simple problems are compared.

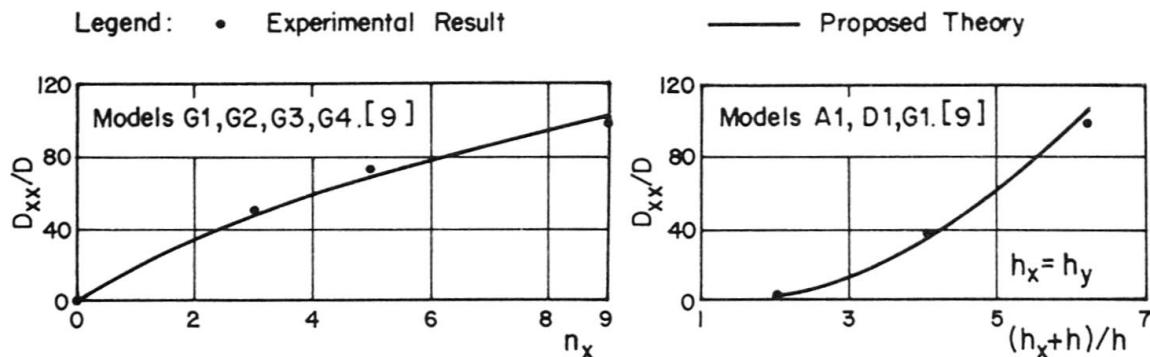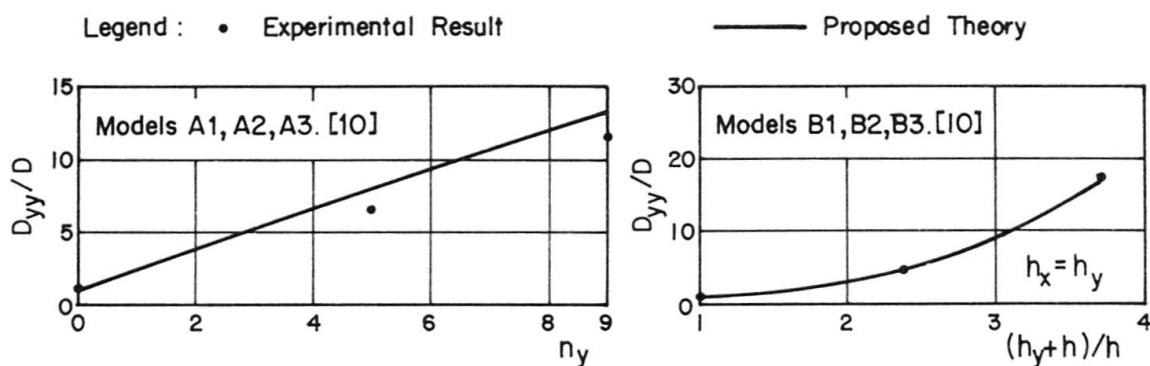Fig. 5 Bending Rigidity  $D_{xx}$ Fig. 6 Bending Rigidity  $D_{yy}$ 

#### 4.1 Cylindrical Bending

Considering the case of a plate which is infinitely long in  $y$ -direction, is subjected to a uniformly distributed load of intensity  $q_0$ , and has two simply supported edges at  $x = \pm a/2$ ; it is obvious that  $v_0$  and all derivatives of  $u_0$  and  $w$  with respect to  $y$  must vanish. It can be shown that, for the tenth order theory, the solution takes the form

$$u_0(x) = \frac{q_0 a^3 C_x}{D_{xx}(B+B_x)} \left[ \left(\frac{x}{a}\right)^3 - \frac{3}{4} \left(\frac{x}{a}\right) \right], \quad w(x) = \frac{q_0 a^4}{24 D_{xx}} \left[ \left(\frac{x}{a}\right)^4 - \frac{3}{2} \left(\frac{x}{a}\right)^2 + \frac{5}{16} \right] \quad (39a,b)$$

The same solution of pertinent displacements and stress resultants can also be obtained by the other two approximate theories.

#### 4.2 Simply Supported Plate

Consider the case of a rectangular plate simply supported along the edges  $x = 0$ ,  $x = a$ ,  $y = 0$  and  $y = b$ ; its boundary conditions are

$$v_0 = 0, \quad w = 0, \quad N_x = 0, \quad M_x^* = 0, \quad M_{z,\xi} = 0 \quad ; \quad \text{at } x = 0, \quad x = a \quad (40a-e)$$

$$u_0 = 0, \quad w = 0, \quad N_y = 0, \quad M_y^* = 0, \quad M_{z,\eta} = 0 \quad ; \quad \text{at } y = 0, \quad y = b \quad (40f-j)$$

To satisfy these boundary conditions, the displacement functions are taken in the form of double Fourier series as

$$u_0(x,y) = \sum_{n=1}^{\infty} \sum_{m=1}^{\infty} u_{mn} \cos(\alpha x) \sin(\beta y), \quad v_0(x,y) = \sum_{n=1}^{\infty} \sum_{m=1}^{\infty} v_{mn} \sin(\alpha x) \cos(\beta y) \quad (41a,b)$$

$$w(x,y) = \sum_{n=1}^{\infty} \sum_{m=1}^{\infty} w_{mn} \sin(\alpha x) \sin(\beta y) \quad (41c)$$

where  $\alpha = m\pi/a$ ,  $\beta = n\pi/b$ . The load function  $q(x,y)$  can be expressed also in the form of a double Fourier series as

$$q(x,y) = \sum_{n=1}^{\infty} \sum_{m=1}^{\infty} q_{mn} \sin(\alpha x) \sin(\beta y) \quad (42)$$

where

$$q_{mn} = \frac{4}{ab} \int_0^b \int_0^a q(x,y) \sin(\alpha x) \sin(\beta y) dx dy \quad (43)$$

Substituting Eqs. (41) and (42) into Eqs. (24) yields, for each harmonic  $m$  and  $n$ ,

$$\begin{pmatrix} k_{11} & k_{12} & k_{13} \\ k_{12} & k_{22} & k_{23} \\ k_{13} & k_{23} & k_{33} \end{pmatrix} \begin{pmatrix} u_{mn} \\ v_{mn} \\ w_{mn} \end{pmatrix} = \begin{pmatrix} 0 \\ 0 \\ q_{mn} \end{pmatrix} \quad (44)$$

in which

$$k_{11} = (B+B_x) \alpha^2 + B_1 \beta^2 + B_y^* \beta^4, \quad k_{12} = B_2 \alpha \beta \quad (45a,b)$$

$$k_{13} = -(C_x \alpha^3 + 2C' \alpha \beta^2 + C_y^* \alpha \beta^4), \quad k_{22} = (B+B_y) \beta^2 + B_1 \alpha^2 + B_x^* \alpha^4 \quad (45c,d)$$

$$k_{23} = -(C_y \beta^3 + 2C' \alpha^2 \beta + C_x^* \alpha^4 \beta) \quad (45e)$$

$$k_{33} = (D+D_x) \alpha^4 + (2D+H_x+H_y+4D') \alpha^2 \beta^2 + (D+D_y) \beta^4 + D_x^* \alpha^4 \beta^2 + D_y^* \alpha^2 \beta^4 \quad (45f)$$

For the approximation with a single governing differential equation of fourth order, Eq. (35), the boundary conditions are

$$w = 0, \quad M_x = 0 \quad ; \quad \text{at } x = 0, \quad x = a \quad (46a,b)$$

$$w = 0, \quad M_y = 0 \quad ; \quad \text{at } y = 0, \quad y = b \quad (46c,d)$$

To satisfy these boundary conditions and Eq. (35), the solution can be taken in the form of Eq. (41c), and  $w_{mn}$  is obtained as

$$w_{mn} = \frac{q_{mn}}{\Delta_{mn}} \quad (47)$$

where


$$\Delta_{mn} = D_{xx} \alpha^4 + 2H \alpha^2 \beta^2 + D_{yy} \beta^4 \quad (48)$$

and  $q_{mn}$  is defined by Eq. (43). Accordingly, the stress resultants can be determined by means of Eqs. (28c,d), (36), (37) and (41c).

The typical numerical results from the proposed theories, for the case of uniformly distributed load  $q(x,y) = q_0$ , are presented in Fig. 7 from which the accuracy of the approximate theories can be recognized. In addition, the results obtained by CUSENS, ZEIDAN and PAMA [3], and NISHINO, PAMA and LEE [4] are also put in this figure for comparison.

## 5. DISCUSSIONS AND CONCLUSIONS

In this study, the governing equations and natural boundary conditions of a plate with eccentric stiffeners are obtained by a rational analysis by means of a variational principle. The contributions of the top slab, the stiffening ribs

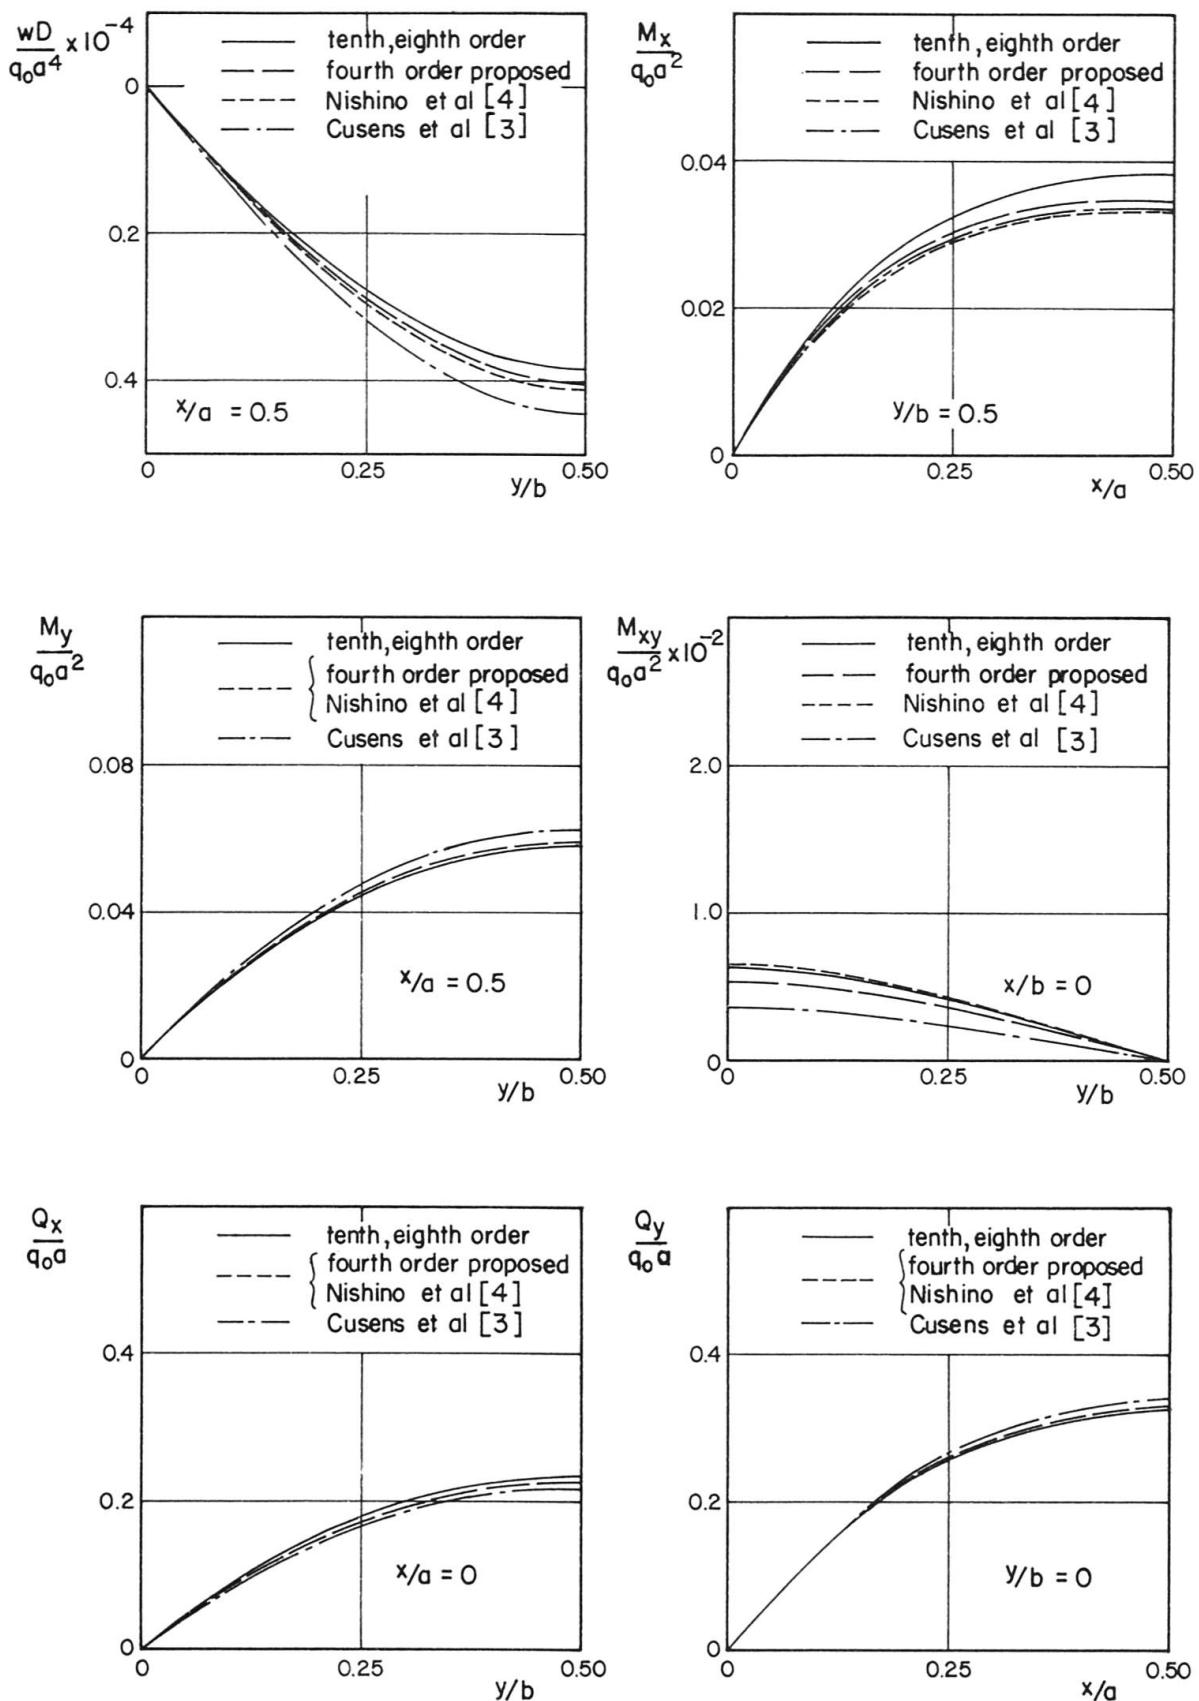

**Fig. 7** Comparison of Deflection and Stress Resultants for Simply Supported Plate with Eccentric Stiffeners ( $\nu = 0.15$ ,  $n_x = 9$ ,  $n_y = 12$ ,  $b_x = b_y = 36''$ ,  $t_x = t_y = 6''$ ,  $h_x = h_y = 16''$ ,  $h = 3''$ )

and the intersection of these ribs to the overall behavior of the system can be identified clearly. For the intersection of the ribs, the shear strain-displacement relation is assumed in the form of Eq. (7) with  $\bar{h}$  being proposed as in Eq. (27). If disregarding the contributions by the in-plane displacements, the assumption adopted in these equations is equivalent to computing the torsional moments, due to the intersection of two orthogonal ribs at  $x = x_j$  and

$y = y_i$ , by assuming that the shear stress  $\tau_{xy}$  in the intersection is constant and equal to that in the top slab at  $x = x_j$ ,  $y = y_i$  and  $z = h/2$ .

Neglecting the lateral bending and the bimoments of the ribs appearing in the original tenth order theory leads to the approximate theory with an eighth order governing differential equation, which slightly differs from those obtained by other investigators [6,7]. This difference is due to the appropriate incorporation of the stiffness of the rib intersection in this study. The approximation with a fourth order governing differential equation of Huber's type [1] is derived in the similar way as adopted by MASSONNET [6] and in such a way that the solution for the case of the anticlastic bending is essentially identical to those by the tenth order and eighth order theories.

It can be shown analytically also that these theories give essentially the same solution for the case of a plate under a cylindrical bending. Furthermore, the numerical results by these theories for a simply supported plate subjected to a uniform load are compared in Fig. 7. Also included in these figures are the results by fourth order theories by CUSENS, ZEIDAN and PAMA [3] and NISHINO, PAMA and LEE [4]. It is obvious that the results by the eighth order theory agree best with the tenth order theory. Among the three fourth order theories compared, the proposed one agrees best with the tenth order theory for most slab sizes considered herein.

Lastly, it should be mentioned that this study is based in part on the dissertation of the senior author [11], in which the design charts of reinforced concrete slabs supported on rows of columns are also prepared by means of the proposed fourth order theory.

## NOTATIONS

$A_x, A_y$	cross-sectional area of the ribs in x and y-directions, respectively	$D$	$Eh^3/12(1-\nu^2)$
$a$	length of plate in x-direction	$D_x$	as defined by Eq. (22e)
$B$	$Eh/(1-\nu^2)$	$D_x^*, D'$	as defined by Eqs. (22j, l)
$B_x$	as defined in Eq. (22a)	$D_{xx}, D_{yy}$	bending rigidities of an orthotropic plate, in x and y-directions, respectively
$B_x^*, B'$	as defined in Eqs. (22g, j)	$D_{xy}, D_{yx}$	pure torsional rigidities
$B_1$	$(1-\nu)B/2 + B'$	$D_1, D_2$	coupling rigidities in x and y-directions, respectively
$B_2$	$(1+\nu)B/2 + B'$	$e$	$C'/B_1$
$b$	length of plate in y-direction	$2H$	total torsional rigidity
$b_x, b_y$	spacings of the ribs in x and y-directions, respectively	$H_x$	as defined in Eq. (22f)
$C_x$	as defined in Eq. (22d)	$h$	thickness of the top slab
$C_x^*, C'$	as defined in Eqs. (22h, k)		



$h_x, h_y$	heights of ribs in x and y-directions, respectively	$n_x, n_y$	number of ribs in x and y-directions, respectively
$\bar{h}$	$\sqrt{h(h+h_y)}/2$	$p$	subscript denoting top slab
$I$	subscript denoting intersection of two orthogonal ribs	$R$	corner force
$M_x^*, M_y^*$	supplemented bending moments in x and y-directions per unit width along y and x axes, respectively	$t_x, t_y$	thickness of the ribs in x and y-directions, respectively
$M_{z,\xi}$	bending moments about z axis of the ribs in x and y-directions per unit width along y and x axes, respectively	$u_o, v_o$	displacements of the middle plane of the top slab in x and y-directions, respectively
$M_{z,\eta}$	bimoments of the ribs in x and y-directions per unit width along y and x-directions, respectively	$V_{ij}$	volume integral domain for rib intersection at point $(x_j, y_i)$
$M_{w,\xi}$		$w$	plate deflection in z-direction
$M_{w,\eta}$		$\xi, \eta$	ribs spanning in x and y-directions, respectively

## REFERENCES

1. HUBER, M.T.: Die Theorie der Kreuzweise bewehrten Eisenbeton-platten nebst Anwendungen auf mehrere bautechnisch wichtige Aufgaben über Rechteckige Platten. Bauingenieur, Vol. 4, 1923, p. 354-360, 392-395.
2. BARES, R., and MASSONNET, C.: Analysis of Beam Grids and Orthotropic Plates. Crosby Lockwood and Sons, London, 1968.
3. CUSENS, A.R., ZEIDAN, M.A., and PAMA, R.P.: Elastic Rigidities of Ribbed Plates. Building Science, Vol. 7, 1972, p. 23-32.
4. NISHINO, F., PAMA, R.P., and LEE, S.L.: Orthotropic Plates with Eccentric Stiffeners. Publications, IABSE, Vol. 34-II, 1974, p. 117-129.
5. PFLÜGER, A.: Zum Beulproblem der Anisotropen Rechteck Platte. Ingenieur Archiv, Vol. 19, 1947, p. 111-120.
6. MASSONNET, C.: Plaques et Coques Cylindriques Orthotropes à Nervures Dissymétriques. Publications, IABSE, Vol. 19, 1959, p. 201-230.
7. CLIFTON, R.J., CHANG, J.C., and AU, T.: Analysis of Orthotropic Plate Bridges. Proc. ASCE, J. Struct. Div., Vol. 89, No. ST5, 1963, p. 133-172.
8. TIMOSHENKO, S., and GOODIER, J.N.: Theory of Elasticity. McGraw-Hill Book Co., Inc., New York, 1951.
9. ZEIDAN, M.A.: Torsional and Flexural Rigidities of T-Beam Bridge Decks. Ph.D. Thesis, Univ. of Dundee, Scotland, 1970.
10. VICTORIANO, R.O.: An Experimental Investigation on the Rigidities of Ribbed Slabs. M.Eng. Thesis, Asian Inst. of Tech., Bangkok, Thailand, 1974.
11. HOVICHITR, I.: An Analysis of Waffle Slabs. D.Eng. Dissertation, Asian Inst. of Tech., Bangkok, Thailand, 1977.