

<b>Zeitschrift:</b>	IABSE reports of the working commissions = Rapports des commissions de travail AIPC = IVBH Berichte der Arbeitskommissionen
<b>Band:</b>	4 (1969)
<b>Rubrik:</b>	Theme VI: Design methods taking into account the former items; Use of mathematical models (elasticity, plasticity); Definition and choice of limits states; Procedures to introduce safety concepts

### **Nutzungsbedingungen**

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

### **Conditions d'utilisation**

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

### **Terms of use**

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

**Download PDF:** 24.01.2026

**ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>**

## DISCUSSION PRÉPARÉE / VORBEREITETE DISKUSSION / PREPARED DISCUSSION

**Structural Safety Specifications Based on Second-Moment Reliability Analysis**

Spécifications de la sécurité des structures basées sur l'analyse des moments de deuxième ordre

Bauwerkssicherheit mittels einer auf den zweiten Momenten beruhenden Wahrscheinlichkeitsrechnung

**C. ALLIN CORNELL**

Associate Professor of Civil Engineering  
Massachusetts Institute of Technology  
Cambridge, Mass., U.S.A.

The primary aim of the symposium and of Themes VI and VII in particular is to develop theoretically sound safety specification procedures that remain practical. Semi-probabilistic codes are admittedly only partially successful, because they lack the dependence on analytical probability theory necessary to promote consistency and interpretation of the means and the ends of structural codes. The purpose of this discussion is to demonstrate that a variety of simple code formats, including some identical to present proposals, can be developed in a manner rigorously consistent with a probability theory. To be sure, certain analytical and algebraic approximations are adopted in order to achieve the desired simplicity of final code form, but the approximations, first, are believed to be reasonable and, second, are made in a clear way that opens them to analytical, quantitative study and to informed criticism. Alternatively, since it is demonstrated what approximations in the theory are necessary to achieve the simple code forms in use today, these present codes can be evaluated with respect to these implicit approximations. The results presented here should prove useful in guiding the discussion, interpretation, and selection of numerical values of factors in presently used and proposed codes, as well as in pointing towards systematic improvements in codes.

Second-Moment Reliability; The probability theory upon which the developments here are based is in itself an approximate theory<sup>(1)</sup>. It is a first-order theory only; it is based on only the mean values and second moments of random variables. The latter moment is a first-order measure of uncertainty. In functional relationships among random variables the theory retains only the first-order or linear terms in the random components, i.e., in the deviations from the mean.

For example, the force capacity,  $W$ , of a tensile bar is uncertain if the area,  $A$ , and yield stress,  $Y$ , are both uncertain. In this theory the uncertainty in  $W$  would be measured solely through its variance (not its entire probability distribution). The mean and variance of  $W$  would be found from those of  $A$  and  $Y$  using a first-order expansion about their means

$$W = AY = m_A m_Y + m_A(Y - m_Y) + m_Y(A - m_A)$$

in which  $m$  denotes the mean and  $\hat{=}$  denotes equality to first-order approximation. Then applying the expectation and variance operation

$$m_W = m_A m_Y \quad (1)$$

$$\sigma_W^2 = m_A^2 \sigma_Y^2 + m_Y^2 \sigma_A^2 + 2 m_A m_Y \rho_{A,Y} \sigma_A \sigma_Y \quad (2)$$

in which  $\sigma^2$  denotes variance and  $\rho$  correlation coefficient. The "exact" result for the mean of  $W$  is

$$m_W = m_A m_Y (1 + \rho_{A,Y} V_A V_Y) \quad (3)$$

in which  $V$  denotes the coefficient of variation or  $\sigma/m$ . If  $A$  and  $Y$  are uncorrelated, the exact result for  $V_W^2$  is  $V_A^2 + V_Y^2 + V_A V_Y$ , which should be compared to  $V_A^2 + V_Y^2$ , the result implicit in the equations above. Clearly the first-order approximations may not be accurate if the coefficients of variation are large. It is important to note that no assumptions (in particular, no Gaussian assumptions) have been made about the distributions of the variables.

The total is a self-consistent, distribution-free theory of uncertainty that is very easy to apply to practical engineering problems and that provides accuracy which may be sufficient for many real problems, in particular in normative (or prescriptive) engineering specifications and codes of practice.

Although the theory does not give a complete description of the uncertainty in any particular variable, it can be argued that it is as accurate as structural building applications can justify. Statistical data are, and perhaps always will be, insufficient to determine the distributions of material strengths, dimensions, and loads. In any case, the variables in conventional structural practice represent highly idealized strengths and loads (e.g., homogeneous material strengths, pseudo-static forces, and uniformly distributed floor loads). Adoption of a first-order probability theory as a basis of structural safety would perhaps be analogous to the long standing dependence of the profession on linear, elastic theory to predict forces and deformations in reinforced concrete structures; in both cases, the results are known to be approximations, but they are 1) simple, yet self-consistent, 2) an improvement upon the state-of-art prior to their adoption, and 3) capable of being systematically modified or replaced as the profession accumulates knowledge.

Characterization of Variables; Within this approach to structural safety and performance specification, a variable,  $X$ , is characterized by two numbers, a best estimate and an uncertainty measure. The former corresponds to an expected value or mean,  $m_X$ , the latter to a variance,  $\sigma_X^2$ , standard deviation,  $\sigma_X$  or coefficient of variation,  $V_X$ . The expected value represents the profession's best prediction of a variable (e.g., material strength, member deflection, peak wind force). It is conducive to systematic progress of the profession that this best estimate, rather than a conservative estimate, be a product of any research investigation or committee report. The uncertainty value associated with a variable should be a measure of the various sources and kinds of uncertainty surrounding it. These include both "natural", inherent variability (such as that observed in wind velocities and material strengths) and the uncertainty associated with the imperfect tools of the profession (simplifying assumptions, incomplete knowledge, human constructors, etc.).

The treatment of the latter sources of uncertainty probabilistically is a major distinction between this code proposal and most others. This procedure is, however, consistent with the most modern and most practical concept of probability(2,3,4), and it avoids difficult-to-reconcile distinctions among the interpretations, analyses, and code treatments of the various sources of uncertainty. For example, should the uncertainty in the initial shape of steel columns be con-

sidered as natural (or "random") variability and included in determining a nominal or "characteristic" strength for a member, or should it be accounted for in a multiplying strength reduction factor designed to account for fabrication variabilities? It is clearly in the latter factor in U.S. codes, whereas European tests<sup>(5)</sup> are aimed at placing it in the former value. When this is settled, what should be done with minor construction errors which cause accidental eccentricities in the applied load? Indeed, what virtually all codes accept as "inherent" or "random" variability in the strength of steel can be, on closer inspection, decomposed into a variety of identifiable sources which are in part systematic<sup>(6)</sup>. Similarly, should that uncertainty in snow loads which is associated with its spacial disposition on a roof be considered as "random" or professional? Since the profession lacks methods of analyzing snow accumulation on irregular roof shapes, it has been proposed<sup>(7)</sup> to collect statistical data as if the problem were a "random" one. The distinctions in types of uncertainty are difficult, because they are not "basic" but dependent in part, it seems, on the data available at the moment and on the level of idealization in the conventional treatment of the phenomenon. In fact, these distinctions are unnecessary if all are treated as contributions to a total measure of uncertainty, denoted  $\sigma$ .

It is useful (but not technically necessary, as will be demonstrated) to define nominal or "characteristic values" of variables. For a material strength, the characteristic value in the CEB code<sup>(8)</sup> is one which a specified (large) fraction of all standard test results exceed. In a parallel way, in this first-order theory a characteristic strength,  $R^*$ , would be

$$R^* = m_R - k_R \sigma_R = m_R(1 - k_R V_R) \quad (4)$$

in which  $k_R$  is a specified constant, the same for all materials, members, etc. A characteristic load or applied force,  $S^*$ , is defined in an analogous way,  $+k_S$  replacing  $-k_R$ . Because CEB code specifications present the formula for the characteristic strength in the same form as Eq. 4, it is important to point out the differences between the CEB and this proposal.

First, the CEB code (and others like it) set the characteristic value at a specified fractile of the distribution. Thus the factor  $k_R$  must depend upon the shape of this distribution (and in some cases on  $m$  and  $\sigma$  as well). For the levels of probabilities usually specified by present codes (1 to 10%), the value of  $k_R$  is not too sensitive to the distribution, but, of course, the distributions of interest are not well established, and they probably change from place to place and time to time. This proposed code basis, being only first-order, does not attempt to distinguish between distribution shapes;  $k_R$ , not the probability level, is fixed by the code.

Second, the CEB code would base  $\sigma_R$  solely on standard tests of standard materials specimens<sup>(8)</sup>. In the proposed code, the interest is on strength in place. Therefore,  $\sigma_R$  should include, in addition to the "inherent" dispersion observed in standard tests, the uncertainties associated with correlating these results to in-place strengths (e.g., construction versus laboratory practice, weather conditions, full-size member versus standard specimen, etc.). In short, in this proposal  $\sigma_R$  should measure all the uncertainty that the engineer in fact faces when asked to predict the strength of the material in an actual beam to be built to his specifications.

Finally, the proposed code differs from the CEB in that it includes characteristic values for the strength of members (or assemblies, perhaps) and the force applied to members (in addition to the strength of materials and the environmental loads). It is member capacity and member force which ultimately determine safety. They depend, of course, on material strength and environmental loads, but only in part. The best prediction of and the uncertainty in the

strength of a member depend upon the dimensions of the member and upon incompletely understood microscopic behavior of the material or materials of which it is constructed, as well as upon material strength. The first-order probability theory makes approximate analysis of these factors feasible.

For example, consider the moment resistance of the cross-section of a simple, rectangular reinforced concrete beam with width  $B$ , depth-to-steel  $D$ , concrete strength  $C$ , and total steel yield force  $T$ . Adopting conventional structural theory (nothing more can be justified in a code), the (under-reinforced) yield moment resistance,  $R$ , of the cross-section can be written

$$R = TD\left(1 - n \frac{T}{BDC}\right) \Delta \quad (5)$$

in which  $n$  is a constant dependent upon the "theory" used, and  $\Delta$  is a random factor introduced to describe the dispersion about the predicted resistance that is observed in laboratory test results in which the values of  $T$ ,  $D$ ,  $B$ , and  $C$  are known by relatively precise measurement;  $\Delta$  is the (random) ratio of observed to predicted resistance. For an unbiased prediction formula,  $m_{\Delta} = 1$ . The uncertainty value  $\sigma_{\Delta}^2$  is a measure of the accuracy of the prediction formula, or, in short, of the professional uncertainty inherent in the use of this theory.

Under first-order probability theory the mean and variance of the resistance become<sup>(8)</sup>

$$m_R = m_T m_D \left(1 - n \frac{m_T}{m_B m_D m_C}\right) m_{\Delta} \quad (6)$$

$$\sigma_R^2 = \sum_i \left( \frac{\partial R}{\partial X_i} \Bigg| \bar{m} \right)^2 \sigma_{X_i}^2 \quad (7)$$

in which the  $X_i$  are  $T$ ,  $D$ ,  $B$ ,  $C$  and  $\Delta$ , and the term in parentheses denotes the partial derivative of  $R$  with respect to a particular variable  $X_i$ , evaluated at the means of the variables. (It has been assumed that the  $X_i$ 's are uncorrelated.) Note that the uncertainty in each variable contributes to the uncertainty in  $R$  in a manner dependent both upon the uncertainty in that variable and upon the sensitivity of  $R$  to deviations in the variable.

The characteristic value of the member resistance is found by substituting into Eq. 4. Note that it is not simply the value of  $R$  obtained by substituting characteristic values of strengths,  $T^*$  and  $C^*$ , for  $T$  and  $C$  in Eq. 5, as is implicit in present codes.

The lack of sensitivity of resistance variables to certain factors can be exploited to simplify significantly the procedure above. It may be sufficient for most code purposes to assume in the computation of the uncertainty measure  $V_R$  that the relationship between  $R$  and the other variables is of the form<sup>(10)</sup>

$$R = c M F P \quad (8)$$

in which  $c$  is a constant,  $M$  is a material variable,  $F$  is a fabrication-dependent member dimension variable, and  $P$  is a professional factor. (In the reinforced-concrete beam example above,  $T$ ,  $D$ , and  $\Delta$  can be associated with  $M$ ,  $F$ , and  $P$ , respectively. The constant  $c$  is simply  $1 - (n m_T)/m_B m_D m_C$ .) In this case one obtains simply

$$V_R^2 = V_M^2 + V_F^2 + V_P^2 \quad (9)$$

The uncertainty in  $R$  is made up of uncertainty in material strength, fabrication, and professional factors. If this simplification is adopted the characteristic resistance is simply

$$R^* = m_R \left(1 - k_R V_R\right) = m_R \left(1 - k_R \sqrt{V_M^2 + V_F^2 + V_P^2}\right) \quad (10)$$

In the reinforced concrete example one obtains

$$R^* = \left[ m_T m_D \left( 1 - \eta \frac{m_T}{m_B m_D m_C} \right) m_\Delta \right] \left( 1 - k_R \sqrt{V_M^2 + V_F^2 + V_P^2} \right) \quad (11)$$

Since the coefficients of variation are probably rather insensitive to beam size and other factors, the last term might be the same for all beams throughout a design project, implying that the computation of theoretically consistent characteristic resistances of beams need be no more difficult than present computation of nominal resistances. Both involve calculation of the value of the first factor, that in square brackets. Note again, however, that in the proposed code mean values, not nominal values, are involved in these calculations. An implication is that a by-product of the calculation is the best professional prediction of the resistance of the cross-section, i.e., the first factor in Eq. 11; this best estimate is never obtained in present calculation procedures.

Similarly, characteristic loads and applied member forces can be determined as

$$S^* = m_S + k_S \sigma_S = m_S (1 + k_S V_S) \quad (12)$$

The uncertainty measure in an applied member force should account for both the customary observed, inherent dispersion in environmental loads and the many professional uncertainties such as those involved in translating loads into member forces (i.e., in the structural analysis used), in approximating dynamic by static behavior, in idealizing spatial load variations, in predicting future changes in the loading environment, and in neglected (abnormal and unforeseen) loading combinations.

Again for many purposes it may be sufficient to assume in uncertainty calculations that the applied member force,  $S$ , is

$$S = c T E \quad (13)$$

in which  $T$  is the environmental load or "field strength"<sup>(7)</sup> and  $E$  is a factor, perhaps with mean 1, reflecting professional engineering uncertainties. (The constant  $c$  is related to the structural analysis which translates load into applied force.) Then  $V_S^2$  is simply  $V_T^2 + V_E^2$ , and the characteristic applied force is simply

$$S^* = m_S (1 + k_S \sqrt{V_T^2 + V_E^2}) \quad (14)$$

$V_T$  can be obtained from load environment measurements and analysis, while  $V_E$  must be judged, and/or obtained from calibration<sup>(10)</sup> of existing codes (although physical measurements of forces in full-scale structures subjected to known loads could provide partial information). It should be clear that how the uncertainty in  $S$  is proportioned between  $T$  and  $E$  will depend in part upon how the load is idealized (e.g., winds as pseudo-static gusts or as dynamic velocity time-histories), but that the net uncertainty in  $S$  may be unchanged. (It could be less, if the particular idealization is more accurate.)

Safety Specification Alternatives; Codes of practice must in some way cause the engineer to specify a structure which has a (best prediction of the) resistance sufficiently in excess of the (best prediction of the) applied force to insure adequate safety and performance without unduly penalizing the cost of the structure. This requirement can and has been effected in a variety of code "formats" (e.g., working stress, load factors, semi-probabilistic, etc.) In theoretical structural safety terms the purpose of the code is usually to promote a pre-determined level of reliability. In this section it will be demonstrated that this reliability requirement can be expressed in a variety of convenient code formats, all technically equivalent in that they will cause designers to specify the same mean resistance.

Satisfactory structural safety (or performance) will be achieved if the resistance,  $R$ , exceeds the applied force  $S$ , that is, if the safety margin  $M = R - S$  exceeds zero. The mean and variance of  $M$  are

$$m_M = m_R - m_S \quad (15)$$

$$\sigma^2_M = \sigma^2_R + \sigma^2_S \quad (16)$$

The reliability of the structure (or member) is defined as the probability that  $M$  exceeds zero. In terms of a first-order probability theory reliability is measured by the number of standard deviations  $\sigma_M$  by which the mean  $m_M$  exceeds zero (1,10). Call this number  $\beta$ . The larger  $\beta$ , the more reliable the member. To impose a required reliability a code must require that

$$m_M \geq \beta \sigma_M \quad (17)$$

The appropriate value for  $\beta$  is a matter of serious professional judgement. Values of about 4 have been found to be consistent with certain present codes. (10,11) The specified value of  $\beta$  should be related to the consequences of the type of failure under consideration and to the marginal cost of increasing the resistance. Higher reliability, i.e., a higher value of  $\beta$  should be required of sudden brittle shear failure modes than of ductile yielding, for example. If the mode of "failure" (or "limit state") under study is simply undesirable (but not unsafe) cracking or deflection, significantly lower values of  $\beta$  (2 perhaps) are appropriate. Although it is not possible at higher values of  $\beta$  to associate even approximate numerical probabilities to values of  $\beta$ , there is some justification (9) for assuming that at these levels an increase of  $\beta$  by 1/2 implies about an order of magnitude decrease in the complement of the reliability, i.e., the probability of failure. The (desirable, but impractical) numerical evaluation of reliabilities discussed in theoretical reliability studies depends on precise knowledge of the probability distribution of  $M$ . This in turn depends on the distributions of  $R$  and  $S$ . These will probably never be known accurately, for they are affected by significant sources of professional uncertainty which are difficult to model and to measure.

This single technical safety requirement (17) can be expressed in a variety of alternate ways. It is valuable to display some of these formats and the approximations and assumptions necessary to achieve them. Direct substitution of Eq. 15 and 16 produces the safety requirement in the "safety margin form"

$$m_R \geq m_S + \beta \sqrt{\sigma_R^2 + \sigma_S^2} \quad (18)$$

Rearrangement leads to the "safety factor" form

$$m_R \geq \theta m_S \quad (19)$$

in which  $\theta$  is a function of  $V_R$ ,  $V_S$ , and  $\beta$ ,

$$\theta = (1 + \beta \sqrt{V_R^2 + V_S^2} - \beta^2 V_R^2 V_S^2) / (1 - \beta^2 V_R^2) \quad (20)$$

It is shown in Figure 1 for  $\beta = 4$ . Substitution of Eq. 10 and Eq. 12 for nominal values yields the "nominal safety factor" form

$$R^* \geq \theta^* S^* \quad (21)$$

in which  $\theta^*$  is a function of  $V_R$ ,  $V_S$ ,  $\beta$ ,  $k_R$ , and  $k_S$ :

$$\theta^* = \frac{1 - k_R V_R}{1 + k_S V_S} \theta \quad (22)$$

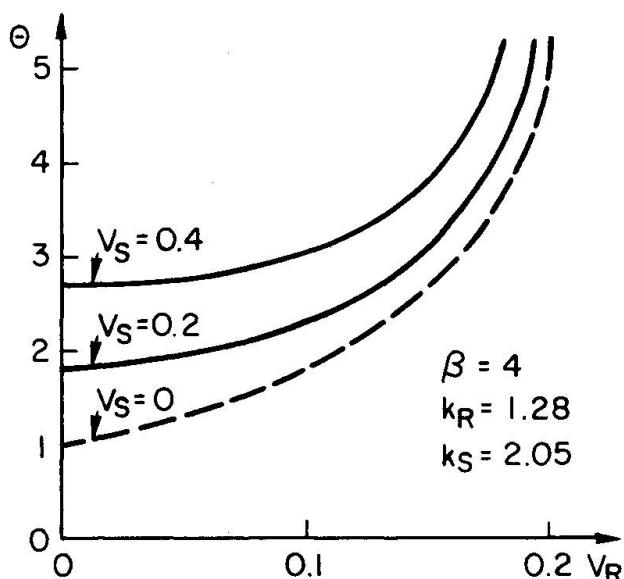


Figure 1

If  $V_R > 1/\beta$ , then it is not possible to obtain the desired level of reliability, since  $\sigma_M$  (which is greater than or equal to  $\sigma_R = V_R m_R$ ) will grow too fast with  $m_R$  to permit  $m_M (=m_R - m_S)$  to exceed  $\beta \sigma_M$ . At larger values of  $m_R$ ,  $V_R$  might very well be smaller, of course. On the other hand, a simplified practical code might simply overlook this problem by setting  $\theta^*$  equal to an approximate, linearly increasing value for  $V_R \geq 0.1$ .

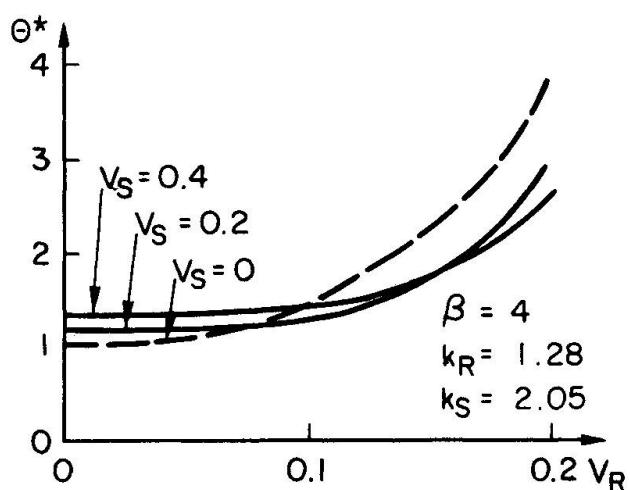


Figure 2

than about 5% for  $\sigma_R/\sigma_S$  in the entire range of 1/3 to 3. With this approximation Eq. 18 can be written in the "split form"

$$\phi m_R \geq \gamma_S m_S \quad (24)$$

in which

$$\phi = 1 - \beta \alpha V_R \quad \text{and} \quad \gamma_S = 1 + \beta \alpha V_S \quad (25)$$

Note that these strength reduction and load increase factors depend only on their corresponding uncertainty measures,  $V_R$  and  $V_S$ , respectively, (and, of course, on

It is shown in Figure 2 for  $\beta = 4$ ,  $k_R = 1.28$ , and  $k_S = 2.05$ . Notice that in the latter case  $\theta^*$  is quite insensitive to  $V_R$  and  $V_S$  over the range of interest; this is an advantage of the nominal form. It is important to recognize that the values of  $k_R$  and  $k_S$  are, technically speaking, arbitrary. Increasing  $k_R$  will reduce  $R^*$  and reduce  $\theta^*$  to compensate, leaving the required value of  $m_R$  unchanged. The values of  $k_R$  and  $k_S$  can be chosen to satisfy legal problems surrounding quality assurance and liability, or to permit simplification of the code as will be discussed below.

The reliability theory adopted implies that you cannot obtain high reliability with highly uncertain resistances.

A variety of split factor code formats similar to the ACI or CEB forms are also possible. The possibility of decoupling these factors was recognized by N. C. Lind(11,12) who has defined and demonstrated the notion of "practical equivalence" of code formats. Lind showed that, with remarkable numerical accuracy,

$$\sqrt{\sigma_R^2 + \sigma_S^2} \approx \alpha (\sigma_R + \sigma_S) \quad (23)$$

in which  $\alpha$  is a constant chosen to fit the expected range of ratios of  $\sigma_R$  to  $\sigma_S$ . A value of  $\alpha = 0.7$  will give errors of less

the reliability level  $\beta$ ). Note that, approximately,  $\theta \approx \gamma_s/\phi$ . A "nominal split form" can be written as

$$\phi^* R^* \geq \gamma_s^* S^* \quad (26)$$

in which

$$\phi^* = (1 - \beta \alpha V_R) / (1 - k_R V_R) \text{ and } \gamma_s^* = (1 + \beta \alpha V_S) / (1 + k_S V_S) \quad (27)$$

If combined loads are involved, then  $S$  is made up of the sum of two applied force effects, say,  $S_D + S_L$ , signifying dead and live loads. Assuming they are uncorrelated and using Eq. 23,  $\sigma_S \approx \alpha(\sigma_{S_D} + \sigma_{S_L})$ . Then, in Eq. 24,  $\gamma_S m_S$  can be replaced by

$$\begin{aligned} \gamma_S m_S &= m_S (1 + \beta \alpha V_S) = m_S + \beta \alpha \sigma_S \approx m_{S_D} + m_{S_L} + \beta \alpha^2 \sigma_{S_D} + \beta \alpha^2 \sigma_{S_L} \\ &= m_{S_D} (1 + \beta \alpha^2 V_{S_D}) + m_{S_L} (1 + \beta \alpha^2 V_{S_L}) = m_{S_D} \gamma_D + m_{S_L} \gamma_L \end{aligned} \quad (28)$$

in which a dead load and a live load factor are defined, as indicated, in terms of  $\beta$  and their respective uncertainty factors  $V_{S_D}$  and  $V_{S_L}$ . This result is due to M. K. Ravindra of the University of Waterloo.

A "split load factor form" results,

$$\phi^* R^* \geq \gamma_D^* S_D^* + \gamma_L^* S_L^* \quad (29)$$

if characteristic live and dead loads are used and if nominal load factors are defined as, for example,

$$\gamma_D^* = (1 + \beta \alpha^2 V_{S_D}) / (1 + k_S V_{S_D}) \quad (30)$$

This factor will be relatively insensitive to  $V_{S_D}$ . Combined loads involving two or more transient loads(7) can be treated in a similar way provided the proper model is used. In coordination with the maximum wind load, for example, one should use the normal or "steady-state" live load moments, not those of the maximum (in time) live load.

Finally, it is useful to demonstrate that a consistent code format is possible which bases the characteristic resistances and applied forces on only certain portions of the total uncertainty. For example, if it is considered desirable to adopt a format analogous to the CEB code, the characteristic resistance,  $R'$ , will be based on the uncertainty in material strength component only, i.e., on  $V_M$ ,

$$R' = m_R (1 - k_R V_M) \quad (31)$$

and the characteristic applied load on the load environment uncertainty,  $V_T$ , only

$$S' = m_S (1 + k_S V_T) \quad (32)$$

(Actually, as was discussed above, the CEB defines only characteristic material strengths, not characteristic member resistances.) Adopting the assumption in Eq. 9, we can define the "other" uncertainty,  $V_0$ , in the resistance as

$$V_0^2 = V_R^2 - V_M^2 = V_F^2 + V_P^2 \quad (33)$$

With the parallel assumption for applied force, Eq. 14, the code specification becomes the "separated form"

$$\phi' R' \geq \gamma_s' S' \quad (34)$$

in which  $\phi' = (1 - \beta \alpha V_R) / (1 - k_R V_M)$  and  $\gamma_s' = (1 + \beta \alpha V_S) / (1 + k_S V_T)$

If it is assumed that  $1 - \beta \alpha V_R \approx 1 - \beta \alpha^2 V_0 - \beta \alpha^2 V_M \approx (1 - \beta \alpha^2 V_0)(1 - \beta \alpha^2 V_M)$ , then

$$\phi' \approx (1 - \beta \alpha^2 V_0) \frac{(1 - \beta \alpha^2 V_M)}{(1 - k_R V_M)} \text{ and, similarly, } \gamma_s' = (1 + \beta \alpha^2 V_E) \frac{(1 + \beta \alpha^2 V_T)}{(1 + k_S V_T)} \quad (36)$$

Note that since  $k_R$  and  $V_S$  are technically arbitrary, there is freedom in their choice. If the choices are  $k_S = k_R = \beta \alpha^2$ , then, simply

$$\phi' \approx 1 - \beta \alpha^2 V_0 \quad \text{and} \quad \gamma'_S \approx 1 + \beta \alpha^2 V_E \quad (37)$$

In addition, one could write, with additional approximation,

$$\phi' = 1 - \beta \alpha^2 V_0 \approx 1 - \beta \alpha^3 V_p - \beta \alpha^3 V_F = (1 - \beta \alpha^3 V_p)(1 - \beta \alpha^3 V_F) = \phi'_p \phi'_F \quad (38)$$

The advantage of making all of these approximations is that it further uncouples the problem, yielding strength reducing and applied force increasing factors that depend only on the "less tangible", fabrication and professional uncertainty,  $V_F$ ,  $V$ , and  $V_E$ . The "inherent" variation,  $V_M$  and  $V_T$ , influences only the characteristic values  $R'$  and  $S'$ . This is very closely parallel to the ACI and CEB codes. The recent alterations to the basic CEB format involve factoring the strength reduction factor and load factor into several independent factors with identifiable "causes", similar to  $\phi' = \phi'_F \phi'_p$  here. The process demonstrated here for  $V_F$ ,  $V_p$ , and  $\phi'_F$ ,  $\phi'_p$  can, of course, be extended to the finer breakdown proposed by the CEB.

If there are combined loads, the "separated load factor" form is

$$\phi' R' \geq \gamma'_D S'_D + \gamma'_L S'_L \quad (39)$$

in which, for example, (with  $k_S = \beta \alpha^3$ ),

$$\gamma'_D = 1 + \beta \alpha^3 V_{ED} \quad (40)$$

where  $V_{ED}$  is the professional uncertainty in translating the dead load to applied force. The characteristic dead load effect in this case is

$$S'_D = m_S D (1 + k_S V_D) \quad (41)$$

in which it is assumed  $V_{SD}^2 = V_D^2 + V_{ED}^2$ ,  $V_D$  being the uncertainty in the dead load "environment" itself.

Discussion: It is the author's hope that this discussion will aid professional committees who must choose reasonable and consistent values for the various factors in a code such as the CEB. The theoretical basis is in axiomatic probability theory, which does not require that all probabilities be defined as relative frequencies; this permits all uncertainties to be treated in a parallel and consistent manner. For example, this theory demonstrates that uncertainties in member dimensions should not be included in a load factor ( $\gamma_S$  of the CEB) but in a strength reduction factor ( $\phi$  of this proposal); if the designer wants to obtain a safer structure by increasing the specified dimensions, uncertainty in the dimensions will influence the reliability actually achieved, a fact which is not properly reflected if the influence of this uncertainty is incorporated in the nominal load. Also, the factor  $\alpha^3$  which permits  $\phi$  and  $\gamma$  factors to be less stringent, can be considered to be reflecting the theoretically small likelihood that one member will be simultaneously poorly fabricated, the recipient of low strength material, heavily loaded, etc. As another example of the benefit of the theory, it becomes clear that the influence of seriousness of failure should be reflected in the choice of the reliability level (here,  $\beta$ ) independently of the uncertainty levels ( $\sigma$  or  $V$ ) in loads, materials, etc; the reliability value should, however, affect all factors  $\phi$  and  $\gamma$  (here through  $\beta$ ) and not simply take the form of an additional multiplicative factor ( $\gamma_C$  in the CEB). In any case, and at any time, code making is going to require professional judgement in selecting numerical values for the factors involved. Again it appears that this proposal will be helpful. It has been the author's experience that the easiest way to ponder the uncertainty in, say, the conventional professional procedure of translating live load to applied force is to ask oneself, "If I were given the value of the maximum total live load on the floor tributary to a column, what is the value  $\epsilon$  such that in 2/3 of all cases (or with probability 2/3) I would measure the maximum live load induced force within  $1 + \epsilon$  times the value predicted by my procedure (of load idealization, structural analysis, etc.)?" The value of  $\epsilon$  that answers this question is, in important part, an estimate of  $V_{EL}$  and hence gives  $\gamma'_L (= 1 + \beta \alpha^2 V_{EL}$ , Eq. 40), once  $\beta$  is selected.

In summary, the process of code development envisioned requires that the relevant professional committee prepare a report that gives the recommended procedure or formula for obtaining the best prediction of, say, the yield moment of a simple rectangular R.C. beam. In addition, they should report their quantitative assessment of the profession's uncertainty associated with the formula, namely,  $V_p$ . Means and standard deviations of ratios of predicted to observed resistances are commonly calculated by such committees and should serve as a basis for their value of  $V_p$ . In the reinforced concrete example, it may be of the order of 0.1. Still other appropriate committees might study reinforcing bar strength variability and conclude that, say,  $V_M = 0.08$ , while a committee on construction tolerances might estimate (or stipulate?) that  $V_F = 0.03$ , based on measurements or estimates of the depth of the steel in place. (This value may be smaller for deeper beams.) The implication is that  $V_0 = \sqrt{V_F^2 + V_p^2} = \sqrt{0.03^2 + 0.1^2} = 0.10$ . For  $\beta=4$ ,  $\alpha^2=0.5$ , and  $k_R = \beta\alpha^2=2$ , one obtains  $\phi' = 1 - \beta\alpha^2 V_0 = 0.8$ , and  $R' = m_R(1 - k_R V_M) = 0.84 m_R$ . Recall when comparing this with present procedures that the best estimate of the resistance,  $m_R$ , will be significantly greater than present nominal resistances.

The conclusions of parallel special committees on loads and on structural analysis and testing would yield predicted loads, load and structure idealizations, and analysis procedures, plus quantitative estimates or judgements of the measures of uncertainty in these phenomena and in these procedures. A major advantage of the code making process envisioned here over the present procedure (as understood by the author) is that the committees of specialists would have to judge and report on the uncertainties in their domain of interest. Their estimates would be quantitative inputs into a committee charged with selecting load factors and strength reduction factors. The proposed code basis provides an unambiguous means of communication and a formal framework within which this process can work in a rational and consistent manner.

#### References

- (1) Cornell, C.A., "First-Order Uncertainty Analysis with Applications to Structural Reliability," ASCE-EMD Specialty Conference, Purdue University, Lafayette, Indiana, Nov., 1969.
- (2) Hadley, G., Introduction to Probability and Statistical Decision Theory, Holden-Day, Inc., San Francisco, 1967.
- (3) Blake, R.E., "On Predicting Structural Reliability," AIAA Paper No. 66-503, 4th Aerospace Sciences Meeting, Los Angeles, California, June, 1966.
- (4) Cornell, C.A., "Bayesian Statistical Decision Theory and Reliability-Based Design," Proc. of Inter. Conf. on Structural Safety and Reliability of Engineering Structures, Washington, D.C., April, 1969.
- (5) Sfintesco, D., "European Steel Column Research", Conf. Preprint 502, ASCE Str. Engr. Conf., Seattle, Washington, May 8-12, 1967.
- (6) Leclerc, J., "Inventory of the Possible Causes for Variations of the Specified Characteristics of Finished Steel Products," Preliminary Publication, IABSE Symposium, London, September, 1969.
- (7) Mitchell, G.R., "Loadings on Buildings," Preliminary Publication, IABSE Symposium on Concepts of Safety of Structures and Methods of Design, London, September, 1969.
- (8) Rowe, R.E., "Safety Concepts, with Particular Emphasis on Reinforced and Prestressed Concrete," Preliminary Publication, IABSE Symposium, London, September, 1969.
- (9) Benjamin, J.R. and C.A. Cornell, Probability, Statistics and Decision for Civil Engineers, to be published in 1969 by McGraw-Hill, Inc., New York.
- (10) Cornell, C.A., "A Probability-Based Structural Code," presented at 1968 Fall Convention, ACI, Memphis, Tennessee. To be published in the December, 1969, Journal of the ACI.

(11) Lind, N.C., "Deterministic Formats for the Probabilistic Design of Structures," An Introduction to Structural Optimization, M.Z. Cohn, Editor, S. M. Study No. 1, Solid Mechanics Division, Univ. of Waterloo, Waterloo, Canada, 1969.  
(12) Lind, N.C., "Comments on Cornell's Code Format," unpublished memorandum, Univ. of Waterloo, January 18, 1968.

#### SUMMARY

The discussion demonstrates that a variety of practical formats for structural codes, including that of the ACI and CEB, can be developed directly from probability theory. A simplified, first-order probability theory based on first and second moments makes the development feasible. The theoretical basis for a code insures consistency and promotes objectivity in the discussion and specification of safety. All sources of uncertainty are treated uniformly, namely, by axiomatic probability theory, as modern interpretations of the notion of probability permit.

#### RESUME

La discussion précédente démontre qu'il y a une variété de formats, dérivés directement de la théorie des probabilités, qui peuvent être employés en pratique par les normes de calcul, comme celles de l'ACI ou du CEB. Une théorie simplifiée du premier ordre rend cette dérivation possible. En établissant les normes sur une base théorique, on garantit des spécifications consistentes et l'objectivité dans les discussions sur le degré de sécurité. Toutes les sources d'incertitude sont traitées d'une façon uniforme, au moyen des principes de la théorie des probabilités, pour autant que l'interprétation moderne du concept de probabilité le permette.

#### ZUSAMMENFASSUNG

Die Diskussion zeigt, dass eine Vielzahl praktisch angewandter Bauordnungen, unter anderem auch ACI und CEB, direkt aus der Wahrscheinlichkeitstheorie entwickelt werden können. Die Entwicklung wird durch eine vereinfachte Wahrscheinlichkeitstheorie ermöglicht, welche auf den ersten und zweiten Momenten beruht. Diese theoretische Grundlage für eine Bauordnung gewährleistet Folgerichtigkeit und Objektivität bei der Diskussion und Bestimmung der Sicherheit. Alle Unsicherheitsfaktoren werden gleichwertig behandelt, nämlich mittels axiomatischer Wahrscheinlichkeitstheorie, wie es durch die neuere Auslegung des Wahrscheinlichkeitsbegriffes möglich wurde.

Leere Seite  
Blank page  
Page vide

**The probability of failure when the characteristic values are used as a design method**

La probabilité de ruine quand la méthode des valeurs caractéristiques est utilisée

Die Versagenswahrscheinlichkeit, wenn die charakteristischen Werte als Bemessungsmethode verwendet werden

EERO PALOHEIMO

Dr. Ing.  
Helsinki

The only method to determine the dimensions of structures which seems to have a logical justification, would be a form of calculation giving an equal reliability (or equal probability of failure) in different parts of the structure.

Another, and purely practical, requirement for this calculation method is simplicity, as the method should be available for the average engineer in his everyday work.

It seems possible to determine by computers the probability of failure for different types of structures. The question is, can we find a general and relatively simple method of calculation, which gives automatically a given and similar reliability to the different parts of the structure under consideration? If this is not possible, what method would best fulfil the previous conditions?

Four different design methods will be studied in the following, and for simplicity called methods 1,2,3 and 4.

A simple and rather general model of the reliability can be presented as follows:

The condition for failure will be given by

$$(1) \quad g(x_1 \dots x_n) \leq 1$$

where  $x_1 \dots x_n$  represent the various quantities of the structural element or the external forces and moments loading this element.

We assume that the distribution functions of  $x_1 \dots x_n$  are known, and denote the mean-values of these quantities by  $m_1 \dots m_n$

and the standard deviations by  $\sigma_1 \dots \sigma_n$ .

For the probability of failure we have

$$(2) \quad P(g(x_1 \dots x_n) \leq 1)$$

The four different design methods which will be compared are as follows:

Method 1. We choose the mean values of the  $r$  first quantities  $x_1 \dots x_r$  (the internal properties of the structural element) and the  $n-r$  quantities  $x_{r+1} \dots x_n$  (the external forces and moments) so that

$$g(m_1 \dots m_r, k \cdot m_{r+1} \dots k \cdot m_n) = 1$$

We always use the same "total safety factor"  $k$  and try to determine  $k$  so that in some common cases

$$P(g(x_1 \dots x_n) \leq 1) = c$$

where we denote the probability of failure considered as suitable by  $c$ .

Method 2. We choose the mean values of the various quantities so that

$$g(m_1 \dots m_r, k \cdot m_{r+1} \dots k \cdot m_n) = 1$$

and use, depending on the values of  $\varphi_1 = \sigma_1/m_1 \dots \varphi_n = \sigma_n/m_n$  and different functions  $g$ , various "total safety factors"  $k$ , so that in all cases

$$P(g(x_1 \dots x_n) \leq 1) = c$$

Method 3. We choose the various mean values so that

$$g(m_1 \pm \alpha \cdot \sigma_1 \dots m_n \pm \alpha \cdot \sigma_n) = 1 \quad (+ \text{ or } - \text{ chosen unfavourably})$$

We always use the same "characteristic coefficient"  $\alpha$  and try to determine  $\alpha$  so that in some common cases

$$P(g(x_1 \dots x_n) \leq 1) = c$$

Method 4. We choose the mean values so that

$$g(m_1 \pm \alpha \cdot \sigma_1 \dots m_n \pm \alpha \cdot \sigma_n) = 1 \quad (+ \text{ or } - \text{ chosen unfavourably})$$

and use various "characteristic coefficients"  $\alpha$  depending on the values of  $\varphi_1 \dots \varphi_n$  and  $g$ , so that in all cases

$$P(g(x_1 \dots x_n) \leq 1) = c$$

We see immediately that methods 2 and 4 strive for mathematical exactness and methods 1 and 3 aim at simplicity in everyday use.

We shall now study and compare these methods in four different cases.

1. The simplest model of reliability is the case when both the capacity of the structure  $x_1$ , and the external load  $x_2$ , are normal and independent with mean values  $m_1$ ,  $m_2$  and s.d.  $\sigma_1$ ,  $\sigma_2$ .

The probability of failure is then

$$(3) \quad P(x_1/x_2 \leq 1) = P(x_1 - x_2 \leq 0)$$

As we know, the distribution of  $(x_1 - x_2)$  is also normal with

$$(4) \quad \begin{cases} m = m_1 - m_2 \\ \sigma = \sqrt{\sigma_1^2 + \sigma_2^2} \end{cases}$$

and we have

$$(5) \quad P(x_1/x_2 \leq 1) = \Phi\left(\frac{m_2 - m_1}{\sqrt{\sigma_1^2 + \sigma_2^2}}\right)$$

where

$$(6) \quad \Phi(\beta) = \frac{1}{\sqrt{2\pi}} \int_{-\infty}^{\beta} e^{-t^2/2} dt$$

now writing

$$\begin{cases} \sigma_1 = \varphi_1 \cdot m_1 \\ \sigma_2 = \varphi_2 \cdot m_2 \end{cases}$$

$$\text{and } m_1/m_2 = k$$

we get

$$(7) \quad P(x_1/x_2 \leq 1) = \Phi\left(\frac{1 - k}{\sqrt{\varphi_1^2 \cdot k^2 + \varphi_2^2}}\right)$$

which gives the probability of failure when different "total safety factors" are used.

In the same way we get

$$(8) \quad k = \frac{1 + \sqrt{1 - (1 - \varphi_1^2 \cdot \beta^2) \cdot (1 - \varphi_2^2 \cdot \beta^2)}}{1 - \varphi_1^2 \cdot \beta^2}$$

to calculate "the total safety factors" corresponding to

certain  $\Phi(\beta) = c$

Using the "characteristic values" we write

$$(9) \quad \begin{cases} x_1^* = m_1 - \alpha \cdot \beta_1 \\ x_2^* = m_2 + \alpha \cdot \beta_2 \end{cases}$$

Through  $x_1^* = x_2^*$  we get for  $k'$

$$(10) \quad k' = \frac{m_1/m_2}{1 - \alpha \cdot \beta_1} = \frac{1 + \alpha \cdot \beta_2}{1 - \alpha \cdot \beta_1}$$

and  $\beta$

$$(11) \quad \beta = \frac{-\alpha(\beta_1 + \beta_2)}{\sqrt{\beta_1^2 + \beta_2^2}} = \frac{-\alpha(\beta_1 + \beta_2)}{\sqrt{\beta_1^2 + \beta_2^2 + 2 \cdot \alpha^2 \cdot \beta_1^2 \beta_2^2 + 2\alpha\beta_1\beta_2(\beta_1 - \beta_2)}}$$

to define the dependence between  $\alpha$ ,  $\beta$  and  $k'$ . By  $k'$  we denote "the total safety factor", which gives as result the same  $\beta$  as we get using the corresponding  $\alpha$  from (10).

These relations are illustrated in Fig.1 and Fig.2. The equalities (7), (8), (10) and (11) have been solved for some special cases of  $\beta_1$  and  $\beta_2$ , which are usual in practice and the results are given in Table 1.

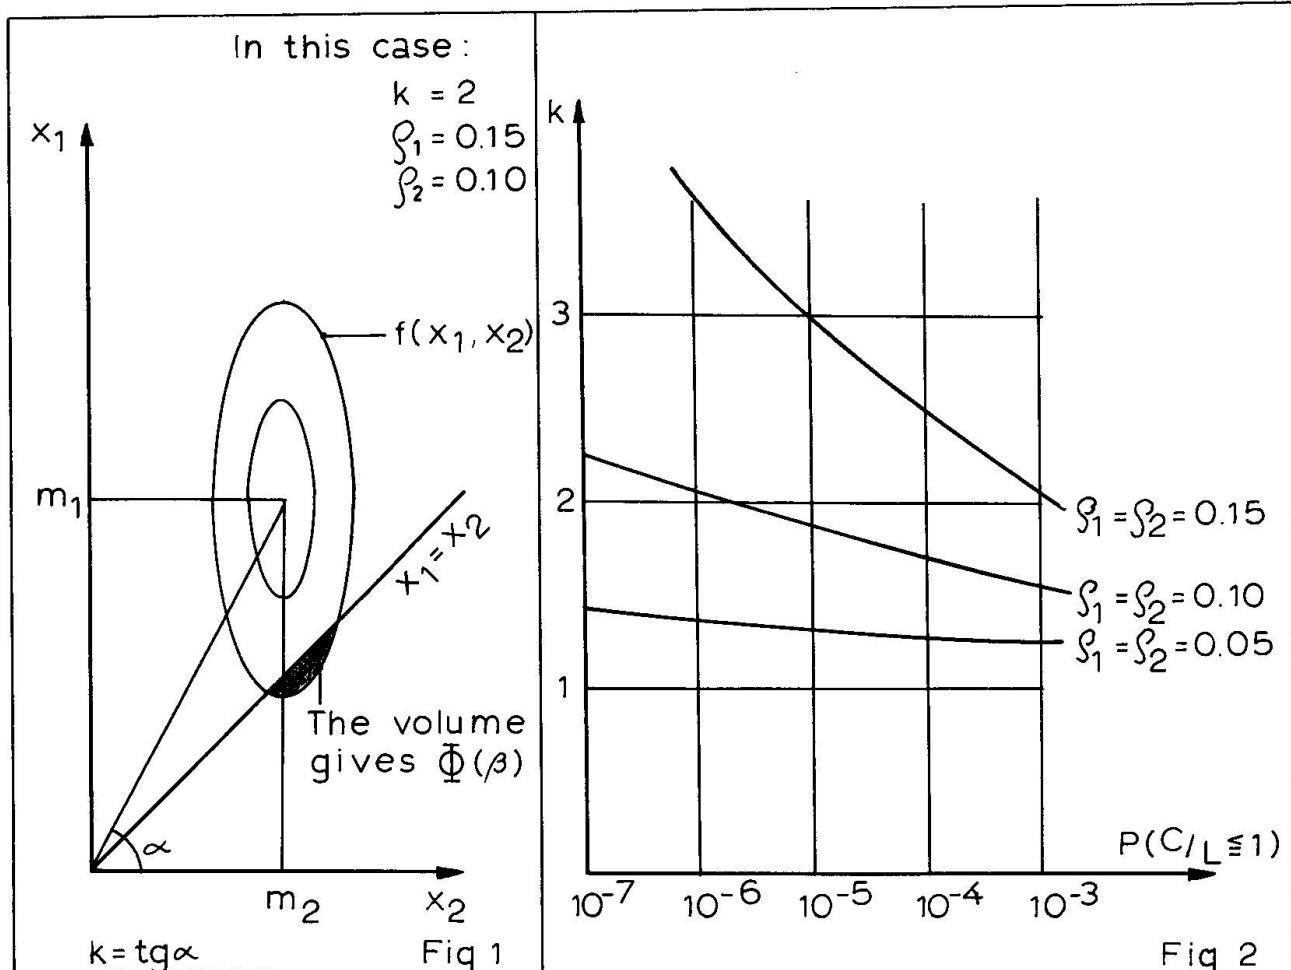


Table 1

	$\delta/m$		$k = 2$		$-\beta = 4,65$	$\alpha = 3,30$				$\alpha = 4,25$	
	$x_1$	$x_2$	$-\beta$	$\Phi(\beta)$		$-\beta$	$\Phi(\beta)$	$k'$	$k/k'$	$k'$	$k/k'$
1	0,05/1	0,05/1	8,95	$10^{-17}$	1,40	4,60		1,40	1,00		
2	0,10/1	0,05/1	4,85		1,92	4,09		1,74	1,10		
3	0,15/1	0,05/1	3,29		3,35	3,75	$10^{-5}$	2,31	1,45	3,35	1,00
4	0,05/1	0,10/1	7,07		1,59	4,65	$10^{-6}$	1,59	1,00		
5	0,10/1	0,10/1	4,47		2,07	4,43		1,99	1,04		
6	0,15/1	0,10/1	3,16		3,46	4,01		2,64	1,31		
7	0,05/1	0,15/1	5,55		1,81	4,53		1,79	1,01		
8	0,10/1	0,15/1	4,00		2,26	4,58		2,23	1,01		
9	0,15/1	0,15/1	2,98	$\sim 10^{-3}$	3,62	4,17		2,96	1,22		

The complete analysis of these results will be given later, but we can now note that

Method 1 with  $k=2$  gives  $-8,95 \leq \beta \leq -2,98$ , which shows that the method is mathematically not justified. ( $10^{-17} < \Phi(\beta) < 0,14 \cdot 10^{-2}$ )

Method 2 with  $c \approx 10^{-6}$ ;  $\beta = 4,65$  gives  $1,40 \leq k \leq 3,62$ . The method is mathematically justified but the definition of  $k$  is too complicated

Method 3 with  $\alpha = 3,3$  gives  $-4,65 \leq \beta \leq -3,75$ , which shows that the method is mathematically more correct than 1, but a little more complicated. ( $0,16 \cdot 10^{-5} < \Phi(\beta) < 0,9 \cdot 10^{-4}$ )

Method 4 with  $c \approx 10^{-6}$ ;  $\beta = 4,65$  gives  $3,3 \leq \alpha \leq 4,25$ . The method is mathematically justified but the definition of  $\alpha$  is too complicated.

2. A more developed model for determining the reliability is when both the capacity of the structural element and the external load are linear functions

$$(12) \quad \left\{ \begin{array}{l} \sum_{i=1}^m a_i \cdot x_i \quad (\text{capacity} = C) \\ \sum_{i=m+1}^n a_i \cdot x_i \quad (\text{load} = L) \end{array} \right.$$

Assuming that  $x_i$  are all independent and normal with  $m_i$  and  $\sigma_i$  we then have the mean and s.d. of  $C - L$

$$(13) \quad m = \sum_{i=1}^m a_i \cdot m_i - \sum_{i=m+1}^n a_i \cdot m_i$$

$$(13) \quad \sigma = \sqrt{\sum_{i=1}^n (a_i \cdot \sigma_i)^2}$$

As the probability of failure we obtain

$$(14) \quad P(C/L \leq 1) = \Phi \left( \frac{\sum_{i=m+1}^n a_i \cdot m_i - \sum_{i=1}^m a_i \cdot m_i}{\sqrt{\sum_{i=1}^n (a_i \cdot \sigma_i)^2}} \right)$$

We assume now that values  $\sigma_i$  are independent of  $m_i$ , and write

$$(15) \quad \begin{cases} \sum_{i=m+1}^n a_i \cdot m_i = \sum_{i=1}^m a_i \cdot m_i' \\ \sigma_i' = \sigma_i \cdot m_i' \end{cases}$$

We then have

$$(16) \quad P(C/L \leq 1) = \Phi \left( \frac{(1-k) \sum_{i=m+1}^n a_i \cdot m_i}{\sqrt{k^2 \cdot \sum_{i=1}^m (a_i \cdot \sigma_i')^2 + \sum_{i=m+1}^n (a_i \cdot \sigma_i)^2}} \right)$$

and

$$(17) \quad k = \frac{1 + \sqrt{1 - (1-c_1/\beta^2)(1-c_2/\beta^2)}}{1 - c_1 \cdot \beta^2}$$

where

$$(18) \quad c_1 = \frac{\sum_{i=1}^m (a_i \cdot \sigma_i)^2}{\left( \sum_{i=m+1}^n a_i \cdot m_i \right)^2} ; \quad c_2 = \frac{\sum_{i=m+1}^n (a_i \cdot \sigma_i)^2}{\left( \sum_{i=1}^m a_i \cdot m_i \right)^2}$$

We can see that equations (16) and (17) correspond to the earlier equations (7) and (8) for that special case of (12) which was treated before.

Using now the "characteristic values" we get

$$(19) \quad k' = \frac{\sum_{i=m+1}^n a_i (m_i + \alpha \cdot \sigma_i)}{\sum_{i=1}^m a_i (m_i' - \alpha \cdot \sigma_i')}$$

and we can calculate the corresponding  $\beta$ -values from (16). Some cases with  $n=3$  and  $m=1$  have been treated, and the results are given in Table 2. The values for  $m_1', \sigma_1', m_2, \sigma_2, m_3, \sigma_3$  have been chosen so that  $x_1$  could represent the capacity of an element, while  $x_2$  and  $x_3$  could represent dead and live load in a practical case. The analysis of this case follows later.

Table 2

	$\phi/m$			$k=2$	$-\beta = 4,65$	$\alpha = 2,80$		$\alpha = 3,60$	
	$x_1$	$x_2$	$x_3$			$-\beta$	$k$	$k'$	$k/k'$
1	0,1 /1,0	0,02/0,4	0,06/0,6	4,77	1,95	1,70	1,15		
2	0,1 /1,0	0,02/0,4	0,09/0,6	4,38	2,04	1,82	1,12		
3	0,1 /1,0	0,02/0,4	0,12/0,6	4,27	2,15	1,93	1,12		
4	0,1 /1,0	0,04/0,8	0,02/0,2	4,88	1,91	1,63	1,17	1,91	1,00
5	0,1 /1,0	0,04/0,8	0,03/0,2	4,85	1,92	1,66	1,16		
6	0,1 /1,0	0,04/0,8	0,04/0,2	4,81	1,94	1,70	1,14		
7	0,05/1,0	0,02/0,4	0,06/0,6	8,45	1,44	1,42	1,02		
8	0,05/1,0	0,02/0,4	0,09/0,6	7,35	1,56	1,52	1,03		
9	0,05/1,0	0,02/0,4	0,12/0,6	6,35	1,69	1,62	1,04		
10	0,05/1,0	0,04/0,8	0,02/0,2	9,15	1,38	1,36	1,02		
11	0,05/1,0	0,04/0,8	0,03/0,2	8,95	1,40	1,39	1,01		
12	0,05/1,0	0,04/0,8	0,04/0,2	8,58	1,42	1,42	1,00		

What has been said earlier of case 1 holds good here. In addition it can be seen that the  $\alpha$ -values giving  $\beta = -4,65$  are considerably smaller than in case 1. In case 1 we had  $3,3 \leq \alpha \leq 4,25$  and here  $2,8 \leq \alpha \leq 3,60$ .

This will be explained. From (16) and (19) we obtain

$$(20) \quad \alpha = -\beta \frac{\sqrt{k'^2 \sum_{i=1}^m (a_i \cdot \phi_i')^2 + \sum_{i=m+1}^n (a_i \cdot \phi_i)^2}}{\sum_{i=1}^m a_i \cdot \phi_i' + \sum_{i=m+1}^n a_i \cdot \phi_i}$$

Replacing the variables we have

$$(21) \quad \alpha = -\beta \frac{\sqrt{\sum_{i=1}^n (u_i)^2}}{\sum_{i=1}^n u_i}$$

At least two conclusions can be made from (21):

- $\alpha$  decreases with increasing  $n$  and constant  $u_i$  values of the same size and increases with  $u_i$  values of variable sizes.

It can also be seen from Fig. 1 and Table 2 that both these conclusions hold good.

Case 2 is the most general case which the author has been able to treat in an exact mathematical form. More complicated cases, such as cases 3 and 4, have been treated approximately by computer.

3. As the third example we shall study the breakage of a rectangular prestressed or reinforced concrete element, when the section is partly cracked and the tension of the reinforcement has reached the yield-limit. The section is loaded with a moment.

The condition of failure is, on the basis of elementary statics:

$$(22) \quad 1 - \frac{S_1g + S_1p}{x_1(x_2 - \frac{x_6 \cdot x_1}{x_4 \cdot x_5 \cdot x_3})} \leq 0$$

where  $S_1$  = the external moment caused by the invariable load.

$S_1g$  = the external moment caused by the extremal value of  $p$  the variable load.

$x_1$  = the tensile-load of the reinforcement, when the tension has reached the yield-limit.

$x_2$  = the distance of the reinforcement from the compressed edge of the element.

$x_3$  = the fullness of the compressed section of the element, (usually called  $s$ ).

$x_4$  = the ultimate compressive strength of the concrete.

$x_5$  = the breadth of the compressed zone.

$x_6$  = the distance of the centre of gravity of the compressed zone from the compressed edge in relation to the height of the compressed zone.

All distributions are assumed to be normal. The means and standard deviations are given in Table 3. The values of  $k$  corresponding to the probability of failure  $10^{-6}$  have been calculated by computer and the values  $k'$  have been found with (23) using  $\alpha = 1,90$ .

$$(23) \quad k' = \frac{\frac{S_1^* + S_1^*}{g + p}}{x_1^* \left( x_2^* - \frac{x_1^* x_3^*}{x_4^* x_5^* x_6^*} \right)} : \frac{\frac{m_{S_1g} + m_{S_1p}}{m_{x_1} (m_{x_2} - \frac{m_{x_1} m_{x_3}}{m_{x_4} m_{x_5} m_{x_6}})}}{m_{x_1} (m_{x_2} - \frac{m_{x_1} m_{x_3}}{m_{x_4} m_{x_5} m_{x_6}})}$$

It can be seen that the greatest  $\alpha$ -value among these cases (giving  $k/k' = 1,0$  in case 10) is 2,20.

The analysis of the results follows later.

4. As the last example we again study a similar reinforced concrete section, but the section is now loaded with a moment and a normal force. We get the condition of failure [9]

$$(24) \quad 1 - \frac{S_1 + S_2(x_2 - c)}{x_2(x_1 + S_2) \left( 1 - \frac{x_6(x_1 + S_2)}{x_2 x_3 x_4 x_5} \right)} \leq 0$$

The loads and forces are dependent in the following ways:

Cases 1 and 2:  $\begin{cases} S_{1g} = 0,5 \text{ g} \\ S_{2g} = 1,0 S_{1g} \end{cases} \quad \begin{cases} S_{1p} = 0,08 p_2 + 0,12 p_3 \\ S_{2p} = 0,10 p_1 + 0,20 p_2 \end{cases}$

Cases 3 and 4:  $\begin{cases} S_{1g} = 0,2 \text{ g} \\ S_{2g} = 1,5 S_{1g} \end{cases} \quad \begin{cases} S_{1p} = 0,20 p_1 + 0,30 p_2 \\ S_{2p} = 0,40 p_1 + 0,10 p_2 \end{cases}$

$g$  = the invariable load

$p_1, p_2, p_3$  = different independent variable loads

$x_1, x_2, x_3, x_4, x_5, x_6$  = as in example 3.

All distributions are assumed to be normal. The number  $N$ , which gives the relation between the life time of the construction and the interval used to define the d.f. of the variable loads, is here 10. The means and s.d.: s are given in Table 4. The values of  $k$  and  $k'$  corresponding to  $\alpha = 1,8$  have been calculated as before.

Table 3

Quantity \ Case	$S_{1g}$	$S_{1p}$	$x_1$	$x_2$	$x_3$	$x_4$
1	0,025/0,5	0,1/1,0	0,02/1,0	0,1/5,0	0,08/1,0	0,15/1,0
2	0,05/1,0	0,1/1,0	0,02/1,0	0,1/5,0	0,08/1,0	0,15/1,0
3	0,25/5,0	0,1/1,0	0,02/1,0	0,1/5,0	0,08/1,0	0,15/1,0
4	0,025/0,5	0,2/1,0	0,05/1,0	0,25/5,0	0,08/1,0	0,15/1,0
5	0,05/1,0	0,2/1,0	0,05/1,0	0,25/5,0	0,08/1,0	0,15/1,0
6	0,25/5,0	0,2/1,0	0,05/1,0	0,25/5,0	0,08/1,0	0,15/1,0
7	0,025/0,5	0,1/1,0	0,02/1,0	0,4/20,0	0,08/1,0	0,15/1,0
8	0,05/1,0	0,1/1,0	0,02/1,0	0,4/20,0	0,08/1,0	0,15/1,0
9	0,25/5,0	0,1/1,0	0,02/1,0	0,4/20,0	0,08/1,0	0,15/1,0
10	0,025/0,5	0,2/1,0	0,05/1,0	1,0/20,0	0,08/1,0	0,15/1,0
11	0,05/1,0	0,2/1,0	0,05/1,0	1,0/20,0	0,08/1,0	0,15/1,0
12	0,25/5,0	0,2/1,0	0,05/1,0	1,0/20,0	0,08/1,0	0,15/1,0

Quantity \ Case	$x_5$	$x_6$	$k$ ( $10^{-6}$ )	$k'$ $\alpha = 1,90$	$k/k'$
1	0,0/1,0	0,08/1,0	1,76	1,61	1,09
2	0,0/1,0	0,08/1,0	1,75	1,59	1,10
3	0,0/1,0	0,08/1,0	1,70	1,55	1,10
4	0,0/1,0	0,08/1,0	2,18	2,02	1,08
5	0,0/1,0	0,08/1,0	2,09	1,95	1,07
6	0,0/1,0	0,08/1,0	1,92	1,80	1,05
7	0,0/1,0	0,08/1,0	1,38	1,32	1,05
8	0,0/1,0	0,08/1,0	1,32	1,30	1,02
9	0,0/1,0	0,08/1,0	1,27	1,27	1,00
10	0,0/1,0	0,08/1,0	1,90	1,57	1,21
11	0,0/1,0	0,08/1,0	1,76	1,51	1,17
12	0,0/1,0	0,08/1,0	1,56	1,40	1,11

Analysis of the results.

From the preceding examples we can see that it is possible to define the total safety factors, which correspond to some probability of failure, here  $\sim 10^{-6}$ . We have

also seen that even in the simplest cases this definition is rather complicated and leads to a number of different values. Method 1

Table 4

Quantity Case	g	p <sub>1</sub>	p <sub>2</sub>	p <sub>3</sub>	x <sub>1</sub>	x <sub>2</sub>
1	0,05/1,0	0,10/1,0	0,10/1,0	0,10/1,0	0,05/1,0	0,05/1,0
2	0,05/1,0	0,10/1,0	0,10/1,0	0,10/1,0	0,02/1,0	0,02/1,0
3	0,05/1,0	0,10/1,0	0,10/1,0		0,05/1,0	0,05/1,0
4	0,05/1,0	0,10/1,0	0,10/1,0		0,02/1,0	0,02/1,0

Quantity Case	x <sub>3</sub>	x <sub>4</sub>	x <sub>5</sub>	x <sub>6</sub>	k	k' <sub><math>\alpha=1.80</math></sub>	k/k'
1	0,08/1,0	0,50/5,0	0,00/1,0	0,04/0,55	1,39	1,41	0,99
2	0,08/1,0	1,5/10	0,00/1,0	0,04/0,55	1,40	1,22	1,15
3	0,08/1,0	0,50/5,0	0,00/1,0	0,04/0,55	1,55	1,45	1,07
4	0,08/1,0	1,5/10	0,00/1,0	0,04/0,55	1,47	1,24	1,18

seems to have no mathematical justification and Method 2 seems to be much too complicated for practical purposes.

We are now going to compare methods 3 and 4. From (21) it can be seen that, assuming the various  $u_i$  values to be equal, we get for  $-\beta = 4,65$  the relation in Table 5 between  $\alpha$  and  $n$ . The relation holds good with the conditions given in example 2. If the  $u_i$ -values are not equal, the  $\alpha$ -value tries to increase.

Table 5

n	1	2	3	4	5	6	7	8
$\alpha$	4,65	3,29	2,69	2,33	2,08	1,90	1,76	1,65

Tables 3 and 4 show that method 3 gives quite satisfactory results even when the conditions of example 2 do not hold good. However, we can see that with increasing  $n$  we get smaller  $\alpha$ -values, and also that with very different standard deviations for some essential quantities, the  $\alpha$ -values corresponding to  $\beta = -4,65$  begin to increase.

It does not seem mathematically justified, to use always the same  $\alpha$ -values, independent of the structure and other circumstances. It is also impossible to define the  $\alpha$ -values separately for all cases.

A compromiss between methods 3 and 4 could perhaps lead to results satisfying the conditions given at the beginning of this paper. Using a computer we could find different  $\alpha$ -values for different types of structures, corresponding to e.g.,

- a timber column with normal force
- a prestressed rectangular beam with moment
- a steel column with normal force and moment.

The  $\alpha$  -values should be given in standards, and would form a basis for the design of structures. The standard deviations of different factors should also be given in the standards.

Literature:

- 1 Basler, E. Untersuchungen über den Sicherheitsbegriff von Bauwerken, Diss. ETH Zürich, Nr. 2035, Solothurn 1960
- 2 Blaut, H. Über den Zusammenhang zwischen Qualität und Sicherheit im Betonbau, München, 1961
- 3 Bredsdorff, P & Poulsen, E. Om principper ved og krav til dimensioneringsmetoder for bærende konstruktioner, Saertryk af Danmarks Ingeniørakademi 1967.
- 4 Cramér, H. Mathematical methods of statistics, Uppsala 1945
- 5 F.I.P.-C.E.B. Empfehlungen zur Berechnung und Ausführung von Spannbetonbauwerken, Deutscher Beton-verein E.V. 1966
- 6 Freudenthal, A.M. Étude critique des critères de sécurité Huitième Congrès, New York 1968
- 7 Lloyd, K. & Lipow, M. Reliability: Management, Methods, and Mathematics, USA 1962
- 8 Paloheimo, E. Om Konstruktioners säkerhet, Nordisk Betong 1966/4
- 9 Poulsen, E. Jernbetontvaersnits Baereevne, Danmarks Ingeniør-akademis publicationer 1967
- 10 Rüsch, H. Die Sicherheitstheorie. Deutscher Beton-Verein-Arbeitstagung 1959

## SUMMARY

Four different design methods are compared, two based on the use of a "total safety factor" and two on the use of "characteristic values". Four examples are treated and it is seen that in these cases the method using "characteristic values" is more reasonable than the other. Some conclusions on the way of determining the characteristic values have also been made.

## RESUME

Quatre méthodes d'étude différentes sont comparées, deux méthodes se basent sur l'emploi d'un "facteur total de sécurité" et les deux autres sur l'emploi des "valeurs caractéristiques". Quatre exemples sont traités et l'on y voit que dans ces cas la méthode qui emploie les "valeurs caractéristiques" est plus raisonnable que l'autre. On a tiré aussi quelques conclusions de la façon déterminée des valeurs caractéristiques.

## ZUSAMMENFASSUNG

Vier verschiedene Bemessungsmethoden sind verglichen worden, zwei von ihnen gründen sich auf die Verwendung von einem "totalen Sicherheitsfaktor" und zwei auf die Verwendung von "charakteristischen Werten". Vier Beispiele sind behandelt worden und als Ergebnis hat man festgestellt, dass die Methode mit den "charakteristischen Werten" in diesen Fällen zweckmässiger als die anderen sind. Auch einige Schlussfolgerungen über die Art dieser Werte sind gemacht worden.

**Artificial Equation Errors**

Erreurs d'équations artificielles

Künstliche Gleichungsfehler

MILÍK TICHÝ

Building Research Institute  
Technical University  
Prague, CzechoslovakiaDefinition of the equation error

In structural analysis and design various prediction formulas are used to describe behaviour of structures, structural elements and sections under different conditions. In most cases, these formulas do not exactly predict the response of the structure, so that the resulting quantities,  $y^*$ , deviate less or more from the assumed reality,  $y$ , even if exact values or input quantities,  $g_i$ , are introduced into the formulas. These deviations are called equation errors; they can be defined either as the differences

$$\Delta = y^* - y$$

or the ratios

$$\lambda = \frac{y^*}{y} .$$

The second definition will be kept in the following text.

Character of the equation errors

Essentially, the equation errors can have two distinctly different characters.

First of all, the equation errors can be caused by unsufficient knowledge of the predicted phenomenon. In most formulas only a certain part of primary quantities influencing the phenomenon (say,  $g_1$  through  $g_k$ ) is involved, whereas the remaining quantities ( $g_{k+1}$  through  $g_m$ ) are not considered for various rea-

sons. Sometimes even their effect is not known at all.

It is evident that neglecting of only one influence would make the equation error systematical. However, the number of influences and, thus, of primary quantities which are not considered in the formula is frequently large. Due to this fact and due also to the complexity of phenomena the equation errors acquire random character and, consequently, can be treated by statistical methods.

The equation errors of this type are a necessary but unintentional consequence of our limited possibilities of predicting the phenomena. Therefore, they can be considered as natural.

On the other hand, however, the mathematical model of the phenomena is well known in many cases, but the resulting formulas are too complex. The practical designers often demand their simplification in order to facilitate the design procedures. If, then, an approximate formula giving  $y^*$  is found it must always lead to an equation error,  $\lambda$ . It is clear, that this equation error is an intentional, though unwanted consequence of the approximation, and it can be considered as artificial.

Natural equation errors have been already discussed by some authors (Zsutty /1/, Tichý-Vorlíček /2/, Murzewski /3/). Therefore, no special attention will be paid to them in this contribution which, on the other hand, will concentrate on a particular type of the artificial equation error, resulting from simplification of prediction formulas.

### Problem formulation

Assume that a function

$$y = f(g_1, g_2, \dots, g_m) \quad (1)$$

is perfectly defined in the given range, i.e. its magnitude is known for any set of primary quantities  $g_1$  through  $g_m$ .

Evidently, function (1) can be replaced by different functions, e.g. by polynomials, Fourier series, etc. However, if a simplification of the original function (1) is desired, the choice of substitutes is rather limited. It appears that for practical purposes an important simplification can be achieved by substituting for (1) the following exponential function

$$y^* = g_1^{x_1} \cdot g_2^{x_2} \cdot g_3^{x_3} \cdots g_m^{x_m} \quad (2)$$

where  $x_1$  through  $x_m$  are constant exponents which are to be found for each separate function and for each set of ranges of primary quantities  $g_i$ . By taking the logarithm of Eq. (2) it follows that

$$\log y^* = x_1 \log g_1 + x_2 \log g_2 + \cdots + x_m \log g_m \quad (3)$$

It is clear that the computation of the investigated quantity is reduced to the summing of logarithms of primary quantities and taking the antilogarithm of the sum. This reduction has a considerable importance by itself, since in most cases the number of mathematical operations involved will be limited to a few. Thus the errors due possibly to the imprecision of the computation itself are to a large extent eliminated and, what is probably often more important, a source of human errors (e.g. the omission of some operation) is lessened. The establishing of exponents  $x_i$  is, as it will be shown, in general simple, even if some practical problems must be solved.

Function (2) has already been successfully used by Zsutty /1/ for multiple regression analysis of ultimate strength tests of reinforced concrete sections. The intention of his work was to fit a function to populations of experimental results and to values of primary quantities applying in the ultimate strength which were ascertained in the tests. Equation errors resulting from this are of the natural type.

#### Method of Solution

The problem of finding the unknown exponents  $x_i$  can be solved by using the least squares method for logarithms of  $y$  and  $y^*$ . The sum of squares of differences between  $\log y$  and  $\log y^*$  should be minimum, i.e. symbolically.

$$\sum_{j=1}^M (\log y_j^* - \log y_j)^2 = \text{minimum} \quad (4)$$

where  $M$  is the number of points for which the difference is found.

Considering the decimal logarithms, it is convenient to put

$$g_1 = 10.0 \quad (5)$$

thus the first factor of the right-hand side of Eq.(2) will be a constant.

Substitute for  $y^*$  from Eq. (2) into Eq. (4).

$$\sum_{j=1}^M (x_1 \log g_{1j} + x_2 \log g_{2j} + \dots + x_n \log g_{nj} - \log y_j)^2 = \min$$

and differentiate successively by unknowns  $x_i$ . In order to minimize the left-hand side of the Eq. (4) the first derivative must be put equal to zero. Hence

$$\begin{aligned} \sum_{j=1}^M (x_1 \log g_{1j} + x_2 \log g_{2j} + \dots \\ + x_n \log g_{nj} - \log y_j) \log g_{ij} = 0 \end{aligned}$$

for all  $i = 1, 2, \dots, n$ .

After rearrangement and taking into account Eq. (5) a system of  $n+1$  simultaneous linear equations is obtained:

$$a_{11} x_1 + a_{12} x_2 + \dots + a_{1n} x_n = b_1$$

$$a_{21} x_1 + a_{22} x_2 + \dots + a_{2n} x_n = b_2$$

---

$$a_{n1} x_1 + a_{n2} x_2 + \dots + a_{nn} x_n = b_n$$

where

$$a_{ik} = \sum_{j=1}^M \log g_{ij} \cdot \log g_{kj}$$

$$b_i = \sum_{j=1}^M \log g_{ij} \cdot \log y_j$$

It is clear that this system can be easily solved for the unknowns  $x_i$ .

If the least squares method is used for substituting a set of experimentally obtained values  $y_j$  by a function depending on parameters  $g_i$ , the magnitudes of  $y_j$ 's and  $g_i$ 's are known from the tests; they form a discrete population of points. This is schematically shown for  $y$  depending on one parameter only,  $g_2$  in Fig.1. However, if applying the method to the substitution of

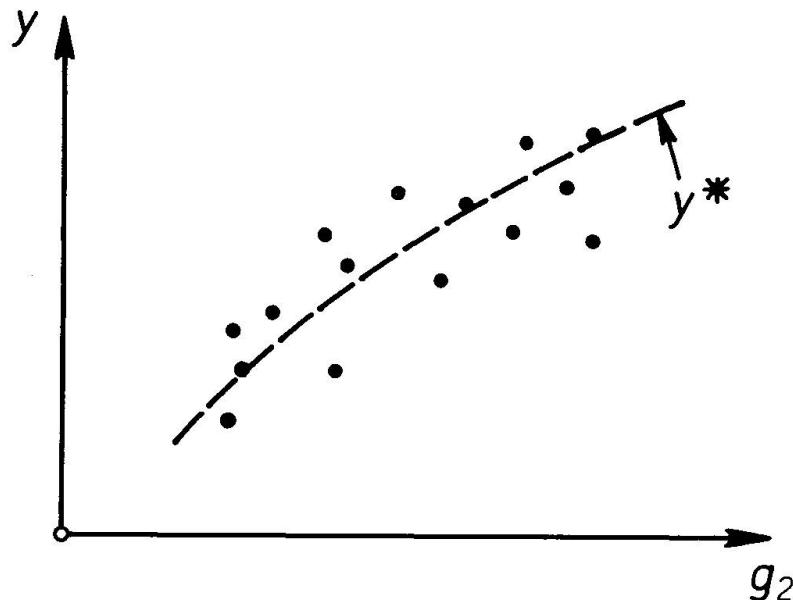


Fig. 1. - Substitute function derived from experimental results.

a defined continuous function, values of  $y_j$  and  $g_i$  must be artificially generated (Fig.2). The larger will be the number of generated points,  $M$ , the better will be the fit.

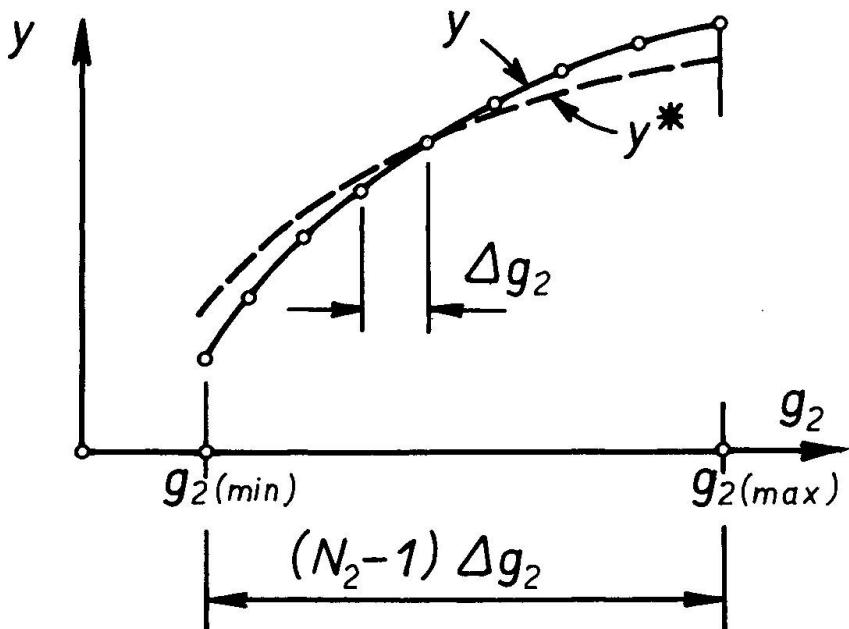


Fig. 2. - Substitute function derived from another defined function.

To generate the population of points, intervals for individual primary quantities  $g_i$  must be defined by lower and upper bound values,  $g_i^{(min)}$  and  $g_i^{(max)}$ , respectively. These intervals are divided into  $(N_i - 1)$  divisions, the width of which is  $\Delta g_i$ . Thus, the number of points generated in this way will be given by the product

$$M = \prod_{i=1}^n N_i$$

Accepting Eq. (5), no interval is defined for  $g_1$ , so that  $N_1 = 1$ . For all primary quantities the number of divisions may either be equal or it might differ, taking into account the influence of the quantity on the result.

#### Quasi-randomness of the equation error

It appears from some tentative tests that the distribution of the quantity

$$\lambda = \frac{y^*}{y} \quad (6)$$

has a surprisingly random character, even if the number of points,  $M$ , is relatively small (of the order of 100). This seems to be rather illogical since both functions,  $y$  and  $y^*$ , are

deterministically given. No explanation of the quasi-random behaviour of  $\lambda$  can be given today. And it cannot be generalised, neither.

The quasi-randomness of the equation error  $\lambda$  suggests the use of the statistical parameters of its distribution as quantities suitable for checking the effectiveness of the substitute function. These parameters should evidently be: the mean  $\bar{\lambda}$ , the standard deviation  $S_\lambda$ , and also the coefficient of skewness,  $a_\lambda$ , defined by

$$a_\lambda = \frac{\mu_3^c}{S_\lambda^3}$$

where  $\mu_3^c$  is the third central moment of the statistical distribution of  $\lambda$ . Further statistical parameters are not considered, the above three being quite sufficient for the purpose.

The mean,  $\bar{\lambda}$ , should be near to unity. Actually, this has proven to be true in all cases investigated to date (for examples of practical application of the method see the author's papers /4/ and /5/). The mean is not greatly influenced by the number of generated points,  $M$ .

The standard deviation,  $S_\lambda$ , supplies the information on the spread of  $\lambda$  about the mean. It can be stated, that the less the  $S_\lambda$ , the better the fit. In general, the value of  $S_\lambda$  decreases with the number of points,  $M$ ; the contribution of individual primary quantities not being uniform, a further decrease of  $S_\lambda$  may be achieved by concentrating the increase in  $M$  to some of the quantities only. Since a perfect fit is never possible, the standard deviation converges to some definite value.

A similar importance is attached to the coefficient of skewness,  $a_\lambda$ . In general its value differs from zero, towards negative or positive values. In practical cases values of  $\lambda$  either at the left-hand or at the right-hand tail of the statistical distribution are important, depending upon the nature of the problem. It cannot be said that a value of  $a_\lambda$  near to zero would be the most convenient one - a definite skewness may be often more favourable than a zero skewness.

If computing the statistical parameters of the population

of values  $\lambda$  obtained for those  $M$  generated points which were used in deriving the unknown exponents  $x_i$ , incorrect conclusions might be drawn. Evidently, in this way the quality of the fit is checked just by those points from which  $x_i$ 's has been established. Therefore, it is necessary to check the fit also for points which are removed as far as possible from the  $M$  points of the original population. Such points lie just between the original ones (for one-dimensional function this is schematically shown in Fig.3). A new, control population of values  $y$  and  $y^*$  is generated for the control system of points and

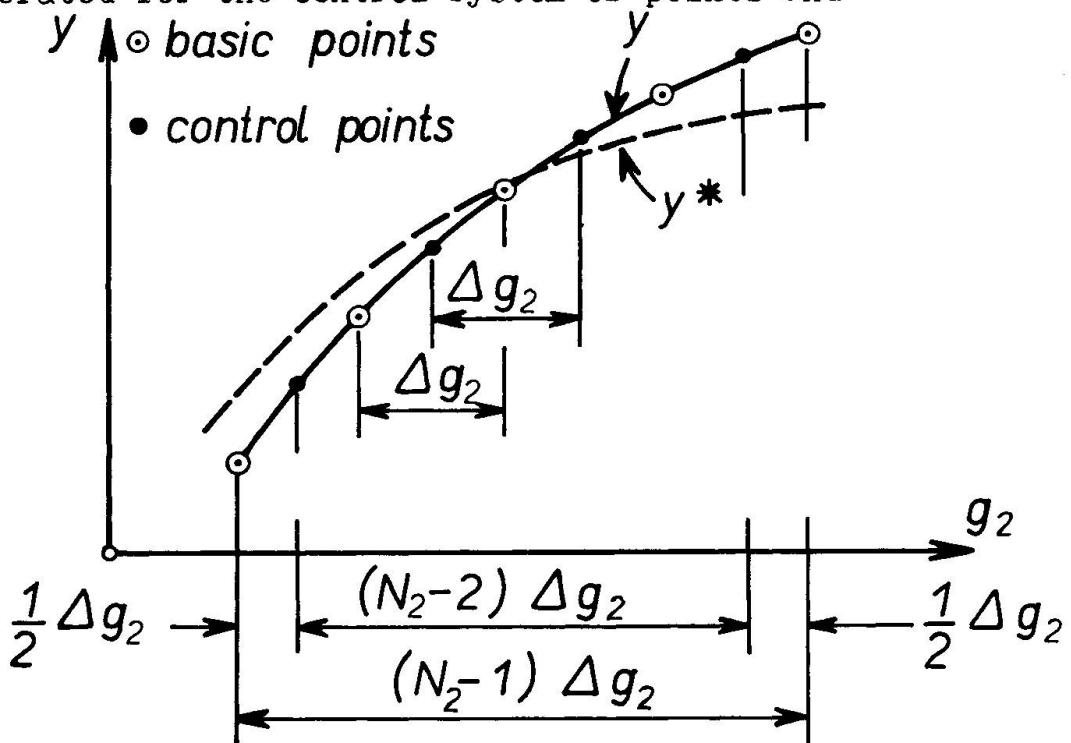


Fig. 3. - Basic and control system of values  $(y, g_2)$  for function  $y$  depending on one primary quantity.

again the statistical parameters of the equation error,  $\lambda$ , are found. It is obvious that the number of points of the control population will be smaller than  $M$ , being equal to

$$m = \prod_{i=1}^m (N_i - 1)$$

For the assessment of the new set of statistical parameters the same is valid as for the original population.

### Partial safety factor

Modern structural code formats as introduced by the European Concrete Committee, CEB, International Building Council, CIB, and others use to cover the approximations of design assumptions the partial safety factor  $\gamma_a$  belonging to a wider family of factors  $\gamma$ . This factor is frequently introduced only in conceptual terms, or sometimes, directly by means of an empirical value; yet, no method of establishing  $\gamma_a$  has been so far presented.

Now, using the above quasi-randomness of the equation error,  $\lambda$ , the partial safety factor  $\gamma_a$  can be defined. The procedure is outlined as follows: Computing the value of  $\gamma^*$  for a given set of  $g_i$ 's it is known that in comparison with the exact value of  $\gamma$  the result is charged by equation error  $\lambda$ . However, the magnitude of  $\lambda$  is not known. On the other hand it is known that the quasi-randomness of  $\lambda$  is described by the statistical parameters established for the whole population of points investigated. Assuming now a convenient statistical distribution for the description of the random behaviour of  $\lambda$  (Fig. 4) the adequate quantile, either  $\lambda_{min}$  or  $\lambda_{max}$ , can be found for a chosen probability  $P(\lambda < \lambda_{min})$  or  $P(\lambda > \lambda_{max})$ .

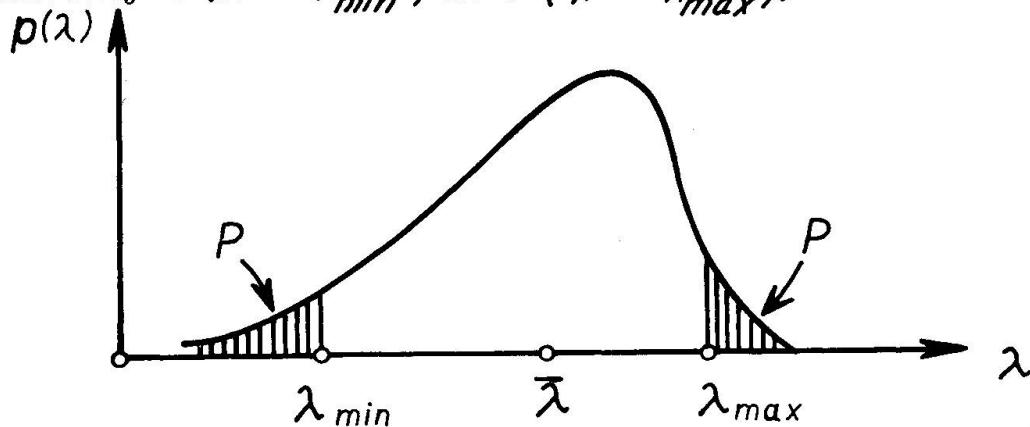


Fig. 4. - Probability density curve of the statistical distribution of  $\lambda$ .

The values of the quantiles are given by

$$\lambda_{min} = \bar{\lambda} + t_{min} s_{\lambda} \quad (7)$$

$$\lambda_{max} = \bar{\lambda} + t_{max} s_{\lambda} \quad (8)$$

where  $t_{min}$  (with negative sign) or  $t_{max}$  are values of standardized random variable (with zero mean and unit variance) depending on the type of the selected distribution and its statistical parameters, and on the probability  $P(\lambda < \lambda_{min})$  or  $P(\lambda > \lambda_{max})$ , respectively.

At the present state of knowledge it is not possible to say in general which type of statistical distribution should be used. In the cases investigated until now (see /4/ and /5/) log-normal distribution proved to be adequate for modelling the quasi-randomness of  $\lambda$  (it must be mentioned here that the log-normal distribution can have both positive or negative skewness; this fact is not commonly known). In other cases, of course, other types of statistical distribution might be applied. It is evident that the optimum type would depend upon the type of the substitute function  $y^*$ .

Similarly, no definite answer, based on some theoretical analysis can be given with regard to the probability  $P(\lambda < \lambda_{min})$ ,  $P(\lambda > \lambda_{max})$ . The problem must be solved within the whole context of statistical design. However, it may be tentatively said that a reasonable value of  $P$  would be  $10^{-2}$  for cases of minor importance (e.g. checking the stiffness of a current beam) and about  $10^{-3}$  in more important cases (ultimate strength, etc.). It must be stressed here that the probability  $P$  has nothing to do with the probability of failure  $P_f$ , since it represents entirely different statistical phenomenon. The use of the method is not restricted to a probabilistic code format only, it can be used also with the classical codes.

Assume, now, for instance, a quantity  $y$  the over-estimate of which in comparison with its real value is on the unsafe side in the design (e.g. the ultimate moment of a section). After finding the substitute value  $y^*$  it is obviously not known if its deviation from  $y$  is at the left or right-hand tail of the distribution of  $\lambda$ . To be on the conservative side the worst must be anticipated and, therefore,  $\lambda_{max}$  must be considered in the design, i.e. in order to obtain the design value  $y^d$ ,  $y^*$  must be divided by  $\lambda_{max}$ , i.e.:

$$y^d = \frac{1}{\lambda_{max}} \cdot y^*$$

The same procedure is used for cases where negative deviations are unsafe:

$$y^d = \frac{1}{\lambda_{\min}} \cdot y^*$$

Consequently, the partial safety factor  $\gamma_a$  covering the equation error is defined as

$$\gamma_a = \frac{1}{\lambda_{\max}} \quad (9)$$

or

$$\gamma_a = \frac{1}{\lambda_{\min}} \quad (10)$$

It is clear that for cases where  $\lambda_{\min}$  is to be used negative skewness of the distribution will be more favourable than a positive one; the opposite is true for  $\lambda_{\max}$ .

The use of the factor  $\gamma_a$  can be seen from the following example:

The condition of safety of a reinforced concrete section for the limit state of failure is e.g.

$$1.5M_D + 1.8M_L \leq \phi M_U \quad (11)$$

where  $M_D$ ,  $M_L$  are moments produced in the section by dead load and live load respectively,  $M_U$  is the ultimate moment of the section calculated by means of an exact formula and  $\phi$  is the capacity reduction factor covering the random behaviour of the materials, dimensions etc. (actually,  $\phi$  is again a partial safety factor).

Using now a substitute formula for the ultimate moment, value  $M_U^*$  is calculated and the condition of safety (11) must be changed to

$$1.5M_D + 1.8M_L \leq \gamma_a \phi M_U^*$$

where evidently in this case  $\gamma_a$  is defined by  $1/\lambda_{\max}$ , i.e.  $\gamma_a < 1$ , since higher design ultimate moment,  $M_U^d$ , would give an unsafe result. For further examples see again /4/ and /5/.

Acknowledgements

The present paper has been prepared in the highly creative atmosphere of the University of Waterloo, Waterloo, Canada, during the author's visiting appointment. Thanks are extended to the University for the availability of its excellent computing facilities, particularly of the IBM System 360 Model 75.

- - o o - -

References

1. - Zsutty, T. : Error statistics for reinforced concrete.  
Proceedings of ASCE, Journal of Structural Division, 1963/3 ST6.
2. - Tichý, M. - Vorlíček, M.: Statistical Theory of Concrete Structures (a book to be published in English by ACADEMIA, Prague, Czechoslovakia).
3. - Murzewski, J. - Sowa, A.: Assessment of error in computing load-carrying capacity of reinforced concrete member (in Polish). Archivum inżynierii lądowej, 1969/1-2.
4. - Tichý, M.: Simplification of design formulas. Acta Technica ČSAV (Prague), 1969/4.
5. Tichý M.: Approximate computation of the sectional stiffness of reinforced concrete beams (in Czech). Stavebníčky časopis, 1969/10.

## SUMMARY

When known deterministic formulas are approximated by more simple formulas artificial equation errors are encountered. The deviation between the results obtained by both formulas can be mathematically treated. It has been found in some cases that the behaviour of the artificial equation error is quasi-random, so that it can be described by a suitable statistical distribution. This fact has a significance for the practical design, since partial safety factors can be mathematically derived.

## RESUME

Si des formules déterministiques connues sont approximées par des formules simplificatives, les erreurs d'équation artificielles entrent dans le calcul. Les dérivations entre les résultats donnés par les deux formules (originale et simplifiée) peuvent être traitées mathématiquement.

Il a été trouvé en quelques cas étudiés que l'erreur d'équation artificielle est quasi-aléatoire et qu'on le peut décrire par une distribution statistique convenable. Ce fait a une importance pour le calcul pratique: le coefficient partiel de sécurité de calcul approximatif peut être dérivé par des méthodes mathématiques.

## ZUSAMMENFASSUNG

Wenn man genaue durch vereinfachte Funktionen darstellt, entsteht ein künstlich geschaffener Gleichungsfehler (wie er in der klassischen linearen Regressionsrechnung als im Quadrat zu minimierende Abweichung auftritt). Die Abweichung der durch die beiden Funktionen entstehenden Ergebnisse kann berechnet werden. Der künstliche Gleichungsfehler verhält sich sozusagen zufällig, so dass er durch eine Dichtefunktion dargestellt werden kann. Dieser Umstand hat einen für die Praxis unübersehbaren Vorteil, sinternal Teilsicherheitsbewerte mathematisch hergeleitet werden können.

Leere Seite  
Blank page  
Page vide

## A Logical System for Partial Safety Factors

Un système logique de coefficients partiels de sécurité

Ein logisches System für Teilsicherheitsfaktoren

MILÍK TICHÝ  
Building Research Institute  
Technical University  
Prague, Czechoslovakia

It is now generally accepted that a system of partial safety factors proves to be practical in structural design. These factors cover a wide spectrum of various influences which are due to the properties of loads or to the properties of structures. The character of the influences is very heterogeneous and thus the methods of establishing the values of partial safety factors are still discussed and not yet settled in general. In spite of this fact systems of partial safety factors were recently proposed by several international organizations, particularly by the European Concrete Committee, CEB /1/, International Building Council, CIB /2/, and International Standard Organization, ISO /3/.

However, all these systems have some of the following drawbacks:

- a) they are not universal, i.e. they are often developed from the point of view of a particular type of structures;
- b) they do not strictly separate factors according to the individual influences (e.g. factors attributed to loads and load-effects depend upon the material properties, methods of construction, etc.);
- c) they are not flexible enough to enable continuous developments of design codes;
- d) factors are distributed unevenly, i.e. some influences are stressed too much, others are disregarded at all.

Table 1. The Proposed System of Partial Safety Factors.

Origin of the influence	Character of the influence				
	Random	Simultane- ous occur- ence of random events	Exactness of analysis, basic assumptions, etc.	Mode of occurrence of un- favourable events	Non - random
Structure	$\gamma_{S1}$	$\gamma_{S2}$	$\gamma_{S3}$	$\gamma_{S4}$	$\gamma_{S5}$
Load	$\gamma_{L1}$	$\gamma_{L2}$	$\gamma_{L3}$	$\gamma_{L4}$	$\gamma_{L5}$

The above drawbacks cause difficulties in communication among different national and international organizations preparing design codes. To avoid this, a system can be developed, with a two-way classification of partial safety factors: according to the origin of influences they should cover (loads, structures), and, secondly, according to the character of the influences (random, non-random, etc.). The proposed system is shown in Table 1, where each factor must be considered as a symbol for a group of factors covering influences of the same origin and character. A more detailed explanation of factors in Table 1 will clear the idea:

Factors  $\gamma_{S1}$  cover random behaviour of separate:

- material properties (strength, moduli of elasticity, etc.),
- dimensions,
- artificial stress states (prestressing force),

or, integrally, random behaviour of the structural resistances (ultimate load, cracking load), or other important quantities (width of cracks, deflection, etc.).

The main aim of factors  $\gamma_{S1}$  is to ensure a low probability of occurrence of unfavourable events.

Similarly, factors  $\gamma_{L1}$  express random behaviour of separate loads, or load-effects.

Factors  $\gamma_{S2}$  take into account low probability of simultaneous occurrence of two or more unfavourable random events, e.g. occurrence of minimum strength of concrete and steel, minimum ultimate bending moments in a statically indeterminate structure, etc.

Factors  $\gamma_{L2}$  have the analogous meaning for loads.

Factors  $\gamma_{S3}$  and  $\gamma_{L3}$  cover

- intentional or unintentional approximations accepted in the analysis, simplifications of hypotheses, etc.,
- uncertainties in basic assumptions.

Factors  $\gamma_{S4}$  take into account the mode of occurrence of unfavourable events in the structure (e.g. brittle fracture).

Factors  $\gamma_{L4}$  cover unfavourable modes of load action: impact, repeated loads, etc.

Factors  $\gamma_{S5}$  and  $\gamma_{L5}$  should cover all deviations from some average behaviour which cannot be treated statistically at the present time, e.g. corrosion, emergency loads.

Factors  $\gamma_{S6}$  and  $\gamma_{L6}$  take into account consequences of structural failure (in a wider sense of word). If the damages concern the structure (its serviceability and durability) factors  $\gamma_{S6}$  would apply, whereas  $\gamma_{L6}$  would be used if objects carried or protected by the structure are endangered (goods, people). Since the border between the two domains of application may be arbitrary in many cases, both groups of factors,  $\gamma_{S6}$  and  $\gamma_{L6}$ , might be unified into one.

The proposed system of partial safety factors can be used for any type of structures, structural materials and loads. The quantitative meaning of particular factors may be different in separate but the qualitative meaning will not change.

#### References

1. - Recommandations pratiques unifiées pour le calcul et l'exécution des ouvrages en béton armé. CEB, Paris 1963.
2. - Thomas, F.G.: Basic parameters and terminology in the consideration of structural safety. CIB Bulletin, 1964, pp.4-12.
3. - Principes généraux pour assurer la sécurité des ouvrages. Troisième Avant - Projet de Recommandation ISO/TC98/SC2, June 1968.

## SUMMARY

In order to enable the communication between different national and international bodies working in the domain of design standardization, as well as between designers on the whole, a simple universal system of partial safety factors is proposed and discussed. The system is based on a two-way classification of origins and characters of influences occurring in the structural design.

## RESUME

Pour simplifier la communication entre les différentes organisations nationales et internationales dans le domaine du calcul des constructions et aussi entre les ingénieurs de projets eux-mêmes, un système universel de coefficients partiels de sécurité est proposé. Le système est basé sur une classification bi-dimensionnelle.

## ZUSAMMENFASSUNG

Um die Verständigung zwischen verschiedenen nationalen und internationalen Organisationen auf dem Gebiete der Bemessung der Baukonstruktionen zu verbessern, ist ein einfaches allgemeines System der Teilsicherheitsfaktoren entworfen worden. Das System nutzt eine zweidimensionale Klassifizierung der Einflüsse auf die Sicherheit aus.

Leere Seite  
Blank page  
Page vide

## DISCUSSION LIBRE / FREIE DISKUSSION / FREE DISCUSSION

## Zur Anwendung von Sicherheitsbeiwerten in der Baupraxis

K. KORDINA  
Braunschweig

Mit Hilfe der Wahrscheinlichkeitstheorie gelingt es, die Bedeutung der einzelnen Unsicherheitsfaktoren aufzuzeigen und ihren Einfluß auf das Bauwerk anzugeben. Allerdings können die Ergebnisse der Wahrscheinlichkeitstheorie für Aufgaben der praktischen Bemessung im allgemeinen nicht unmittelbar Anwendung finden; aus diesem Grund werden z.Zt. vereinfachte, sogenannte semi-probabilistische Systeme angewendet; sie werden vielfach in Form einer symbolischen Gleichung der nachstehenden Form angeschrieben:

$$v_s [\alpha \cdot D + \beta \cdot L] \leq \frac{U}{v_m} \quad (1)$$

Hierin bedeuten

$v_s$	Unsicherheitsbeiwert der Lasten
$v_m$	Unsicherheitsbeiwert der Baustoffgüten
D	Ständige Last
L	Verkehrslast
U	Traglast des Querschnitts
$\alpha$ und $\beta$	Faktoren, mit welchen die Unsicherheiten der Größen D bzw. L erfaßt werden.

Gleichung (1) ist jedoch im allgemeinen schon zu umständlich, um bei der praktischen Bemessung Anwendung zu finden. Mein Ziel ist, Möglichkeiten und Grenzen einer Vereinfachung anzudeuten:

- 1) Die Größen D und L beinhalten üblicherweise zusammengesetzte Beanspruchungen, beispielsweise Biegemomente (M) und gleichzeitig wirkende Längskräfte (N). Eine Bemessung ist dann zweifach durchzuführen: einmal mit der größeren Längskraft und dem kleineren Moment und vice versa. Hierbei ist zusätzlich zu bedenken, daß die Unsicherheit in der Höhe der Längskraft in Einzelfällen nicht gleich groß jener des gleichzeitig wirkenden Biegemoments sein muß, was eine Vereinfachung erschwert, aber auch auf verborgene Gefahren hinweist. Es scheint mir eine der wichtigsten Aufgaben der Statistik zu sein anzugeben, in welchen Fällen die Annahme gleicher Unsicherheiten für M und N nicht vertretbar ist.

Abgesehen von diesen Überlegungen ist eine Vereinfachung des Ausdrucks innerhalb der Klammer in Gl.(1) anzustreben, wofür sich die Annahme  $\alpha = \beta$  anbietet. Leider machen bislang nur wenige Vorschriften von dieser Möglichkeit Gebrauch; der USA-Code und der UdSSR-Code legen  $\alpha \neq \beta$  fest, wobei zusätzlich noch verschiedene Kombinationen von  $\alpha \cdot D$  und  $\beta \cdot L$  zu berechnen sind.

Die wissenschaftliche Bearbeitung des Sicherheitsproblems sollte bevorzugt prüfen, ob die Annahme  $\alpha = \beta$  gerechtfertigt ist.

2) Eine weitere Vereinfachung von Gleichung (1) ergibt sich dadurch, daß der Teilsicherheitsbeiwert  $v_M$  von der rechten auf die linke Gleichungsseite gebracht wird, so daß Gleichung (1) neu geschrieben werden kann in der folgenden Form:

$$v [ \alpha \cdot D + \beta \cdot L ] \leq U \quad (2)$$

Hier wird ein Gesamtsicherheitsbeiwert  $v = v_s \cdot v_M$  benutzt. Diese Vereinfachung scheint brauchbar zu sein bei Bauteilen, deren Verformungen die äußeren Schnittgrößen nicht beeinflussen, deren ungünstigste Beanspruchung aus einer gleichzeitigen und gleichmäßigen Erhöhung aller Schnittgrößen ( $M$ ,  $N$ ,  $Q$ ) hervorgeht und schließlich dort, wo eine Änderung der Festigkeit keine unproportionale Änderung innerhalb der gegebenen Schnittgrößenkombination hervorruft. [1]. Es ist klar, daß auch bei Tragwerken, bei welchen die Verformungen die äußeren Schnittgrößen nicht beeinflussen – also z.B. bei Biegebalken – die beiden letztgenannten Forderungen nicht immer eingehalten sind. Trotzdem wird man von dieser Vereinfachung gern Gebrauch machen. Sobald aber Tragwerksverformungen in Rechnung zu stellen sind (Theorie II. Ordnung), würde es sowohl der Sicherheitstheorie als auch dem Streben nach Wirtschaftlichkeit widersprechen, zur Vereinfachung einen Gesamtsicherheitsbeiwert zu verwenden.

Wird dieser Gedankengang auf schlanke Stützen angewendet, so ist Gleichung (1) in folgender, modifizierter Form anzuschreiben:

$$v_s [ N_{(D+L)} ; M_{(D+L)} + \Delta M_{(D+L; v_M)} ] \leq \frac{U}{v_M} \cdot \quad (1a)$$

Werden Teilsicherheitsbeiwerte beibehalten, wird das Zusatzmoment infolge der Stabverformungen  $\Delta M$  nur durch den Beiwert  $v_s$  vergrößert, was vom Standpunkt der Wahrscheinlichkeitstheorie

aus richtig ist. Ein Gesamtsicherheitsbeiwert hingegen würde zu einer nicht gerechtfertigten Vergrößerung dieses Zusatzmomentes führen.

Um diesen Einfluß deutlich zu machen, wird das Ergebnis einer Zahlenrechnung gezeigt:

Es wurde  $v_s = v_M = \sqrt{v}$  gesetzt und die Traglasten einerseits unter Anwendung eines Gesamtsicherheitsbeiwertes nach Gl.(2) andererseits mit Teilsicherheitsbeiwerten nach Gl. (1a) ermittelt. Das Verfahren nach Gl. (1a) erbrachte um 20-25 % höhere zulässige Lasten.

Hier war somit eine Vereinfachung nach Gleichung (2) aus Gründen der Wirtschaftlichkeit nicht zu vertreten. Die neue deutsche Stahlbeton-Vorschrift wird im übrigen von der Teilung des Sicherheitsbeiwertes bei der Bemessung schlanker Stützen Gebrauch machen.

3) Mit der besseren Durchdringung des Verhaltens unserer Bauwerke steigt die Genauigkeit der Spannungsermittlung. Beispielsweise war es vor 20 Jahren keineswegs üblich, bei gewöhnlichen Hochbauten vom Einfluß der Zwangsschnittgrößen oder vom Kriechen und Schwinden zu sprechen und diese Einflüsse in die Rechnung einzuführen. Heute, unter Anwendung der Computertechnik, werden auch kleine Nebeneinflüsse erfaßt. Dies sollte durch eine Herabsetzung des Sicherheitsbeiwertes  $v_s$  berücksichtigt werden; dies scheint mir im Sinne der Wahrscheinlichkeitstheorie zulässig zu sein.

Aufgabe der Wahrscheinlichkeitstheorie ist es nach m.E. nicht nur, die theoretischen Zusammenhänge mit den Ergebnissen der Statistik aufzuzeigen, sondern auch den wirklichen Gegebenheiten besser angepaßte Teilsicherheitsbeiwerte zu ermitteln.

## Literatur

[1] Kordina, K.:

Zur Anwendung der Sicherheits-theorie bei Stabilitätsunter-suchungen im Stahlbetonbau  
("Aus Theorie und Praxis des Stahl-betonbaus", W. Ernst & Sohn, Berlin/München)

## A Design Method and Limit States for Pedestrian Steel Overpasses

YUKIO MAEDA

Dr.-Eng.

Professor of Civil Engineering  
Osaka University  
Osaka, Japan

Since the loading conditions for pedestrian steel overpasses is relatively simple and clear, the load-factor approach could be applied, which is practically simple and adequate for providing a safety concept and introducing probability into the design in a rational form.

On the other hand, the design criteria for main structures will be the limit of structural usefulness. If stocky sections are used for structural members, their plastic strength combined with stability limit may be the limit of usefulness, taking account of deflection and stress limits at the normal service loads or at the time of earthquake.

Here, design examples and their some results will be shown. The load factors for three different load combinations adopted at the Standard Rules for Plastic Design in Steel, Japan Welding Engineering Society, 1967, are as follows: (1)  $U = 1.2 D + 2.1 L$  or  $1.4 (D + L)$ , (2)  $U = 1.2 D + 1.7 L + 1.7 W$ , (3)  $U = D + L + 1.5 E$ , where  $U$  is ultimate strength,  $D$  is dead load,  $L$  is live load,  $W$  is wind load or snow load, and  $E$  is earthquake force or collision load. These values of the load factor were determined by a semi-probabilistic method.

Fig. 1 illustrate typical three types of pedestrian steel overpasses in Japan, and classifications of the types result in 44 different design cases, by span length which is 17.5 m or 22.0 m, by floor slab which is either reinforced concrete slab or steel deck, and by section of main structural members which is welded built-up or H-shaped rolled, and either uniform or non-uniform.

In proportioning the structural members for each case, the simple plastic theory was applied to the mechanism collapse as shown in Fig. 2. Also, secondary effects such as shear force, axial force, bucklings were considered, and the design of each case was done automatically by a computer. Particularly, in order to get a minimum weight of the members, the linearized relations between full-plastic moment and weight were applied to the calculation. Furthermore, an alternating collapse and an incremental collapse, and stress and deflection limits at the normal service load or at the time of earthquake, were investigated.

One example of the results is indicated in Table 1, which is for C Type, Portal Rigid Frames with variable sections of the members. The table shows that an increase of plastic moment due to the incremental collapse is about 10% for symmetrical form and 7% for anti-symmetrical one, and that an effect due to alternating plasticity can be neglected, but the design criteria is governed by the specified working stress at the normal service loads. If the live load is larger, the deflection may be the governing limit state.

Throughout the overall results, it is shown that the design criteria are the plastic strength due to mechanism collapse, or the incremental collapse, or the working stress or deflection which is to be specified at a rule or code, and that a priority among them depends upon the ratio of live load to total load, and upon the spanratio of the frame. If the values of load factors are changed, there will be different results of design criteria.

Finally, it may be said that load factors and limit states should be combined more rationally and in detail.

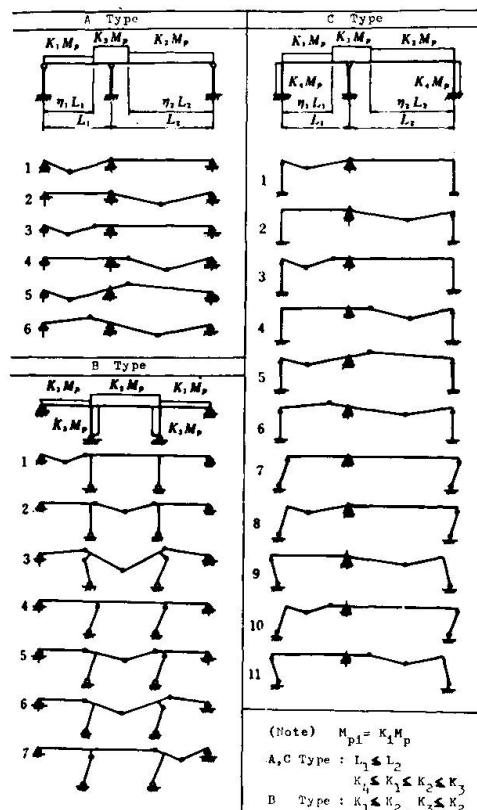
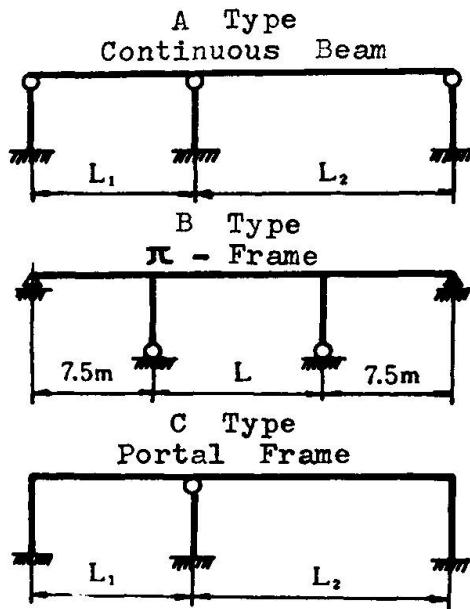


Fig. 1

Fig. 2

Table 1

		C Type(variable section)							
Item		Case		CVB 1	CVB 2	CVB 3	CVB 4	CVB 5	CVB 6
Load		D	L	330	330	330	500	500	500
		FL	75	75	75	75	75	75	75
Location of variable section		0.9	0.8	0.8	0.8	0.9	0.8	0.8	0.9
Initial $M_p$ ratio	$K_1$	$K_1$	1.0	1.0	1.0	1.0	1.0	1.0	1.0
	$K_2$	$K_2$	1.4	0.3	2.2	2.0	0.3	1.6	0.4
Final $M_p$ ratio	$K_1$	$K_1$	1.0	1.0	1.0	1.0	1.0	1.0	1.0
	$K_2$	$K_2$	1.0	0.37	1.0	0.24	1.22	0.24	1.24
$\delta M_p$	(t-m)		21.77	35.82	33.80	23.61	42.55	32.32	
$\delta M_p$	(t-m)		24.50	38.53	38.42	26.06	45.09	35.32	
$\delta M_p/M_p$			1.13	1.07	1.13	1.10	1.05	1.09	
$\delta M_p$	(t-m)		10.87	14.56	18.02	10.27	15.20	14.41	
$\delta M_p/M_p$			0.50	0.41	0.53	0.44	0.36	0.45	
Section	section 1 (I-shaped)		200 x 12 376 x 8	200 x 12 536 x 8	200 x 12 536 x 8	200 x 12 376 x 8	200 x 12 576 x 8	200 x 12 476 x 8	
	section 2 (I-shaped)		200 x 12 376 x 8	200 x 8 536 x 8	200 x 12 536 x 8	200 x 12 376 x 8	200 x 12 576 x 8	200 x 12 476 x 8	
	section 3 (I-shaped)		200 x 12 376 x 8	200 x 8 536 x 8	200 x 16 518 x 8	200 x 16 388 x 8	200 x 12 576 x 8	200 x 16 452 x 8	
	section 4 (box shaped)		200 x 8 184 x 8	200 x 8 184 x 8	200 x 8 184 x 8	200 x 9 232 x 8	200 x 9 232 x 8	200 x 16 318 x 9	
Floor beam spacing (m)		1.50	1.40	1.40	1.50	1.40	1.40	1.40	
Working stress (kg/cm <sup>2</sup> )									
at section 1		1135	725	1234	1262	734	1451		
at section 2		1135	1338	1234	1262	1443	1451		
at section 3		1813	1665	1727	1650	1871	1815		
at section 4		1979	2153	3246	2160	2374	1501		
Deflection	E/L	1/400	1/355	1/415	1/449	1/538	1/443		
Column t=9.5		609.6 <sup>a</sup>	609.6 <sup>a</sup>	609.6 <sup>a</sup>	609.6 <sup>a</sup>	609.6 <sup>a</sup>	609.6 <sup>a</sup>		

(Note) \* stress at earthquake

**Discussion libre / Freie Diskussion / Free Discussion**

**CATERINA MANUZIO**  
Italie

En me référant à quelques conclusions du Dr. Tichy je voudrais exprimer une opinion un peu plus optimiste sur les possibilités d'utilisation des statistiques.

Le fait que nous ne connaissons pas avec certitude les valeurs réelles de charge et de résistance est exactement la raison pour laquelle nous avons recours aux méthodes statistiques; ces dernières nous permettent en effet de définir les quantités en question d'une façon correcte, tandis que leur définition en termes déterministes ne nous donne pas le moyen de maîtriser dans les calculs l'extension de nos incertitudes et le marge de risque qui en résulte.

Un moins bon degré de connaissance de la charge ou de la résistance se réfléchit dans un plus large intervalle de dispersion des distributions de probabilité correspondantes, ce qui nous amène à des coefficients de sécurité relativement hauts pour un certain degré fixé de sécurité.

Mais lorsque le développement de nos recherches et de nos connaissances nous permet de connaître plus exactement les quantités considérées, cela se traduit automatiquement dans une réduction de leurs intervalles de dispersion et dans la possibilité d'adopter des coefficients de sécurité plus réduits, c'est à dire dans une possibilité d'économie sur le prix des constructions, établie sur une base absolument rationnelle.

Je suis d'accord avec le Dr. Tichy qu'on ne peut pas penser, au moins à présent, d'introduire les méthodes statistiques dans la pratique courante de projet, car les calculateurs ne sont pas préparés à ce fin.

Toutefois la statistique peut être utilement employée non dans la phase du travail de projet mais dans la préparation de règles de calcul qui puissent permettre au projeteur travaillant par les méthodes classiques de connaître le degré de sécurité qui correspond à tel ou tel valeur des coefficients de sécurité.

Je voudrais me rapporter encore à l'"Essai de Guide pour le projet des pylônes de lignes aériennes" dont j'ai déjà parlé pour donner un exemple sur ce point.

Pour projeter les pylônes selon le "Guide" le projeteur doit connaître d'abord quelques informations sur les vitesses de vent dans la région. Des Tableaux déjà préparés permettent de déduire des ces vitesses la valeur qui doit être introduite dans le calcul, à travers une estimation de la distribution de probabilité correspondante; on obtiendra ainsi la valeur de base de la charge de vent. Cette charge sera multipliée ensuite par un coefficient de sécurité donné dans le Guide en fonction du degré de sécurité qu'on désire obtenir pour les pylônes et du niveau de qualité qu'on prévoit pour leur construction. A ce fin on a distingué dans le Guide trois niveaux différents de qualité de construction, auxquels on a fait correspondre respectivement les dispersions de résistance de 5%, 7,5% et 10% de la valeur nominale.

Le principe par lequel on a choisi les valeurs de dispersion susdites de 5%; 7,5%; 10% est assez intéressante puisqu'il s'agit justement d'une application pratique des concepts probabilistes.

Il était évidemment impossible de conduire les essais nécessaires sur un nombre suffisant de pylônes réels. On a fait alors des séries d'essais sur des parties de pylônes (telles que par exemple des consoles), ce qui était bien moins coûteux et on a déterminé la dispersion des résistances de ces parties. Ensuite, sur la base du principe qu'une chaîne d'éléments en série a une dispersion inférieure à un élément simple, on a adopté pour les pylônes les valeurs trouvées pour leurs parties, en se tenant ainsi du côté de la sécurité.

L'application des principes probabilistes nous a été donc extrêmement utile car elle nous a permis de donner aux projeteurs un moyen pour leur permettre d'évaluer la sécurité des structures qu'ils calculent, tout en ne leur demandant aucune préparation particulière dans le domaine des statistiques.

**Free Discussion / Discussion libre / Freie Diskussion**

**B.E. WEINBERG**  
U.S.A.

1. As a practicing engineer, I must unfortunately disagree with a comment made by Professor Ruesch. I do not see how the concepts of structural safety and negligence can be separated, or negligence even be eliminated from any consideration of structural safety.

2. A number of speakers such as Professor Ruesch, Mr. Leclerc and Dr. Abeles spelled out at lengths the many variables affecting structural safety. I fear greatly that their studies and research will have been in vain until these results can be impressed upon designing engineers and construction personnel. The great task facing the engineering profession is to put these concepts into workable format for the designer and the constructor. If the developments presented in these papers result in more complicated design formulas and procedures, I fear that they will find little acceptance among designing engineers, at least in the United States, even though they may result in more economical construction. Both steel and concrete design formulas have become more complicated in the United States of America in recent years. Neither the available engineering manpower nor design fees have kept pace with this growth. Therefore, I feel that much of the work represented by the fine papers presented at this Symposium will not bear fruit until they have been transformed into reasonably simple design formulas and procedures.

**Comments by the author of the introductory report**  
**Remarques de l'auteur du rapport introductif**  
**Bemerkungen des Verfassers des Einführungsberichtes**

**A.R. FLINT**  
Great Britain

This theme concerns design methods taking into account random variations in load and resistance. All methods do this. None make direct use of reliability theory.

Among designers there are few, if any, who could inform their clients of the risks of collapse or unserviceability of the structures which they have designed. While most will agree with Dr. Rowe's concise statement of the aims in design, we are all conscious of the serious shortcomings in our training and experience which prevent us using a probabilistic approach in the every-day process of synthesis of structural designs. This process entails selection from alternative systems and materials, commonly based on assessment of performance using codified rules and estimates of capital cost alone.

The design 'strengths' are frequently derived from limited test experience without quantified account of variability and with safety margins handed down through the generations and subject to commercial pressures. Previous, negative, 'experience' of lack of failures is frequently quoted as reason for paring down load factors. Loadings are too often assumed to be deterministic and of known magnitude.

Before considering ways in which design procedures may be developed to achieve the aim of uniform lower level of reliability in service of a given class of structure, let us take note of the major impediments to progress in this direction. The first of these concerns the acceptance of the fact that all structures are at risk during their lives. Despite experience of failures of all forms of structure it has yet to be overtly recognised by the design profession, by controlling authorities, and by the law that we currently design with a probability of collapse or unserviceability. The opening remarks by Professor Stussi at this Symposium show this to be the case. Acceptance of a quantified probability would confuse the seat of responsibility and liability, would loosen the constraints on lack of diligence, and would be considered an unbearable imposition by most clients.

A second serious handicap is the lack of statistical information regarding loads and resistance. Moreover, when the likely combinations of loads and the variation of risk with the location of the material are considered the available data are sparser still. Certain imponderables such as errors in calculation, communication and workmanship, must also be catered for in the design. These errors may be compounded; a poor designer probably also being lax in direction of the works. In many instances the future usage of the structure cannot be precisely predicted.

For most structures in civil engineering there is risk to life if collapse occurs. Furthermore, there are few instances in which an owner purchases a statistical sample of a given design. (An exception to this is the transmission line support structure). Both these factors mitigate against the acceptance of a variation in risk with economic consequence of failure. There is also no obvious incentive to abandon current procedures. Although the intellectual elegance and tidiness of the statistical approaches have been propounded, there has been a notable lack of evidence presented to prove that they produce overall economy. Moreover, there is no pressure resulting from failures that causes the designer to grasp at a new philosophy.

Analysis of the causes of a number of structural mishaps suggests that in most cases the deficiencies in our present procedures lie largely in our assumptions concerning the loading conditions to be sustained, rather than in our treatment of load-and resistance-variability. Gross mistakes are far more frequently the cause of collapse than choice of the wrong value for load factor in a formal calculation. It is the calculations that have been omitted that need attention.

Despite these adverse factors, there remains scope for the gradual development of more rational design methods. As a first step it is necessary to review the orders of risk inherent in structures in service. It has been shown that widely varying margins of safety exist in practice. For example, investigations into the margins against the attainment of the relevant limit states for several highway bridges has shown global load factors ranging from 0.7 to 16.<sup>(2)</sup>

Provided that no adverse experience exists to show that the highest of the probabilities of failure are unacceptable there are at once grounds for rationalising load factors, using statistical reasoning as a basis. Progress in this direction - in defining characteristic strengths of materials - has been referred to in the earlier reports.

To compare probable performance of different designs for similar purposes, mathematical models of statistical variation of loads and of resistance are needed. For basic materials Gaussian or logarithmic

normal distributions have been found to reasonably represent the variation in strength (crushing or yield), although these may be distorted as a result of commercial practices and truncated owing to control procedures. Indeed, the whole position of the control of quality compatible with statistical design needs to be resolved.

The sensitivity of the value of estimated risk to the form of distribution has been well illustrated by Professor Ang, who has suggested a procedure which will reduce the dependence of our estimates on the assumption of variability.

There are grounds for assuming similar distributions for simple stable elements such as beams. The distributions of strength of components subject to instability and fatigue are less clearly known, and there is need for study of test evidence to provide a basis for these. There is also need for a commonly accepted definition of the basis for interpretation of the results of tests on elements, possibly defining characteristic strength on a statistical basis, and separating determinable influences from the random.

The variability of wind loadings may currently be treated by assuming extremal distributions of wind speeds, although the accuracy of the basis of translation of the appropriate speed into load demands extensive field observations. The proposed new British Code of Practice on loading specifies wind speeds that may be expected with different probabilities of occurrence, information that may not be intelligently used by a designer in the absence of instruction as to his target risk and in the absence of reliable data concerning the statistics of structural response. This premature introduction of the concept of probability confuses rather than assists. Interdependence between resistance and load exists for wind loaded structures which further complicates the mathematical treatment, calling for step by step or iterative procedures. We are currently using statistical methods for the treatment of wind as composed of random gusts and thus producing dynamic response.

Suitable distributions for treating other types of loading remain to be defined, although it is probable that extremal distributions will generally be found appropriate. These model forms of distribution also require a knowledge of the variance of the relevant parameters. In treating strength a coefficient of variation of between 0.05 and 0.15 may be expected - dependent upon degree of control and accuracy of analytical method. Rather higher variance may be expected for loads.

Although reference has here been made primarily to the probability of collapse, similar analysis may be undertaken of the risk of attainment of the other limit states significant for the class of structure being considered. These limit conditions have frequently been ill-

defined in the past, designers making certain assumptions regarding the acceptable magnitudes of deflections, crack widths, and vibrations under certain arbitrary loadings. There have been inadequate records of service histories and seldom have shortcomings been scientifically observed and documented for future reference for designers. It is the joint responsibility of the designer and the user to establish both performance requirements and design life.

The serviceability limit states, if attained, imply economic consequences. There are grounds here for leaving the selection of load factor (and implied probability) to the user and his designer, particularly where it is found that the capital cost is governed by the need to maintain serviceability. The risk, assessed by use of statistical models similar to those referred to earlier, may be adjusted to suit the seriousness of the damage incurred by exceeding the limit condition.

To simplify and reduce the cost of design it is desirable to restrict the number of limit states to be considered for a given structure. It should not be obligatory for designers to check security against limit states known from experience not to be critical. It is probable that for certain types of structure safety against collapse will be inherently provided by design against unserviceability.

The use of statistical loading-and strength-data in deriving characteristic values for limit state designs has been described in earlier reports. Although the probabilistic concept has been further heeded by the various national committees concerned with the principles of structural safety, none has recommended its direct application.

It is noteworthy that at this Symposium while each of the papers related to Theme VI are of considerable value in improving the understanding of the principles underlying the probabilistic approach to design, they all suffer from the total absence of evidence on which the proposals may be used in a quantitative way. Their immediate application lies in ensuring that directives are formulated in a way permitting the use of statistical data when available, and in drawing attention of designers to the qualitative effect of governing influences.

For practical design use there would appear the necessity to codify procedures to produce the desired security. There is immediate scope for use of the mathematical models of the kind referred to earlier in deriving load factors leading to uniform safety for similar structures. Their application will also yield a basis for varying load factors when different risks are acceptable and economical. In addition to the use of probability theory as a comparative tool it has

been apparent that theoretical studies are of considerable value in directing codification to a form that attaches safety margins to the correct parameters and then balances their relative values to produce acceptable reliability. It is to be hoped that there will be greater freedom for designers to exercise their skill to provide the greatest economy with reasonable public safety. This freedom is not necessarily incompatible with the controls enforced by the law, although it may complicate administration.

The influence on safety of the analytical method adopted must also be carefully considered in design. Standard bases for verification are now being considered in this country, and it is to be expected that variation of load factor with accuracy of analysis will result. There may thus emerge an incentive to designers to use improved analytical tools.

Tichý in his first paper has criticised the deficiencies of the system of partial safety factors proposed by various international committees. He has put forward a new system which is claimed to be more rational and flexible for future development, both of merit.

The factors which he proposed are all separately allowed for in the interim report of the C.I.R.I.A. Study Committee on Safety and to a large extent his basis seems likely to be adopted in this country. In practice some of the partial factors may be lumped together to reduce the work of the designer.

Although a simplified 'load factor' procedure is currently being adopted in limit state design, there is need to consider whether this is capable of producing designs of consistent performance. The paper by Paloheimo discusses four mathematical approaches using statistical models representing load - and resistance - characteristics. In this he shows, albeit using assumed distributions, that equal reliability can be better achieved by designing by use of characteristic factors on the deviations of the parameters, rather than by adopting overall load factors. His preferred method demands prior knowledge of the variance of load and strength, but this must in any case be assumed in assessing appropriate load factors. It may indeed be found that simple rules may be based on the more reliable procedures.

The difficulties associated with the assessment of the combined effects of errors in calculation, workmanship and communication have been mentioned earlier. The papers by Cornell and Tichý are concerned with the statistical treatment of these. Cornell, by means of second-moment reliability treatment, shows, encouragingly, that these effects need not necessarily be of governing significance, and that it may be adequate as a design process to lump them together in a definition of characteristic resistance. He provides a basis which may be of great

help to drafting committees in arriving at suitable factors for use in design. Tichý treats errors in calculation to define response as of random nature. On this premise he shows that a partial safety factor on strength may be determined to cover the effects of such error, provided that a rational model can be prescribed which simulates the statistical variation of accuracy.

The limit state approach to design has been accepted in Britain in the drafting of the new unified concrete Code of Practice and that for bridges, and the interim report of the C.I.R.I.A. Committee on Structural Safety has set out guide lines for use by drafting committees. A recent publication of the Institution of Structural Engineers on the Aims of Design has drawn attention to the risk of failure which must always be present. There is also a rational reaction to the hastily prepared directives following the collapse last year of part of a block of flats due to a gas explosion. The valuable contribution by Mr. Rodin has illustrated how simplified statistics may aid the designer in rationally treating such an occurrence. The climate of opinion is therefore warming to overt acceptance of safety concepts of the kind discussed at these meetings.

It remains for designers to be provided with the data needed to rationalise their methods of selection. We need statistics of structural resistance, of extreme loads and their combinations. We need analysis of the risks inherent with currently used design procedures. We need field records of performance leading to improved limit conditions. The absence of such data should not delay the development of a framework of design directives permitting the use of improved information as it becomes available, while remaining practical enough for application to real life with its infinity of load combinations and high redundancy in structural systems.

#### References

1. R.E. Rowe. Safety Concepts. I.A.S.S. 1969. Symposium.. Theme I.
2. L.S. Edwards. 'Failure conditions for highway bridges'. M.Sc. Report. University of London. 1967.
3. Draft British Standard Code of Practice for Loading: Wind Loads. December 1968.
4. A.M. Freudenthal. Theories of Elasticity, Plasticity and Viscosity. I.A.B.S.E. 8th Congress. September 1968.
5. Draft British Standard Code of Practice for the Structural Use of Concrete. 1969.
6. C.I.R.I.A. Technical Note 2. Guidance for the Drafting of Codes of Practice for Structural Safety. August 1968.
7. Institution of Structural Engineers. Aims of Structural Design. August 1969.