

Zeitschrift: IABSE reports of the working commissions = Rapports des commissions de travail AIPC = IVBH Berichte der Arbeitskommissionen

Band: 11 (1971)

Artikel: Limit design of aluminium shear webs

Autor: Clark, J.W. / Sharp, M.L.

DOI: <https://doi.org/10.5169/seals-12057>

Nutzungsbedingungen

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

Conditions d'utilisation

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

Terms of use

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

Download PDF: 31.01.2026

ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>

Limit Design of Aluminium Shear Webs

Calcul à la ruine des âmes cisailées en aluminium

Bemessung von Aluminiumstehblechen auf Traglast

J.W. CLARK

Chief, Engineering
Design Division
Alcoa Research Laboratories
New Kensington, Pennsylvania, USA

M.L. SHARP

Senior Research
Engineer
Alcoa Research Laboratories
New Kensington, Pennsylvania, USA

Introduction

The object of this investigation was to develop equations for analyzing thin-web aluminum girders loaded in shear, taking into account the effect of elastic flexural rigidity of the flanges on the ultimate strength of the web, stiffeners and fasteners. Flange stiffnesses varying from zero to complete rigidity are included. Consideration is also given to the effect of web buckles on the appearance of the girder. Results are compared with experimental data for thin-web aluminum girders.

The authors believe that the factors considered in this investigation are the areas of primary importance relative to the shear strength of thin-web aluminum girders in current applications, probably the most common of which are highway van trailers and shipping containers. However, it should be noted that a number of potentially interesting areas for investigation are not included, such as combined shear and bending, longitudinal stiffeners, and plastic hinge formation in the flanges.

Analysis of Girder Web

Figure 1 illustrates three types of idealized stress distribution that can act in the web of a girder under shear loading [1, 11]. It is assumed in this analysis that at loads above the shear buckling stress, the girder continues to carry a component of pure shear equal to the shear buckling stress. Superimposed on the shear buckling stress is a component of diagonal tension of the kind shown

in Figure 1B and an additional component like that shown in Figure 1C, the ratio between the latter two components depending on the flange flexibility. It is assumed that the stresses introduced in the flanges by the tension field action are roughly of the same magnitude as stresses introduced in the stiffeners, with the result that the component of the tension field stress corresponding to rigid flanges is at an angle of $\pi/4$. The stress distributions assumed are considerable oversimplifications of the actual distribution [2, 8, 13], but are believed to be satisfactory for the purposes of this analysis.

The total shear capacity of a girder, V_T , is assumed to be the sum of the contributions from the three stress components illustrated in Fig. 1.

$$V_T = V_{cr} + V_1 + V_2 \quad (1)$$

where V_{cr} is the total shear corresponding to the shear buckling stress, τ_{cr} , and V_1 and V_2 are the shearing forces contributed by the tensions σ_1 and σ_2 , respectively. These three components are [1, 11]

$$V_{cr} = \tau_{cr} ht \quad (2)$$

$$V_1 = \frac{\sigma_1 ht}{2\sqrt{1 + \alpha^2}} \quad (3)$$

$$V_2 = \frac{\sigma_2 ht}{2} \quad (4)$$

in which h is the depth of web (distance between centroids of flange fasteners), t the web thickness, and α the aspect ratio (ratio of length of shear panel s to depth of panel, h).


The total shear carried by the web is thus

$$V_T = \tau_{cr} ht + \frac{\sigma_1 ht}{2\sqrt{1 + \alpha^2}} + \frac{\sigma_2 ht}{2} \quad (5)$$

All quantities in Eq. 5 are known for a given case except σ_1 and σ_2 . Reference [19] shows how σ_1 and σ_2 can be evaluated, based on a consideration of the deformations of the web and assuming that the total shear is limited by the combination of stresses which causes general yielding in the web. The following relationships result:

$$\sigma_2 = K\sigma_1 \quad (6)$$

$$K = \frac{770 \sqrt{1 + \alpha^2}}{\alpha} \left(\frac{I}{s^3 t} \right) \quad (7)$$

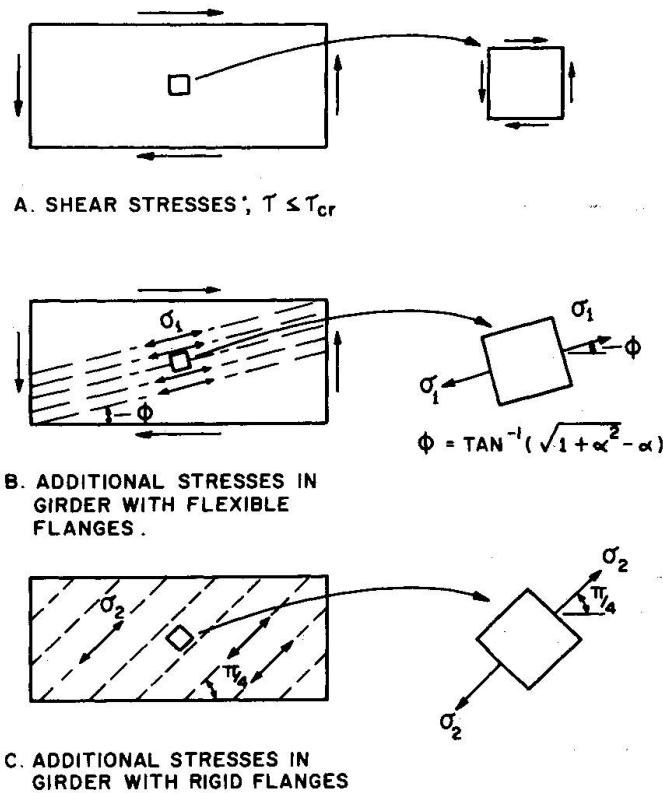

ASSUMED STRESSES IN BUCKLED GIRDERS WEB

FIGURE 1

in which I is the flange moment of inertia.

As shown in Ref. [19], the following equations can be derived for the average shear stress in the web at yielding, τ_T , the corresponding compressive force in the stiffeners, F_s , and the increment in flange force, F_f , due to diagonal tension:

$$\tau_T = \tau_{cr} + C_1 \frac{\sqrt{3}}{2} (\tau_y - \tau_{cr}) \quad (8)$$

$$F_s = C_2 (s - s_e) t (\tau_T - \tau_{cr}) \quad (9)$$

$$F_f = \frac{C_3 h t}{2} (\tau_T - \tau_{cr}) \quad (10)$$

The coefficients in these equations are (see Fig. 2)

$$C_1 = \left(\frac{1}{K+1} \right) \left(\frac{1}{\sqrt{1+\alpha^2}} + K \right) \quad (11)$$

$$C_2 = \frac{\sqrt{1+\alpha^2} - \alpha + K \sqrt{1+\alpha^2}}{1 + K \sqrt{1+\alpha^2}} \quad (12)$$

$$C_3 = \frac{(K+1) \sqrt{1 + \alpha^2}}{1 + K \sqrt{1 + \alpha^2}} \quad (13)$$

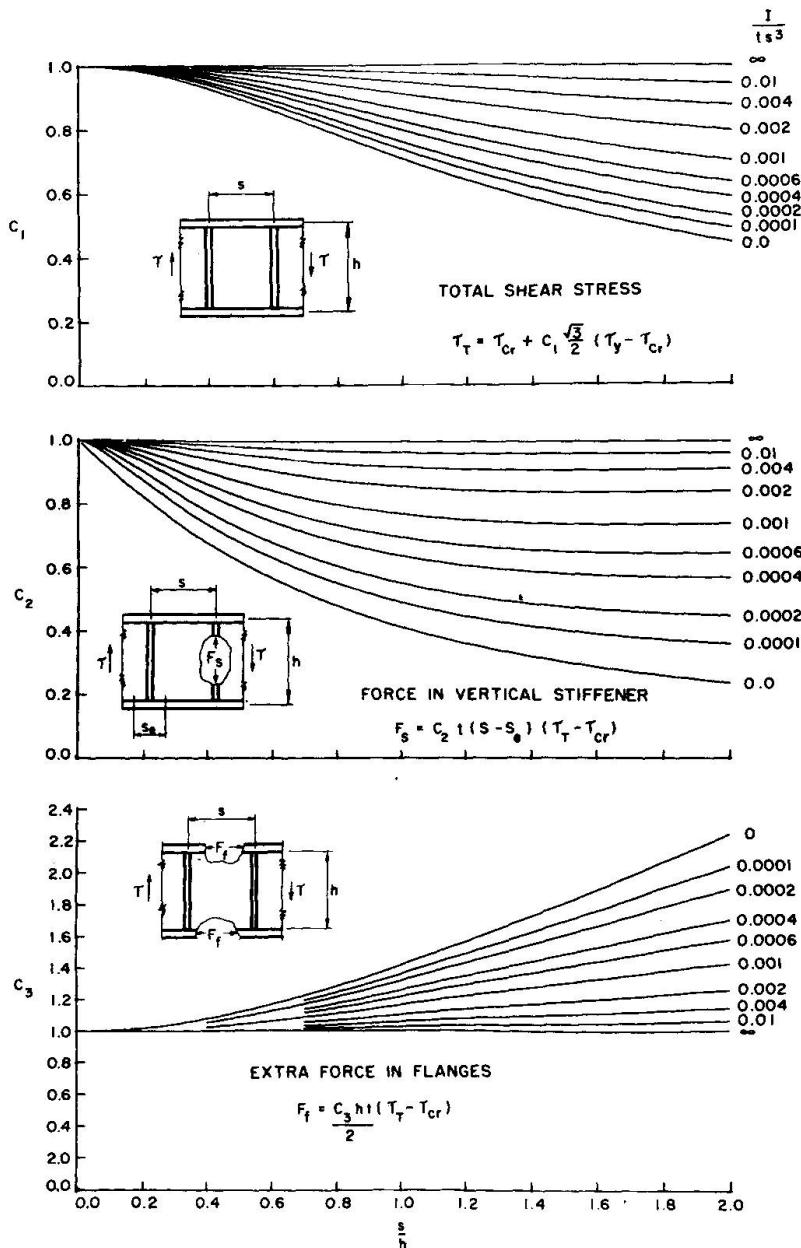


FIGURE 2

In Equation 9, the effective width of web acting with the stiffener, s_e , is given by

$$\text{If } \frac{s}{h} \leq 0.3, s_e = \frac{s}{2} \quad (14a)$$

$$\text{If } \frac{s}{h} > 0.3, s_e = 0.15h \quad (14b)$$

The experimental basis for Eq. 14a and 14b is discussed in Ref. [19].

If the ratio $I/t s^3$ exceeds 0.01, little accuracy is lost by considering the flanges to be completely rigid and letting $C_1 = C_2 = C_3 = 1.0$. This is true for many applications of aluminum girders.

Shear Buckling of Web

Although practical webs have some initial out-of-flatness and thus do not undergo true buckling, tests on aluminum girders [14, 15] have shown that the theoretical buckling stress gives an approximate indication of the load at which the web deflections become large and appreciable diagonal tension develops. For design purposes, the shear buckling stress can be expressed [3]:

In the elastic range: $\lambda > C_s$

$$\tau_{cr} = \frac{\pi^2 E}{\lambda^2} \quad (15)$$

In the inelastic range: $\lambda \leq C_s$

$$\tau_{cr} = B_s - D_s \lambda \quad (16)$$

where E is the modulus of elasticity, λ the equivalent slenderness ratio for shear buckling, and B_s and D_s are coefficients that depend on the yield strength and type of alloy [3].

Cook and Rockey have discussed the numerous factors that affect buckling behavior [4, 5, 6, 17]. The value of λ which is numerically about halfway between values corresponding to fixed and simply supported edges is [3]:

$$\lambda = \frac{a}{t} \sqrt{\frac{1.6}{1 + 0.7(a/b)^2}} \quad (17)$$

where a = smaller dimension of shear panel
 b = larger dimension of shear panel

When the web plate is sandwiched between flange members or between stiffener members, a and b are equal to the clear distances between flanges and between stiffeners. For one-sided flanges or stiffeners, a and b are equal to the distance between fastener centerlines.

Intermediate Stiffeners

Stiffeners on thin-web girders perform two functions. They divide the web into panels, thereby increasing the buckling strength of the web; and when the shear stress is above the buckling stress, the stiffeners act as compression struts.

The following formulas for the stiffener moment of inertia, I_s , required to develop the shear buckling strength of the panels correspond to the design equations used in current United States specifications for aluminum structures [10, 20]:

$$\text{For } \frac{s}{h_c} \leq 0.4, I_s = \frac{V_{cr} h_c^2}{0.154} \left(\frac{s}{h_c} \right) \quad (18a)$$

$$\text{For } \frac{s}{h_c} > 0.4, I_s = \frac{V_{cr} h_c^2}{0.96} \left(\frac{h_c}{s} \right) \quad (18b)$$


where I_s in mm^4 is measured about the face of the sheet for stiffeners on one side and h_c is the clear height of the web in mm. V_{cr} is the shear buckling load in MN.

For many girders, stiffeners designed in accordance with Eqs. 18a and 18b will have adequate column strength in the post-buckling range. For example, if s/h is 0.4 or less and the average web stress, τ , does not exceed about 10 τ_{cr} , there is no need to check column strength of the stiffeners, provided that Eq. 18a is satisfied. For more severe loading the stiffener should be checked to insure that it can carry the force F given by Eq. 9, acting as a column with a length h_c . The use of the depth of web as the effective length of stiffener is conservative because the lateral support provided by the web is neglected [11]. In one-sided stiffeners the combined axial plus bending stress should be less than the yield stress of the material divided by a suitable factor of safety.

Kuhn [11] has noted that thin-walled stiffeners may be deformed by the buckle waves in the web and subsequently fail locally by "forced crippling" under the compression in the stiffener. Figure 3 shows that forced crippling can be avoided if the thickness of the stiffener, t_s , is:

$$t_s \geq t \left(0.65 + 0.35 \sqrt{\frac{\tau}{\tau_{cr}}} \right) \quad (19)$$

where τ is the average shear stress on the web.

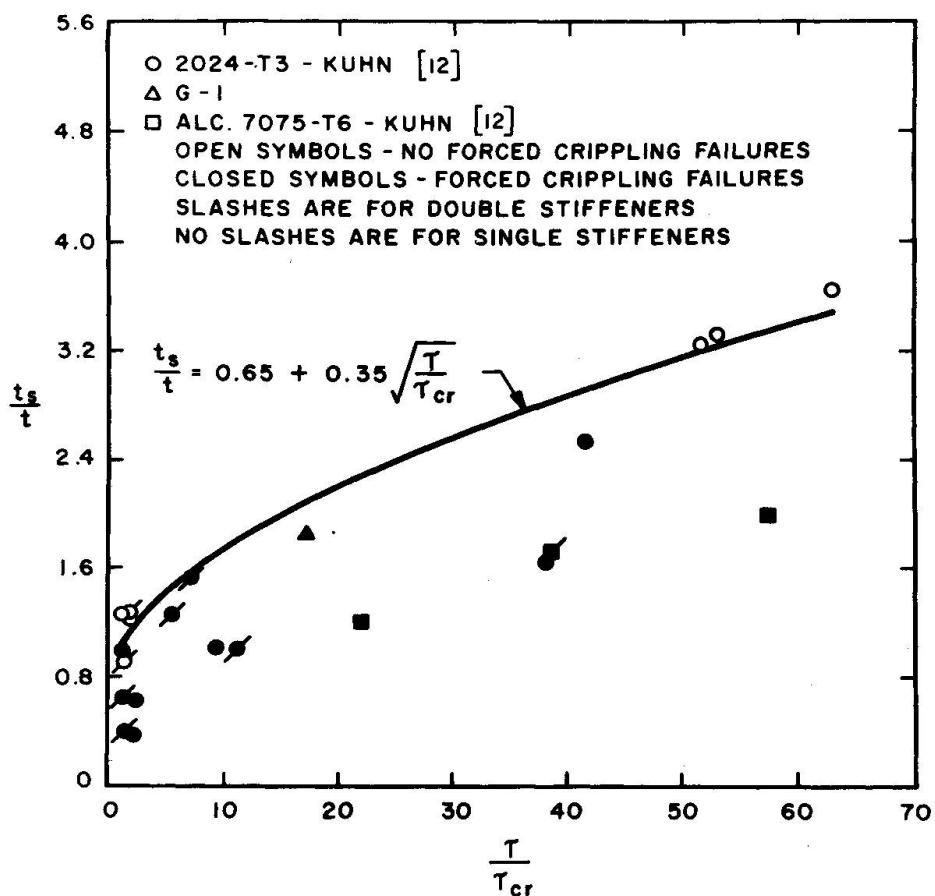

THICKNESS OF STIFFENER TO PROHIBIT
FORCED CRIPLING FAILURE OF STIFFENER

FIGURE 3

Flanges

The total axial force on the flange is that from Eq. 10 plus that from beam action. The flange should be checked for local buckling of the components, torsional buckling, lateral buckling and in the case of very thin webs, flexural buckling in the plane of the web between intermediate stiffeners. In the absence of a precise analysis, it is conservative to treat the flange as a column with an unsupported length equal to the stiffener spacing.

In the analysis in Ref. [19], an expression is developed for the lateral force on the flange exerted by the web. This force causes bending of the flange in the plane of the web. In practice this bending is generally ignored, as indicated by steel design rules [1, 21] and also aircraft experience [11]. The analysis of Fujii [7] and the tests of Rockey et al [18], however, tend to show that these forces are significant for design.

Connection of Web to Flanges and Stiffeners

An extensive survey of average stresses in the web near boundary members in steel girders [22] showed that these stresses were adequately given by calculations based on shear resistant behavior. Other recent tests [9] also indicate that membrane stresses near the edges of the panel are between values calculated for tension field and shear resistant behavior but nearer to the latter. This has been corroborated by strain measurements on an aluminum girder discussed later in this paper. Thus, it should be satisfactory to calculate the strength of the connection of web to flange members as though the web were shear resistant.

The load per unit length, R_f , is:

$$R_f = \tau_T t \quad (20)$$

The fastening between web and stiffener must at least be sufficient to develop the total load in the stiffener over one-half the length of the stiffener. To allow for some concentration of load, it has been proposed [1] to develop the load in one-third the length of the stiffener. The load per unit length, R_s , is thus:

$$R_s = \frac{3F_s}{h} \quad (21)$$

The framing at the ends of the girder must provide anchorage for the horizontal component of the web tension force at the end. This problem may be handled by making the end panel a shear resistant panel [1].


Appearance of Girder Web

In some cases it is desirable to proportion the girder so that the buckle waves present at working loads are small and not readily noticeable [16]. Reference [19] shows that this can be accomplished by limiting the average shear stresses on the web to a value equal to the shear buckling stress plus 10 MN/m².

While fatigue strength is not treated in this paper, it should be borne in mind that if the shear buckling stress is exceeded at working loads, the girder will be more susceptible to fatigue cracking than would a shear resistant web [22].

Test Results

Figure 4 shows details of a riveted aluminum girder having an h/t ratio of 532. The value of I/ts^3 for this girder was 0.027, so that its flanges were relatively rigid. The web material had a tensile strength of 450 MN/m². Figure 5 shows that the principal stresses at the centers of

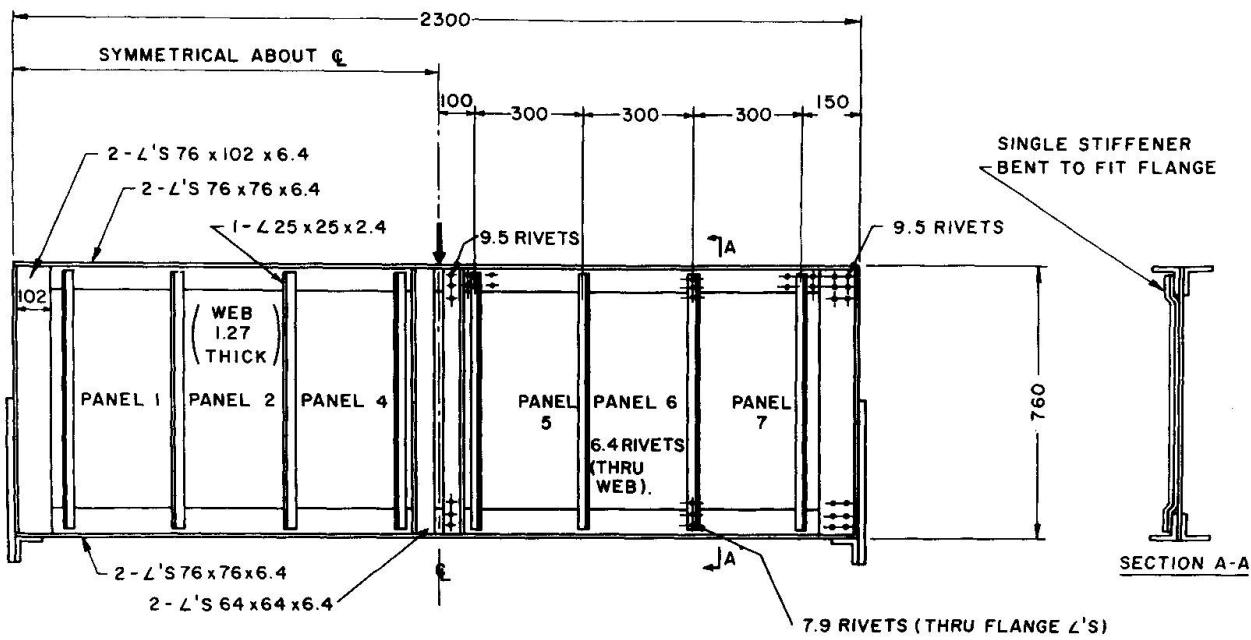

NOTES : 1.- MATERIAL
 ALL RIVETS 2017-T31
 ALL ANGLES 2024-T4
 WEB PLATE 2024-T3

2.- FAILURE BY TEARING OF WEB AT LOAD OF 320 KILO NEWTON; INTERMEDIATE STIFFENERS FAILED BY CRIPPLING AT A LOAD OF 294 KILO NEWTON.

3.- ALL DIMENSIONS IN MILLIMETERS.


GIRDER G-1

FIGURE 4

the panels calculated using Eq. 5 are in agreement with the values from test. The stresses at the edge of the panel for this girder were intermediate to the calculated values for tension field and shear resistant webs but nearer to the values corresponding to shear resistant behavior. Figure 6 presents the portion of flange stress due to diagonal tension in the web. Equation 10 is seen to give reasonably conservative values of flange stress.


In most of the tests on aluminum girders or shear panels, the ultimate strength has been measured but not the load to cause general yielding. Shear stress values given by Eq. 8, which is based on yielding, would be expected to be conservative in comparison to the ultimate strengths, and this is generally found to be the case, as illustrated by data [12] for riveted panels given in Fig. 7.

Figure 8 compares test strengths of aluminum girders reported by Moore [14, 15] and Girder G1 with those calculated by the use of Eq. 8. In some cases the ultimate load for the girders was limited by torsional or local buckling of the compression flange so that the test values are a "lower bound" to web strength. The test data, however, tend to confirm that Eq. 8 provides a reasonable estimate of the variation of strength with flange rigidity for these girders.

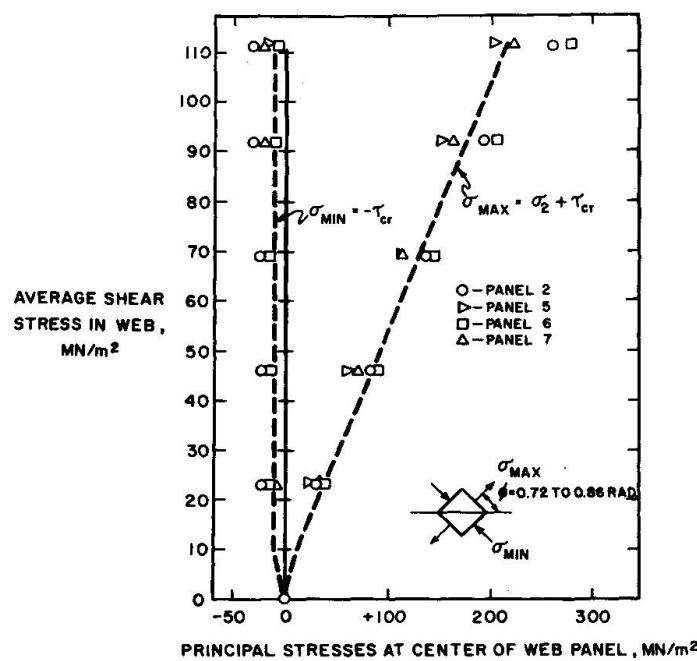


CALCULATED AND MEASURED STRESSES AT THE CENTER OF A PANEL - GIRDER G-1

FIGURE 5

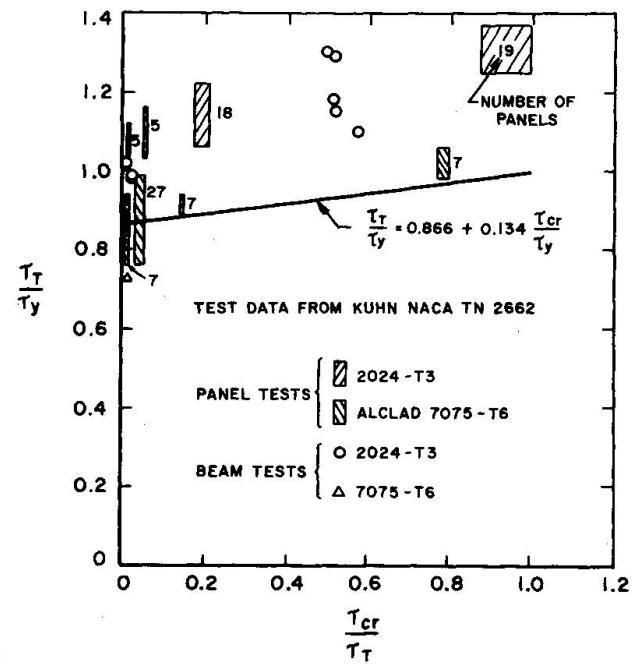


SHEAR STRENGTH OF PANELS AND BEAMS WITH RIGID FLANGES

FIGURE 7

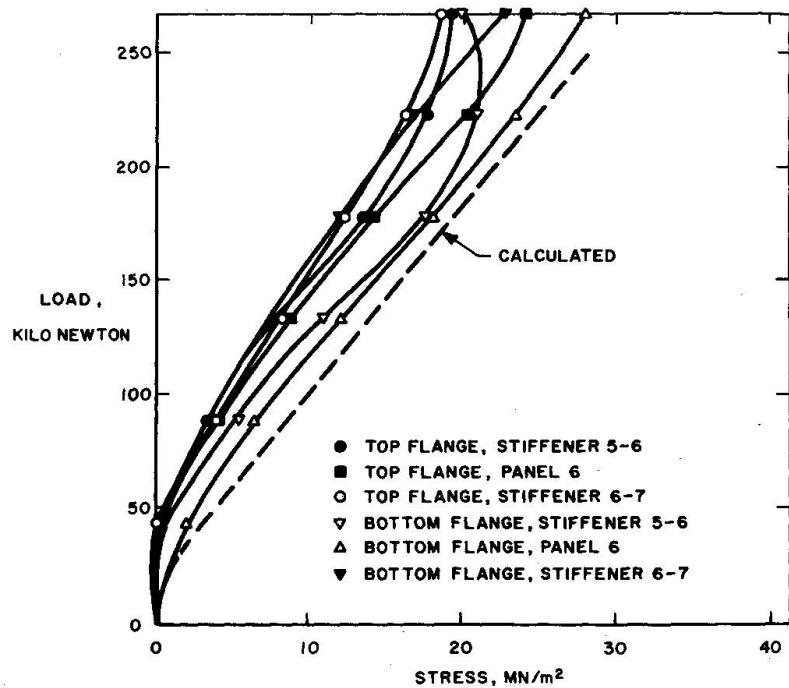

COMPRESSION STRESS IN FLANGE DUE TO DIAGONAL TENSION IN WEB

FIGURE 6

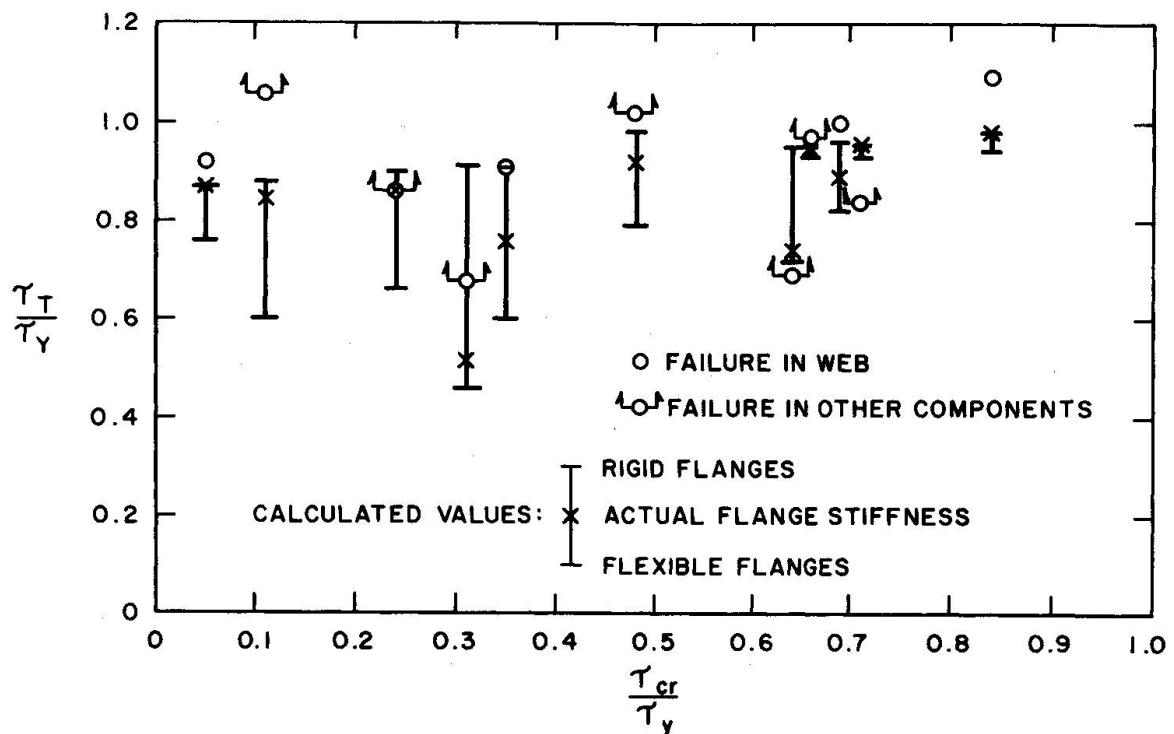

COMPARISON OF MEASURED AND CALCULATED SHEAR STRENGTHS OF ALUMINUM GIRDERS

FIGURE 8

Conclusions

Methods have been developed in this paper for analyzing the strength of thin aluminum shear webs in girders with flanges that are either flexible, rigid, or of intermediate stiffness. The steps to be taken in the analysis are summarized in Table 1.

Table 1

Steps in Analyzing Thin Web Aluminum Girders

1. Calculate τ_{cr} (Eq. 15-17). If fatigue is a major consideration, the web shear stress should not exceed τ_{cr} . If the web must not appear too wavy at design loads, the allowable shear stress in MN/m^2 should not exceed $(\tau_{cr} + 10)$, divided by a suitable factor of safety such as 1.2.

2. Calculate I/ts^3 . If it exceeds 0.01, the flange is relatively rigid, and the coefficients C_1 , C_2 , and C_3 in Eqs. 8, 9, and 10 can be considered as unity. If $I/ts^3 < 0.01$, C_1 , C_2 , and C_3 can be determined from Fig. 2.

3. Calculate τ_T from Eq. 8 and Fig. 2. The average shear stress in the web should not exceed τ_T divided by a suitable factor of safety, such as 1.65.

4. Check the stiffener moment of inertia I_s to make sure that it meets the requirements of Eqs. 18 a and 18b. Check the stiffener thickness by Eq. 19 to avoid forced crippling of the stiffener due to web buckling.

5. If $\tau_T/\tau_{cr} > 10$ or if $s/h > 0.4$, calculate the stiffener stress from Eq. 9 and Fig. 2. Compare with allowable column stresses.

6. Calculate the increment in flange stress from Eq. 10 and Fig. 2. Add the beam stress (Mc/I). The total flange stress must be within allowable limits for compression flanges of beams.

7. Check the spacing of flange and stiffener fasteners, using Eq. 20 and 21.

References

1. Basler, Konrad, "Strength of Plate Girders in Shear," Journal of the Structural Division, Proceedings, ASCE, Vol. 87, No. ST7, October, 1961, p. 151.
2. Basler, Konrad, "Strength of Plate Girders in Shear," closing discussion, Journal of the Structural Division, Proceedings, ASCE, Vol. 88, No. ST5, October, 1962, Part 1, p. 175.
3. Clark, J. W., and Rolf, R. L., "Buckling of Aluminum Columns, Plates and Beams," Journal of the Structural Division, Proceedings, ASCE, Vol. 92, No. ST3, June, 1966, p. 17.
4. Cook, I. T., and Rockey, K. C., "Shear Buckling of Clamped and Simple-Supported Infinitely Long Plates Reinforced by Transverse Stiffeners," The Aeronautical Quarterly, Vol. XIII, August, 1962.
5. Cook, I. T., and Rockey, K. C., "Shear Buckling of Clamped and Simply Supported Infinitely Long Plates Reinforced by Transverse Stiffeners," The Aeronautical Quarterly, Vol. XIII, February, 1962.
6. Cook, I. T., and Rockey, K. C., "Shear Buckling of Rectangular Plates With Mixed Boundary Conditions," The Aeronautical Quarterly, Vol. XIV, November, 1963.
7. Fujii, T., Minimum Weight Design of Structures Based on Buckling Strength and Plastic Collapse, (3rd report) - An Improved Theory on Post Buckling Strength of Plate Girders in Shear -, Journal of Society of Naval Architects (Japan) No. 122, December, 1967, p. 119-128.
8. Gaylord, E. H., "Strength of Plate Girders in Shear," discussion, Journal of the Structural Division, Proceedings, ASCE, Vol. 88, No. ST2, April, 1962, p. 151.
9. Goodpasture, D. W., and Stallmeyer, J. E., "Fatigue Behavior of Welded Thin Web Girders as Influenced by Web Distortion and Boundary Rigidity," Civil Engineering Studies, Structural Research Series No. 328, University of Illinois, August, 1967.
10. Hartmann, E. C., and Clark, J. W., "The U. S. Code," Proceedings, Symposium on Aluminum in Structural Engineering, The Institute of Structural Engineers and the Aluminum Federation, London, June 11-12, 1963.
11. Kuhn, P., Peterson, J. P., and Levin, L. R., "A Summary of Diagonal Tension, Part I - Methods of Analysis," National Advisory Committee for Aeronautics Technical Note 2661, May, 1952.

12. Kuhn, P., Peterson, J. P. and Levin, L. R., "A Summary of Diagonal Tension, Part II - Experimental Evidence," National Advisory Committee for Aeronautics Technical Note 2662, May, 1952.
13. Levy, S., Fienup, K. L., Woolley, R. M., "Analysis of Square Web Above Buckling Load, National Advisory Committee for Aeronautics Technical Note 962, February, 1945.
14. Moore, R. L., "Observations on the Behavior of Aluminum Alloy Test Girders," Transactions ASCE, Vol. 112, 1947, p. 901.
15. Moore, R. L., "An Investigation of the Effectiveness of Stiffeners on Shear-Resistant Plate-Girder Webs," National Advisory Committee for Aeronautics Technical Note No. 862, September, 1942.
16. Rockey, K. C., "Web Buckling and the Design of Webplates," The Structural Engineer, February, 1958.
17. Rockey, K. C., "Influence of Stiffener Thickness and Rivet Position Upon the Effectiveness of Single-Sided Stiffeners on Shear Webs," The Aeronautical Quarterly, Vol. XV, February, 1964.
18. Rockey, K., and Skaloud, M., "Influence of the Flexural Rigidity of Flanges Upon the Load-Carrying Capacity and Failure Mechanism of Webs in Shear," Acta Technica Csau, No. 3, 1969.
19. Sharp, M. L., and Clark, J. W., "Thin Aluminum Shear Webs," Journal of the Structural Division, Proceedings, ASCE, Vol. 97, No. ST4, April, 1971.
20. "Specifications for Aluminum Structures," Aluminum Construction Manual, The Aluminum Association, 1967.
21. "Specification for the Design, Fabrication and Erection of Structural Steel For Buildings," American Institute of Steel Construction, adopted February 12, 1969.
22. Yen, B. T., and Mueller, J. A., "Fatigue Tests of Large-Size Welded Plate Girders," Welding Research Council Bulletin 118, November, 1966.