

**Zeitschrift:** IABSE reports of the working commissions = Rapports des commissions de travail AIPC = IVBH Berichte der Arbeitskommissionen

**Band:** 13 (1973)

**Artikel:** Non-linear analysis for K-type braced steel frames

**Autor:** Wada, Akira / Suto, Fukuzo / Fujimoto, Morihisa

**DOI:** <https://doi.org/10.5169/seals-13743>

### **Nutzungsbedingungen**

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

### **Conditions d'utilisation**

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

### **Terms of use**

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

**Download PDF:** 30.03.2026

**ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>**

## Non-linear Analysis for K-Type Braced Steel Frames

Analyse non-linéaire des cadres en acier à structure en K

Nichtlineare Berechnung von Stahlrahmen mit K-Ausfachung

**Akira WADA**  
Staff  
Computer Division  
Nikken Sekkei Ltd.

**Fukuzo SUTO**  
Dr. Eng., Chief  
Computer Division  
Nikken Sekkei Ltd.  
Japan

**Morihisa FUJIMOTO**  
Dr. Eng., Professor  
Tokyo Institute  
of Technology

### 1. Introduction.

The architectural and civil engineering construction in Japan must be built up in the natural environments under frequently experienced great earthquakes and typhoons that visit our country at random or in autumn every year. Particularly in high storied buildings, since they are subjected to large repeated horizontal forces due to the earthquake and wind, there are several occasions that braces are set into frames as the structural elements against the external forces. (See Fig. 1)

Since, however, the brace bears a large axial force, it is needed to secure the rigidity and ultimate strength, so that a large cross-sectional members must be used. As a result the slenderness ratio ( $L/r$ ) becomes comparatively small in the order of 30~70, and consequently a brace on the compression side is apt to break down by plastic buckling.

In order to clarify the mechanical behavior of a structure having such characteristics analytically, this paper deals with a nonlinear analysis taking consideration of the nonlinearity due to the yield of materials and the nonlinearity based on the finite deformation theory unable to be neglected in the analysis of buckling, and thereby performs the analysis as mentioned below.

For the purpose, the behavior of compressive members with different slenderness ratio was first analyzed for repeated loadings, and after making various checkings of the results (omitted in this paper), the analysis of the behavior of 1 story 1 span frame provided with K-type braced as shown in Fig. 9 is made for the case in which a repeated horizontal force is applied.

Following is a review of selected recent studies conducted in our country on this topic. Yamada, Tsuji, and Takeda and Wakabayasi, Nonaka, Ogi, and Yamamoto studied the behavior of braces being subjected to repeated axial forces in the elasto-plastic range by using a small experimental model. On the other hand, Matsui, Mitani, and Tsumatori have studied the behavior of braces with various slenderness ratios in the state of buckling towards collapse state, taking propagation of plastic region in axial direction of material into consideration and using a numerical analysis of C-D-C method.

However, no exact analysis of braced frames has been reported yet, because it is extremely difficult to analyze the elasto-plastic behavior under the condition of repeated loading accompanied by such an instability phenomenon as buckling of braces.

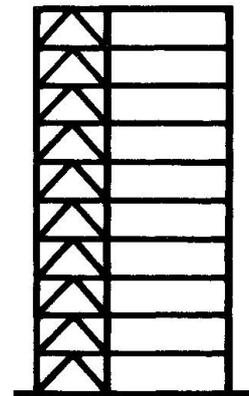


Fig.1 K-type braced frames

**2. Several assumptions taken for this analysis.**

- a. The residual stress and the deflection in the initial period due to welding etc. are not taken into account.
- b. The member is assumed to be of such type that the beam theory is applicable. But, in order to approximate the curves of each member after deformation, the member is divided into 5~15 elements (Fig. 2 & 9).
- c. In each element, only the bending deformation and the axial deformation is considered and the shearing deformation is neglected. As a result, the displacement functions used in this analysis are expressed by Eq. (1) (See Fig. 2).

$$\begin{Bmatrix} \Delta u \\ \Delta v \\ \Delta \theta \end{Bmatrix} = \begin{bmatrix} 1 & x & 0 & 0 & 0 & 0 \\ 0 & 0 & 1 & x & x^2 & x^3 \\ 0 & 0 & 0 & 1 & 2x & 3x^2 \end{bmatrix} \cdot m\alpha \quad (1)$$

where  $m\alpha = \{ m\alpha_1 \ m\alpha_2 \ m\alpha_3 \ m\alpha_4 \ m\alpha_5 \ m\alpha_6 \}^T \dots (2)$

The relation between incremental displacement  $\Delta mu$  and  $m\alpha$  of element  $m$  is expressed by Eq. (3) by substituting coordinates  $x = \pm c/2$  at both ends  $i$  and  $j$  of the element into Eq. (1). ( $c$  : length of element)

$$\Delta mu = mT \cdot m\alpha \quad \text{namely, } m\alpha = mT^{-1} \cdot \Delta mu \dots (3)$$

where  $\Delta mu = \{ \Delta mu_i \ \Delta mv_i \ \Delta m\theta_i \ \Delta mu_j \ \Delta mv_j \ \Delta m\theta_j \}^T \dots (4)$

- d. The strain ( $\Delta \epsilon_x$ ) in the element can be expressed by Eq. (5), taking a large deformation into consideration and using the assumption that its cross section remains plane after deformation;

$$\Delta \epsilon_x = \frac{d\Delta u}{dx} + \frac{1}{2} \left( \frac{d\Delta v}{dx} \right)^2 - \left( \frac{d^2\Delta v}{dx^2} \right) y \quad (5)$$

Derivatives of  $\frac{d\Delta u}{dx}$ ,  $\frac{d\Delta v}{dx}$  and  $\frac{d^2\Delta v}{dx^2}$  in Eq. (5) can be obtained by differentiating displacement function Eq. (1).

- e. Following the assumptions c & d, only  $\epsilon_x$  and  $\sigma_x$  are considered in each element, and yielding occurs according to their magnitude.
- f. As for the stress-strain relation of material, a hysteresis loop which is shown in Fig. 3 is used, considering the strain-hardening and the Bauschinger-effect.
- g. The distribution of stress intensity and strain in the cross section are considered by dividing the cross section into 20 layers as shown in Fig. 4, and the values of stress and strain in each layer are considered by the values at the each center of gravity.

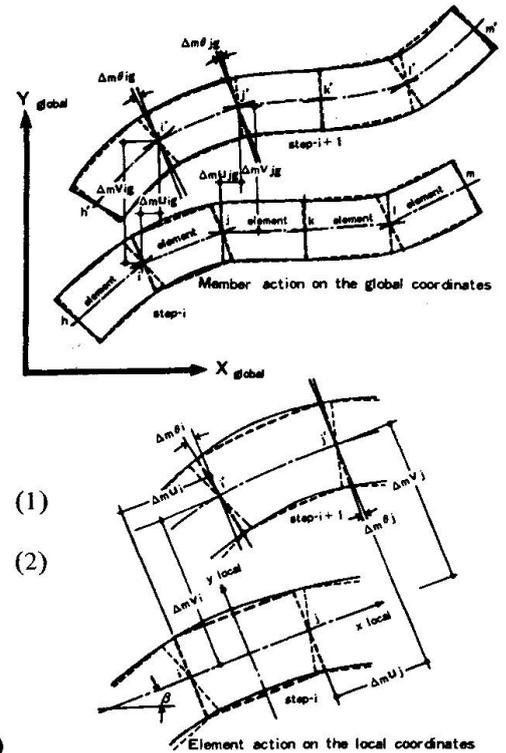


Fig. 2 Deformation & coordinates

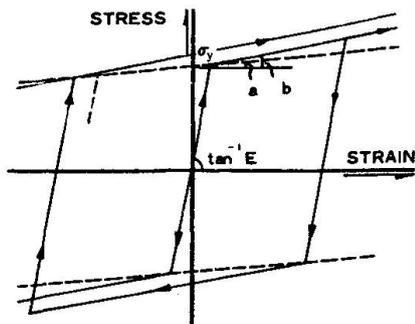


Fig. 3 Relation of stress-strain

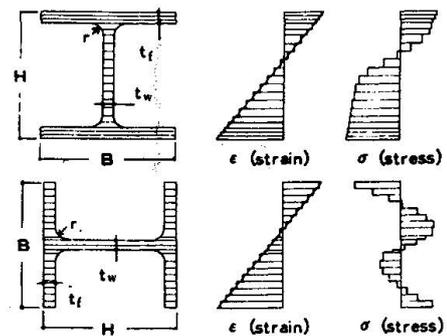


Fig. 4 Distribution of stress & strain

**3. Nonlinear analysis based on the stationary principle of potential energy.**

The strain energy  $mU$  which is stored in the element  $m$  by incremental displacements can be developed as follows,

$$mU = mU_1 + mU_2 \dots \dots \dots (6)$$

$$\text{where } \left\{ \begin{aligned} mU_1 &= \iiint_V \sigma_x \cdot \Delta \epsilon_x dx dy dz \\ &= \int_C \int_A \sigma_x \left\{ \frac{d\Delta u}{dx} + \frac{1}{2} \left( \frac{d\Delta v}{dx} \right)^2 - \frac{d^2 \Delta v}{dx^2} y \right\} dA dx \\ &= m\alpha^T m\mathbf{a}_1 + \frac{1}{2} m\alpha^T m\mathbf{A}_1 m\alpha - m\alpha^T m\mathbf{a}_2 \dots \dots \dots (7) \\ mU_2 &= \iiint_V \frac{1}{2} E (\Delta \epsilon_x)^2 dx dy dz \\ &= \int_C \int_A \frac{1}{2} E \left\{ \frac{d\Delta u}{dx} - \frac{d^2 \Delta v}{dx^2} y \right\}^2 dA dx \\ &= \frac{1}{2} m\alpha^T m\mathbf{A}_2 m\alpha - \frac{1}{2} m\alpha^T m\mathbf{A}_3 m\alpha + \frac{1}{2} m\alpha^T m\mathbf{A}_4 m\alpha \dots \dots \dots (8) \end{aligned} \right.$$

(herein, term  $\frac{1}{2} \left( \frac{d\Delta v}{dx} \right)^2$  in  $mU_2$  is dropped because it is considered negligible.)

Symbols of  $m\mathbf{a}_1$ ,  $m\mathbf{a}_2$ , and  $m\mathbf{A}_1 \sim m\mathbf{A}_4$  in Eq. (7) and Eq. (8) are vectors and matrices given as follows;

$$m\mathbf{a}_1 = \int_C \left( \int_A \sigma_x dA \right) \begin{Bmatrix} 0 \\ 1 \\ 0 \\ 0 \\ 0 \\ 0 \end{Bmatrix} dx \dots \dots (9) \quad m\mathbf{a}_2 = \int_C \left( \int_A \sigma_x \cdot y dA \right) \begin{Bmatrix} 0 \\ 0 \\ 0 \\ 0 \\ 2 \\ 6x \end{Bmatrix} dx \dots \dots \dots (10)$$

$$m\mathbf{A}_1 = \int_C \left( \int_A \sigma_x dA \right) \begin{bmatrix} 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 1 & 2x & 3x^2 \\ 0 & 0 & 0 & 2x & 4x^2 & 6x^3 \\ 0 & 0 & 0 & 3x^2 & 6x^3 & 9x^4 \end{bmatrix} dx, \quad m\mathbf{A}_2 = \int_C \left( \int_A E dA \right) \begin{bmatrix} 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 \end{bmatrix} dx \dots \dots (11) \dots \dots (12)$$

$$m\mathbf{A}_3 = \int_C \left( \int_A E \cdot y dA \right) \begin{bmatrix} 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 2 & 6x \\ 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 2 & 0 & 0 & 0 & 0 \\ 0 & 6x & 0 & 0 & 0 & 0 \end{bmatrix} dx, \quad m\mathbf{A}_4 = \int_C \left( \int_A E \cdot y^2 dA \right) \begin{bmatrix} 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 4 & 12x \\ 0 & 0 & 0 & 0 & 12x & 36x^2 \\ 0 & 0 & 0 & 0 & 12x & 36x^2 \end{bmatrix} dx \dots \dots (13) \dots \dots (14)$$

Equations from (9) to (14) include  $\int_A \sigma_x dA$ ,  $\int_A \sigma_x \cdot y dA$ ,  $\int_A E dA$ ,  $\int_A E \cdot y dA$  and  $\int_A E \cdot y^2 dA$  which are calculated on the both ends of divided elements according to the method which is described in the assumption (g) and are integrated inside of the elements assuming linear change in the respective axial directions of them. Here at the point situated in plastic region which  $\sigma_x$  is beyond the yield point, E is set as  $E_{st}$  in the calculation.

After carrying out calculation mentioned above, the strain energy stored in an element due to incremental displacement is given in Eq. (15).

$$\begin{aligned} mU &= m\alpha^T (m\mathbf{a}_1 - m\mathbf{a}_2) + m\alpha^T (m\mathbf{A}_1 + m\mathbf{A}_2 - m\mathbf{A}_3 + m\mathbf{A}_4) m\alpha \\ &= \Delta m\mathbf{u}^T m\mathbf{T}^{-1T} (m\mathbf{a}_1 - m\mathbf{a}_2) + \Delta m\mathbf{u}^T m\mathbf{T}^{-1T} (m\mathbf{A}_1 + m\mathbf{A}_2 - m\mathbf{A}_3 + m\mathbf{A}_4) m\mathbf{T}^{-1} \Delta m\mathbf{u} \\ &= \Delta m\mathbf{u}^T m\mathbf{f} + \frac{1}{2} \Delta m\mathbf{u}^T m\mathbf{K} \Delta m\mathbf{u} \dots \dots \dots (15) \end{aligned}$$

The potential energy of  $\Pi_{i+1}$  for the whole structure in  $(i+1)$  state is shown Eq. (17) by summing up strain energies of all elements and works done by external forces. The displacement components of all elements must be transformed into a global coordinate system using Eq. (16). (See Fig. 2)

$$\Delta \mathbf{m} \mathbf{u}_g = \mathbf{L} \Delta \mathbf{m} \mathbf{u} \quad \text{namely, } \Delta \mathbf{m} \mathbf{u} = \mathbf{L}^{-1} \Delta \mathbf{m} \mathbf{u}_g \quad \dots \dots \dots (16)$$

where  $\Delta \mathbf{m} \mathbf{u}_g$  : incremental displacement vector of element  $m$  in global coordinate.

$$\Pi_{i+1} = \Pi_i + \frac{1}{2} \Delta \mathbf{u}_g^T \mathbf{K} \Delta \mathbf{u}_g + \Delta \mathbf{u}_g^T \mathbf{f}_{in} - \Delta \mathbf{u}_g^T \mathbf{f}_{ex} \quad \dots \dots \dots (17)$$

where 
$$\mathbf{K} = \sum_m \mathbf{m} \mathbf{L}^{-1T} \mathbf{K}_m \mathbf{L}^{-1}$$
  

$$\mathbf{f}_{in} = \sum_m \mathbf{m} \mathbf{L}^{-1T} \mathbf{f}_{in}$$

As the potential energy is stationary in the equilibrium condition,  $\Delta \mathbf{u}_g$  can be obtained by the variational principle. Namely,  $\delta \Pi_{i+1} = 0$  for any arbitrary  $\delta \Delta \mathbf{u}_g$  results in the following equation.

$$\mathbf{K} \Delta \mathbf{u}_g + \mathbf{f}_{in} - \mathbf{f}_{ex} = 0 \quad \dots \dots \dots (18)$$

Vector  $\Delta \mathbf{u}_g$  is obtained by solving the simultaneous equation given in Eq. (18). The coordinate of each joint-point can be adjusted using  $\Delta \mathbf{u}_g$ .

The calculation of one step is completed when incremental strain  $\Delta \epsilon_x$  is obtained by Eq. (5) and with it the strain and stress at both ends of each element are adjusted.

The planned analysis is made possible by accumulating the calculation described above by the step-by-step method and iterating technique.

The flow chart of this numerical analysis is shown in Fig. 5.

**4. The elasto-plastic behavior of braced steel frames.**

4-1) Objects of analysis.

The elasto-plastic behaviors of braced steel frames are analyzed numerically and compared with the experimental results, assuming the condition under which a K-type braced steel frame is subjected to repeated horizontal forces as shown in Fig. 9.

The divided state of elements is shown in Fig. 9, and it is taken into consideration such effects that a large deformation could occur and complicated distribution of deformation in plastic region could be followed.

Further, behaviors under repeated loading are studied by increasing or decreasing displacements of loading-point in a stepwise method to the ultimate state. In order to compare with the experimental results the following values of yield-stress of steel members are used for the calculation.

- column and beam: (H-194x150x6x9)  $\sigma_y = 3.04 \text{ ton/cm}^2$
- brace: (H-100x100x6x8)  $\sigma_y = 2.86 \text{ ton/cm}^2$

4-2) The results of the analysis and discussions.

Fig. 6 shows the relation between horizontal external force and horizontal deformation. This figure shows that the overall behavior agrees sufficiently well with the experimental result except scattered differences. As for the largest load the analytical result gives a little larger value than the experimental result. This is probably due to incompleteness of the test specimen, namely the influence of initial deformation and residual stress.

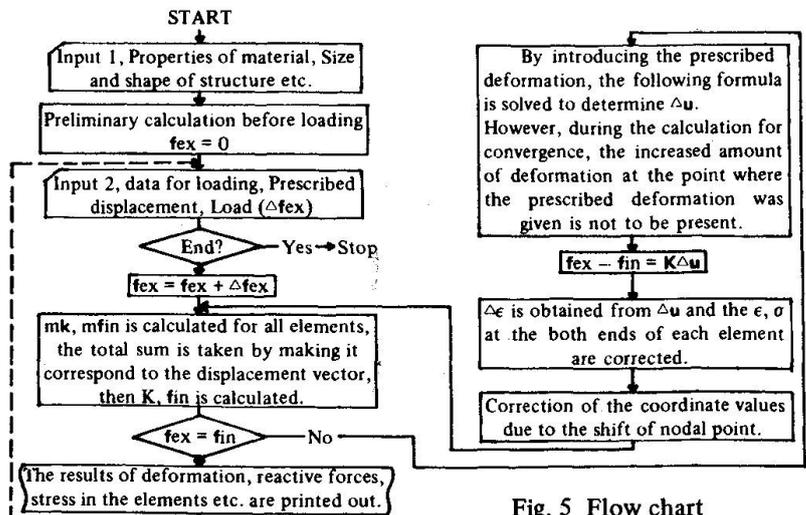


Fig. 5 Flow chart

The decrease of load after maximum loading (post-buckling of brace) is attained more suddenly in the analytical result than in the experimental result. The reason for this is that the analysis is made for the model which is replaced by beams with lengths which are spanning between nodal points, in other words, that some larger slenderness ratio is estimated in the analysis than in the test specimen.

Fig. 7 shows corresponding deformations to the state marked with heavy dots in Fig. 6. The scale of the deformation-figure is half of that of the model. The comparison of the final deformation form with Fig. 10 shows that they both are of very similar pattern. Fig. 8 shows the change of the yielded area until buckling is first observed on the brace of compressed side and also how yielded places occur as the deformation mode of braces changes.

**5. Conclusion.**

The numerical analysis of elasto-plastic behaviors of braced steel frames which are subjected to repeated horizontal forces and its comparison with experimental results has ascertained usefulness of this analytical method. It can be thought that this method of analysis generally makes it possible to analyze the elasto-plastic behaviors accompanied by instability phenomena, which hitherto was considered to be difficult, and also possible to acquire the distribution of stress inside of members, which is difficult to obtain from experiments.

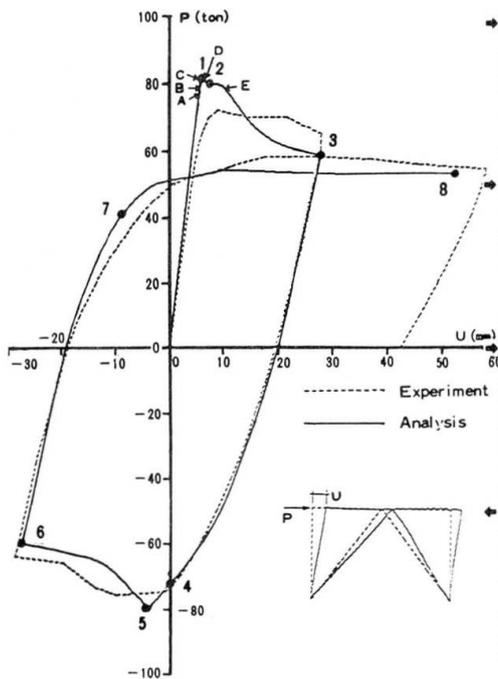


Fig. 6 Relation of load-deflection

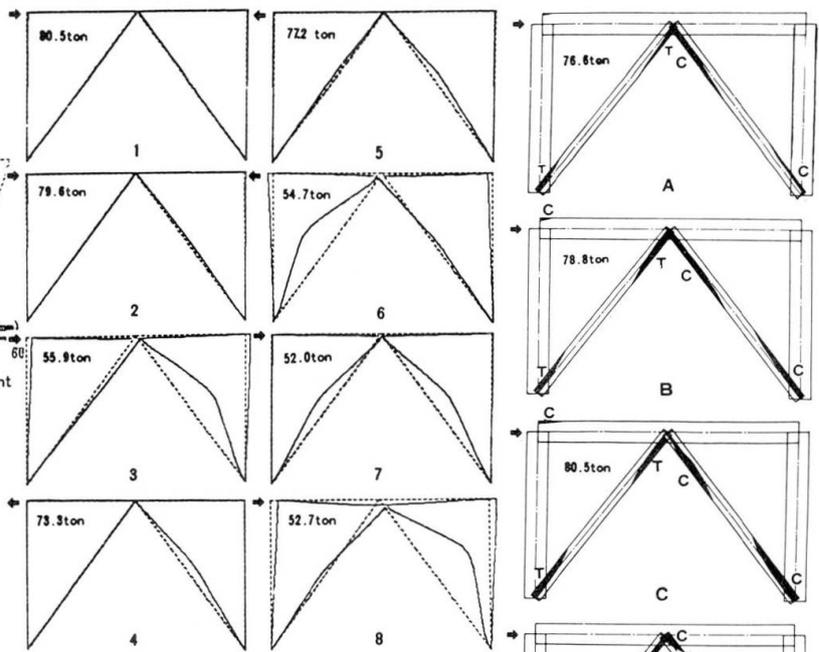


Fig. 7 Deformation of frames

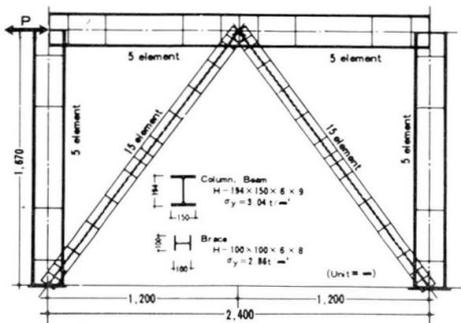


Fig. 9 Idealized model for the analysis

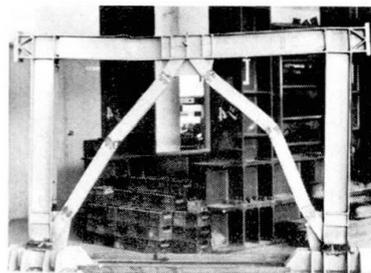


Fig. 10 Specimen after experiment

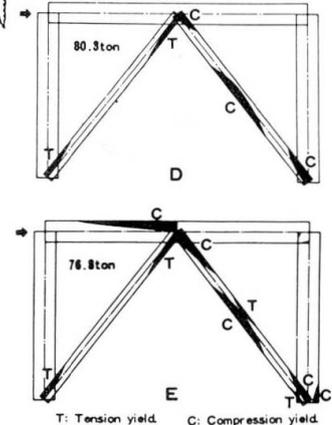


Fig. 8 Spread of plastic zones

## 6. Acknowledgement.

We would like to express our gratitude to Dr. Eng. H. HOKUGO and Mr. K. MORIYA of Nippon Telegraph and Telephone Public Corporation for providing with experimental data, enabling us to proceed in this study. We also wish to thank Mr. K. SHIRAKATA and Mr. R. KOSUGI, who were under graduate course of master of the Tokyo Institute of Technology when this research was being carried out.

## 7. Bibliography

- a. "The Introductory Report of IABSE Symposium 1973" autumn, 1972.
- b. Fujimoto, M., Hokugo, H., Hashimoto, A., Moriya, K.,: "Study on elasto-plastic behavior of braced rigid steel frame subjected to alternately repeated horizontal load. (No. 4) Trans. of Annual Meeting of A.I.J. Oct. 1972.
- c. Igarashi, S., Inoue, K., Kibayashi, M., Asano, M.: "Hysteretic characteristics of steel braced frames", Trans. of A.I.J. June, 1972.
- d. M.J. Turner, E.H. Dill, H.C. Martin, R.J. Melosh: "Large deflections of structures subjected to heating and external loads", A.I.A.A. Feb. 1960.

## SUMMARY

This paper deals with a nonlinear analysis of K-type braced steel frames taking consideration of both the nonlinearity due to the yield of materials and the nonlinearity based on the finite deformation theory unable to be neglected in the analysis of instability problems.

## RESUME

Ce rapport traite l'analyse élasto-plastique des cadres en acier avec contreventement en K en considérant la non-linéarité due au fluage du matériau et celle basée sur la théorie des déformations finies qui ne peut être négligée dans les problèmes d'instabilité.

## ZUSAMMENFASSUNG

Dieser Bericht befasst sich mit einer numerischen Untersuchung des elasto-plastischen Knickproblems in der Fachwerkebene von K-Fachwerkständern aus Stahl unter der Einwirkung statisch wechselseitig wiederholter Horizontalkraft nach der Theorie endlich grosser Verschiebungen, nebst Vergleich mit den Versuchsergebnissen.