

**Zeitschrift:** IABSE reports of the working commissions = Rapports des commissions de travail AIPC = IVBH Berichte der Arbeitskommissionen

**Band:** 16 (1974)

**Artikel:** A simplified model for nonlinearly viscoelastic columns

**Autor:** Cervera, H.A. / Creus, G.J.

**DOI:** <https://doi.org/10.5169/seals-15717>

#### **Nutzungsbedingungen**

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

#### **Conditions d'utilisation**

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

#### **Terms of use**

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

**Download PDF:** 26.01.2026

**ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>**

## A Simplified Model for Nonlinearly Viscoelastic Columns

Un modèle simplifié pour le calcul visco-élastique non-linéaire des colonnes

Ein vereinfachtes Modell für nichtlineare viskoelastische Stützen

H. A. CERVERA

Assistant Professor

Institute of Applied Mechanics and Structures (I.M.A.E.)

Universidad Nacional de Rosario

Rosario, Argentina

G. J. CREUS

Associate Professor

### 1. INTRODUCTION

Adequate theories exist for the analysis of deformation and failure of linearly viscoelastic columns. J. N. Distefano, /1/, has studied the problem in a series of papers of great generality, considering arbitrary end conditions, lateral loads and initial imperfections, and the most general expression for linear creep.

However, both instantaneous and time dependent deformations of concrete are nonlinear, specially at high stresses. In fact, the behaviour of concrete ranges from almost linear, bounded creep at low stresses to highly nonlinear, unbounded creep at stresses near the compressive strength.

The effect of nonlinear behaviour on creep buckling is analyzed in this paper. In Section 2 a nonlinear rheological model apt to describe the behaviour of concrete for the whole range of stresses is introduced.

In Section 3, the creep buckling problem is studied for the above mentioned rheological model, using a simplified model for the column.

In section 4, the model is refined by considering additional effects present in real situations, as the influence of axial thrust on the bending rigidity and the different behaviour of concrete in loading and unloading processes /2/.

For the simpler situations, analytical solutions to the differential equations are used. In the general case, a step by step numerical analysis is necessary. The effect of ageing of concrete may be easily taken into account by taking age dependent coefficients.

### 2. RHEOLOGICAL MODEL

The proposed model, shown in Fig.1 is similar to the well known standard solid. Its particular feature is the nonlinear stress-strain relation assumed for the spring elements 1 and 2. We denote with  $\varepsilon_1(t)$  the strain due to the deformation of spring element 1 and with  $\varepsilon_2(t)$  the strain corresponding to

spring 2 and dashpot. The total strain is  $\varepsilon(t) = \varepsilon_1(t) + \varepsilon_2(t)$ , where  $t$  denotes the time.

For spring 1 we assume the stress-strain relation

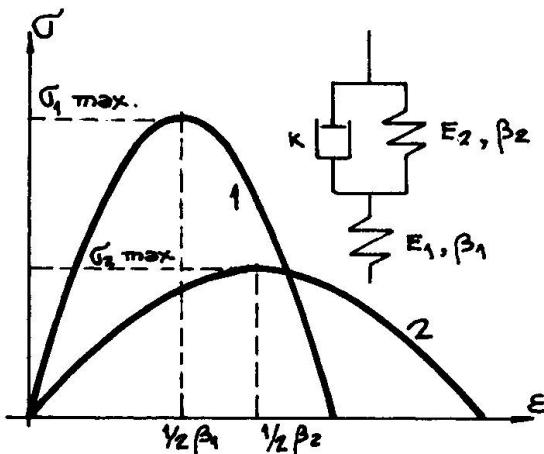


FIG. 1: RHEOLOGICAL MODEL

$$\sigma = E_1 \varepsilon_1 (1 - \beta_1 \varepsilon_1) ; \quad 0 \leq \varepsilon_1 \leq \frac{1}{\beta_1} \quad (1)$$

Here  $\sigma(t)$  is the stress and  $E_1, \beta_1$  are material constants. This equation defines a maximum stress  $\sigma_1^{\max} = \frac{E_1}{4\beta_1}$  and a corresponding deformation  $1/2\beta_1$ . Increasing deformations from  $1/2\beta_1$  to  $1/\beta_1$  are possible for decreasing stresses. No physical meaning is attached to deformations larger than  $1/\beta_1$ .

The nonlinear Kelvin element constituted by the spring 2 and the dashpot is responsible for the time dependent behaviour. The spring 2 and the dashpot are defined by the relationships

$$\sigma' = E_2 \varepsilon_2 (1 - \beta_2 \varepsilon_2) ; \quad 0 \leq \varepsilon_2 \leq \frac{1}{\beta_2} \quad (2)$$

$$\sigma'' = K \dot{\varepsilon}_2$$

where  $E$ ,  $\beta$  and  $K$  are material constants and the dot indicates differentiation with respect to time. Being  $\sigma = \sigma' + \sigma''$  we obtain the equation for the nonlinear Kelvin element

$$\dot{\varepsilon}_2 - \frac{\beta_2 E_2}{K} \varepsilon_2^2 + \frac{E_2}{K} \varepsilon_2 = \frac{\sigma}{K} \quad (3)$$

which is a Riccati's first order nonlinear differential equation.

We shall consider now the case of a constant stress  $\sigma(t) = \sigma_0$  applied at time  $t=0$  and maintained thereafter. Inversion of Eq.(1) provides the expression

$$\varepsilon_1 = \frac{1}{2\beta_1} \left( 1 - \sqrt{1 - \frac{\sigma_0}{\sigma_1^{\max}}} \right) ; \quad 0 \leq \varepsilon_1 \leq \frac{1}{2\beta_1} \quad (4)$$

for the instantaneous deformation. In order to determine the value of the delayed deformations, we must replace the value  $\sigma_0$  into (3) and solve it (for more details see Ref./3/). Adding instantaneous and time dependent deformations, the final expressions are

$$\varepsilon(t) = \frac{1}{2\beta_1} \left( 1 - \sqrt{1 - \frac{4\beta_1 \sigma_0}{E_1}} \right) + \frac{1}{2\beta_2} \left( \frac{1 - \sqrt{1 - \frac{4\beta_1 \sigma_0}{E_1}}}{-1 - \sqrt{1 - \frac{4\beta_1 \sigma_0}{E_1}}} \frac{-1 - \sqrt{1 - \frac{4\beta_1 \sigma_0}{E_1}} + (-1 + \sqrt{1 - \frac{4\beta_1 \sigma_0}{E_1}}) \exp(-\frac{E_2}{K} \sqrt{1 - \frac{4\beta_1 \sigma_0}{E_1}} t)}{-1 - \sqrt{1 - \frac{4\beta_1 \sigma_0}{E_1}} - (-1 + \sqrt{1 - \frac{4\beta_1 \sigma_0}{E_1}}) \exp(-\frac{E_2}{K} \sqrt{1 - \frac{4\beta_1 \sigma_0}{E_1}} t)} \right) \quad (5)$$

$$\varepsilon(t) = \frac{1}{2\beta_1} \left( 1 - \sqrt{1 - \frac{4\beta_1 \sigma_0}{E_1}} \right) + \frac{1}{2\beta_2} \left( \frac{t}{\frac{2K}{E_2} + t} \right) \quad (6)$$

$$\varepsilon(t) = \frac{1}{2\beta_1} \left( 1 - \sqrt{1 - \frac{4\beta_1 \sigma_0}{E_1}} \right) + \frac{1}{2\beta_2} \left( \frac{\gamma}{\delta + 2\sqrt{\delta - 1}} \frac{\sin \frac{E_2}{K} \sqrt{\delta - 1} t - \cos \frac{E_2}{K} \sqrt{\delta - 1} t}{\sin \frac{E_2}{K} \sqrt{\delta - 1} t + (\delta - 2) \cos \frac{E_2}{K} \sqrt{\delta - 1} t} \right) \quad (7)$$

for  $\delta < 1$ ,  $\delta = 1$  and  $\delta > 1$  respectively, being  $\gamma = 4\beta_2 \sigma_0 / E_2 = \sigma_0 / \sigma_2^{\max}$  (8)

The behaviour of the model under constant stress is indicated in Fig.2. We

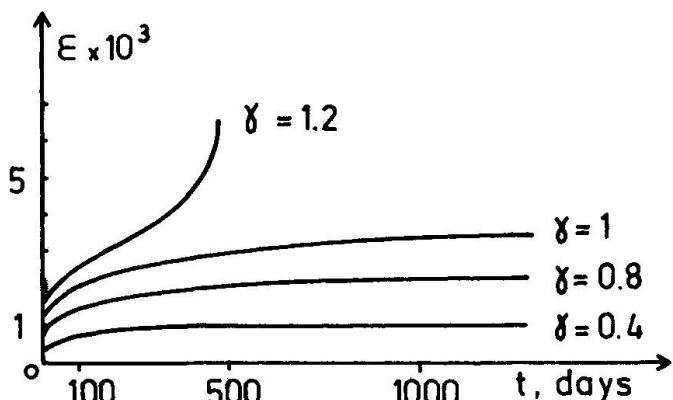


FIG.2: CREEP CURVES FOR THE RHEOLOGICAL MODEL

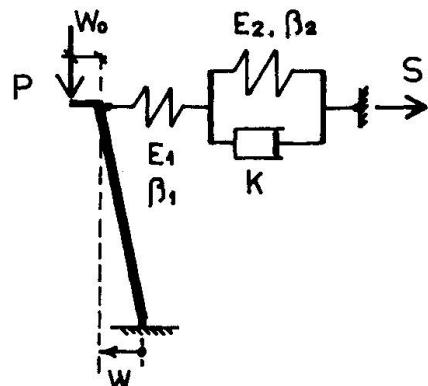


FIG.3: COLUMN MODEL

may see that for  $\gamma > 1$ , i.e. for  $\sigma_0 > \sigma_2^{\max}$  a condition similar to failure is reached after a finite time. As  $\sigma_1^{\max}$  is the strength under instantaneous loading,  $\sigma_2^{\max}$  may be interpreted as the strength under sustained load (static fatigue). In Ref./3/ a comparison of this model behaviour with the experimental results of Rüsch /4/ is given.

### 3. SIMPLIFIED COLUMN MODEL

Let us consider now the system in Fig.3. In this structure the deflexion of the hinged bar due to the action of the force  $P$  is prevented by a viscoelastic element which in turn reacts with a force  $S$ . This simple model contains many of the more interesting features of considerably more complex systems. For small, quasi-static deflexions, equilibrium provides the relation

$$S = P \frac{W + W_0}{L} \quad (9)$$

We are interested in the behaviour of this column model in the presence of nonlinear creep. For the sake of clarity, we shall study first some simpler situations.

3.1. Linear spring ( $\beta_1=0; E_2=\infty$ ): The force in the spring is  $S=E_1 w$ ; from this and (9) we obtain

$$E_1 w = \frac{P(W + W_0)}{L} \quad \text{or} \quad w = \frac{W_0}{\frac{E_1 L}{P} - 1} \quad (10)$$

When  $P \rightarrow LE_1$  we have  $w \rightarrow \infty$ ;  $P_E = LE_1$  may be considered the buckling load for this case.

3.2. Linear Kelvin material ( $\beta_2=0; E_1=\infty$ ): The force in the viscoelastic element is  $S=E_2 w+Kw$ ; the differential equation for equilibrium is

$$\dot{w} + w \left( \frac{E_2}{K} - \frac{P}{LK} \right) - \frac{Pw_0}{LK} = 0 \quad (11)$$

It may be seen that the solution of (11) shall be bounded for  $t \rightarrow \infty$  whenever the coefficient of  $w$  is positive; thus, the creep buckling load in this case is  $P_k = LE_2$ , while the instantaneous load is infinite.

3.3. Linear standard material ( $\beta_1=\beta_2=0$ ): Proceeding in a similar way, we find

in this case  $P_E = LE_2$ ;  $P_k = LE_1 E_2 / (E_1 + E_2)$ .

Both 3.2 and 3.3 are particular cases of the general linear viscoelastic problem as studied by Distefano [1]. The creep buckling load is given (as it should) by the reduced modulus load. Physically, this may be interpreted saying that, in order to obtain the load stable for  $t \rightarrow \infty$ , only the spring constants are significant, as the action of the dashpot vanishes for  $t \rightarrow \infty$  (\*).

3.4. Nonlinear spring ( $E_2 = \infty$ ): The force in the spring is now  $S = E_1 w (1 - \beta_1 w)$ ; from this and (9) we have

$$E_1 w (1 - \beta_1 w) = \frac{P(w + w_0)}{L} \quad (12)$$

Solving for  $w$  we find that for each pair of values  $(P, w_0)$  there exist two equilibrium points, defined by

$$w = -\frac{1}{2\beta_1} \left( \frac{P}{LE_1} - 1 \right) \pm \frac{1}{2} \sqrt{\frac{1}{\beta_1^2} \left( \frac{P}{LE_1} - 1 \right)^2 - \frac{Pw_0}{LE_1\beta_1}} \quad (13)$$

and represented by points A and B in Fig.4. It is easy to see that A corresponds to stable equilibrium and B to unstable equilibrium. The maximum load that allows stable equilibrium is obviously that corresponding to point C and may be obtained making the square root equal to zero. We obtain

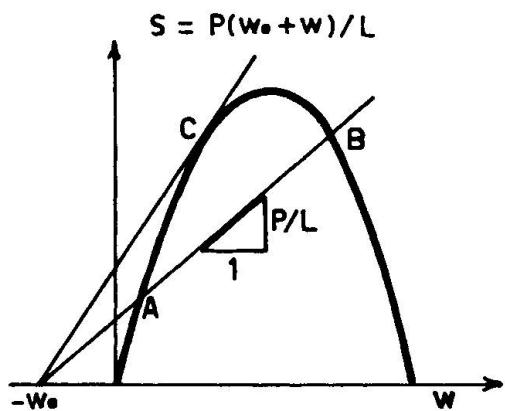


FIG.4: NONLINEAR SPRING

$$P_E = LE_1 \left\{ \left( 2w_0\beta_1 + 1 \right) - 2w_0\beta_1 \sqrt{1 + \frac{1}{w_0\beta_1}} \right\} \quad (14)$$

$$w_{cr} = w_0 \left( \sqrt{1 + \frac{1}{w_0\beta_1}} - 1 \right)$$

Also from Fig.4 we may see that, in order to reach the critical condition, one may increase the load  $P$  to  $P_E$  or increase the initial eccentricity  $w_0$ . Thus, a column whose material is characterized by a nonlinear stress-strain relation for instantaneous loading has a critical deflection at which the applied load is the critical load. This fact is specially important in the treatment of creep buckling problems.

3.5. Nonlinear Kelvin material ( $E_1 = \infty$ ): In this case we have  $S = E_2 w (1 - \beta_2 w) + Kw$ ; From this and (9) we obtain

$$\dot{w} - \frac{E_2\beta_2}{K} w^2 + \frac{E_2}{K} \left( 1 - \frac{P}{LE_2} \right) w - \frac{Pw_0}{LK} = 0 \quad (15)$$

Eq.(15) is formally identical with (3). Following the same procedure we obtain the corresponding solution for  $w(t)$ , namely

(\* ) This is of course only true for materials with bounded deformations, i.e. solids.

$$w(t) = \frac{1}{2\beta_2} \left(1 - \frac{P}{LE_2}\right) \left\{ 1 - \sqrt{1-\Gamma} \frac{1 + \sqrt{1-\Gamma} + (1-\sqrt{1-\Gamma}) \exp\left(-\frac{E_2}{K} \left(1 - \frac{P}{LE_2}\right) \sqrt{1-\Gamma} t\right)}{1 + \sqrt{1-\Gamma} - (1-\sqrt{1-\Gamma}) \exp\left(-\frac{E_2}{K} \left(1 - \frac{P}{LE_2}\right) \sqrt{1-\Gamma} t\right)} \right\} \quad (16)$$

$$w(t) = \frac{1}{2\beta_2} \left(1 - \frac{P}{LE_2}\right) \left\{ \frac{t}{\frac{2K}{E_2 \left(1 - \frac{P}{LE_2}\right)} + t} \right\} \quad (17)$$

$$w(t) = \frac{1}{2\beta_2} \left(1 - \frac{P}{LE_2}\right) \left\{ \Gamma \frac{1 + \sqrt{\Gamma-1} \sin \frac{E_2}{K} \sqrt{\Gamma-1} t - \cos \frac{E_2}{K} \sqrt{\Gamma-1} t}{\Gamma + 2\sqrt{\Gamma-1} \sin \frac{E_2}{K} \sqrt{\Gamma-1} t + (\Gamma-2) \cos \frac{E_2}{K} \sqrt{\Gamma-1} t} \right\} \quad (18)$$

for  $\Gamma < 1$ ,  $\Gamma = 1$  and  $\Gamma > 1$  respectively, being

$$\Gamma = \frac{\frac{4P}{LE_2} w_0 \beta}{\left(1 - \frac{P}{LE_2}\right)^2} \quad (19)$$

Thus, the critical load is given by

$$P_c = LE_2 \left(1 + 2\beta w_0 - \sqrt{4\beta w_0 (\beta w_0 + 1)}\right) \quad (20)$$

Comparing this with (14), we see that, as for the linear case, the load for infinite stability corresponds to the instantaneous critical load of a similar column where the Kelvin body has been replaced by the spring.

3.6. Nonlinear standard material: In this case, a closed solution has not been found. The problem has been solved numerically, using a step by step procedure.

The time interval of interest is divided into small (\*) time intervals  $\Delta t$ . Then, at a time  $t$ , the force  $S(t)$  satisfies the equation

$$S(t) = \frac{P}{L} (w_0 + w) = \frac{P}{L} (w_0 + w_d + w_e) = \frac{P}{L} \left( w_0 + w_d(t) + \frac{1 - \sqrt{1 - \frac{4\beta_1 S(t)}{E_1}}}{2\beta_1} \right) \quad (21)$$

where  $w_d$  is the delayed deflection for time  $t$  (of course,  $w_d = 0$  for  $t=0$ ), and  $w_e$  is the elastic deflection. In the following time interval  $(t, t+\Delta t)$  we consider the spring 1 frozen, while the Kelvin element deforms under the action of force  $S(t)$  assumed constant during the interval. The corresponding creep deformation is

$$\Delta w_d = \frac{S(t) - E_2 w_d(t) (1 - \beta_2 w_d(t))}{K} \Delta t \quad (22)$$

and the delayed deformation now amounts to  $w_d(t+\Delta t) = w_d(t) + \Delta w_d$ . Then,  $w_d(t+\Delta t)$  is replaced into (21) and the process continues in the same fashion. The outlined procedure is very easily programmed for a digital computer.

The analysis of the results may be better understood looking at Fig.5. Line OA represents the  $t=0$  isochronous curve for the material and corresponds to the  $\sigma-\epsilon$  relation for spring 1 in Fig.1. Line OFR corresponds to the  $t=\infty$  isochronous curve and represents the behaviour of springs 1 and 2 in series.

(\*) Small when compared with the characteristic retardation time of the model.

Different loads, applied with eccentricity  $w_e$ , are represented by straight lines beginning at N. We observe that:

1) The instantaneous buckling load  $P_E$  (line NA) depends only on the characteristics of spring 1 and the initial eccentricity  $w_0$ .

2) The creep buckling load  $P_k$  (line NF) depends on the characteristics of springs 1 and 2 and the initial eccentricity  $w_e$ . More precisely, it may be evaluated as the instantaneous buckling load of an ideal elastic nonlinear column with a spring equivalent to springs 1 and 2 in series.

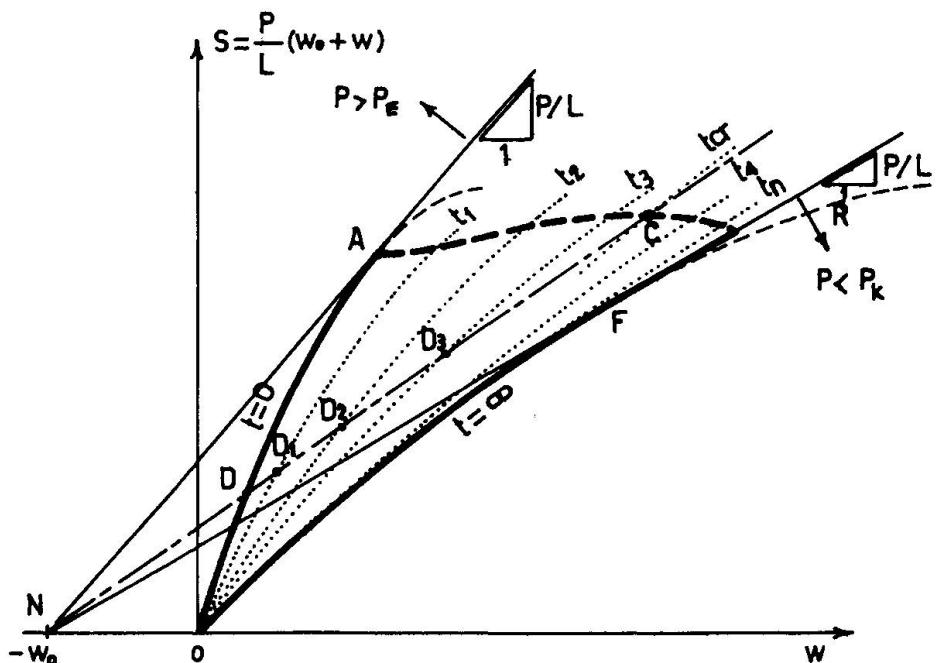


FIG.5: NONLINEAR STANDARD MATERIAL

This behaviour resembles in some ways the case of linear viscoelastic columns (see Section 3.3) where a reduced modulus exists. Of course, being the present problem nonlinear, a unique reduced modulus does not exist, and the load  $P_k$  depends on the initial eccentricity.

3) A column loaded with  $P_0 < P_k$  reaches a limit deflection with a velocity that depends on the value of  $K$ .

4) If a load  $P_e > P_\phi > P_k$  (represented by NC) is applied, an instantaneous equilibrium position D is reached at  $t=0$ . As time goes on, successive equilibrium positions  $D_1, D_2, \dots$  are reached. At some time  $t_{cr}$  (which depends on the value of K) the delayed deflection  $w_p$  reaches a value for which  $P_\phi$  is critical for spring 1. At this time, the column fails suddenly. Failure points lay along a frontier indicated by AC.

The pattern of behaviour described closely resembles that observed experimentally /5,6/.

#### 4. A REFINED MODEL

The model studied in Section 3 does not take into account:  
 a) the effect of axial thrust  $P$  on the bending rigidity

b) the different behaviour of concrete in loading and unloading processes. In order to take account of this influences, a refined model may be used, as indicated in Fig.6. Accordingly, the stress-strain relation for the springs in the rheological model has been generalized, as indicated in Fig.7

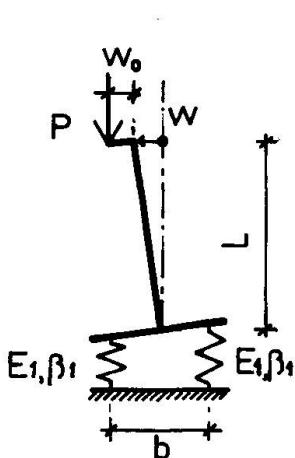


FIG.6: REFINED COLUMN MODEL

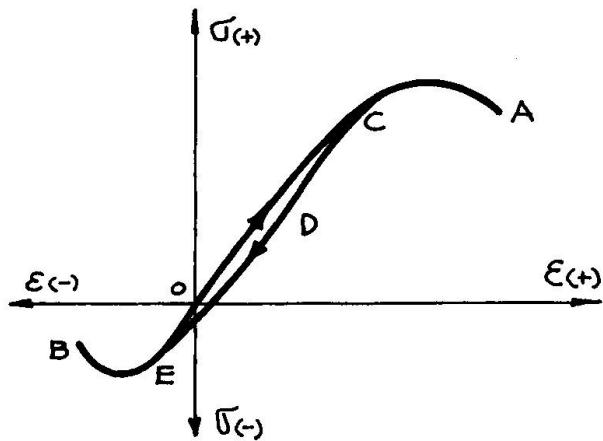


FIG.7: STRESS-STRAIN RELATION

Stresses and strains are now taken with their corresponding signs (compression:positive; tension:negative). Then, the base curve OA in compression is given by Eq.(1) with  $E_1$  and  $\beta_{1c} > 0$ ; the base curve OB in tension is given by the same Eq.(1) with  $E_1$  and  $\beta_{1T} < 0$ . During unloading, the material behaves along line CDE with origin in C and  $E_1$ ,  $\beta_1^* = \frac{\beta_{1c} \beta_{1T}}{\beta_{1c} - \beta_{1T}} < 0$ . This curve contacts the base curve OB at point E smoothly (both curves have a common tangent at point).

By putting together the equilibrium and compatibility equations for the column model, and the constitutive relations of the springs, a system of equations is obtained that allows the study of the stability of the model. Comparing the critical loads obtained using this model ( $P_{cr2}$ ) and the model in Section 3 ( $P_{cr1}$ ), the effect of axial deformation may be evaluated.

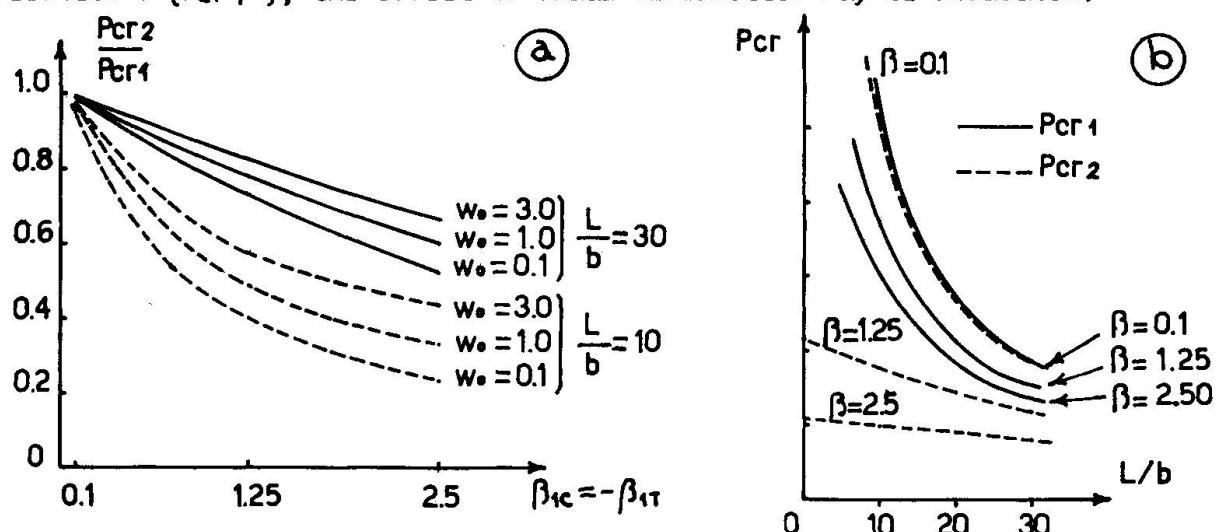


FIG.8: COMPARISON BETWEEN COLUMN MODELS

In Fig.8-a we observe that the influence of axial deformation increases with the nonlinearity coefficient  $\beta_{1c}$ . The influence of the initial eccentricity  $w_0$

and the slenderness ratio  $L/b$  is also shown. In Fig.8-b we may see how the critical loads for both models depend on  $\beta_{1c}$ ,  $w_0$  and  $L/b$ .

#### ACKNOWLEDGEMENT

The work reported in this paper has been supported by the Research Council of the University of Rosario. The help received from the Computer Center staff is deeply acknowledged.

#### REFERENCES

1. Distefano, J.N.: CREEP BUCKLING OF SLENDER COLUMNS, Journal, Struct. Div., ASCE, Vol. 91, No. ST3, June 1965.
2. Warner, R. F. : PHYSICAL MATHEMATICAL MODELS AND THEORETICAL CONSIDERATIONS, Introductory Report, Symposium IABSE, Québec, 1974.
3. Helman, H. and Creus, G.J.: A NONLINEAR RHEOLOGICAL MODEL DESCRIBING TIME DEPENDENT DEFORMATIONS AND FAILURE. Int. Report IMAE, 1973.
4. Rüsch, H.: RESEARCHES TOWARD A GENERAL FLEXURAL THEORY FOR STRUCTURAL CONCRETE, ACI Journal, Proceedings, Vol.57, July 1960.
5. Distefano, J.N. and Creus, G. J.: CREEP BUCKLING OF REINFORCED CONCRETE COLUMNS (Discussion), Journal, Struct. Div. ASCE, Vol.90, No. ST3 April 1964.
6. Creus, G. J.: CREEP BUCKLING OF CONCRETE COLUMNS. SOME THEORETICAL AND EXPERIMENTAL RESULTS, International Symposium RILEM, Argentina, 1971.

#### SUMMARY

The effect of nonlinear behaviour on creep buckling is analized, using a nonlinear rheological element to express material properties and simplified models for the column.

#### RESUME

On analyse l'influence du comportement non-linéaire sur le flambement dû au fluage en utilisant un élément non-linéaire pour exprimer les caractéristiques du matériau, ainsi que des modèles simplifiés pour la colonne.

#### ZUSAMMENFASSUNG

Unter Verwendung eines nichtlinearen rheologischen Elementes für die Beschreibung der Materialeigenschaften und eines vereinfachten Modells für die Stütze wird die Wirkung des nichtlinearen Verhaltens auf das Kriechknicken untersucht.