

**Zeitschrift:** IABSE reports of the working commissions = Rapports des commissions de travail AIPC = IVBH Berichte der Arbeitskommissionen

**Band:** 19 (1974)

**Rubrik:** Complementary reports

### **Nutzungsbedingungen**

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

### **Conditions d'utilisation**

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

### **Terms of use**

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

**Download PDF:** 20.08.2025

**ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>**

Rapports complémentaires  
Ergänzende Berichte  
Complementary Report

II-2 Prof. E. FUMAGALLI

Monsieur le Président, Mesdames et Messieurs, en tenant compte que mon rapport est déjà à vos mains, pour mieux documenter l'activité de l'ISMES dans le domaine des modèles de conténiteurs nucléaires en précontraint, je me permets d'utiliser le temps à disposition pour vous proposer la projection d'un bref documentaire relatif à deux modèles récemment essayés à l'ISMES. A ce sujet je donne la parole à M. Verdelli qui a suivi personnellement l'exécution et les essais des modèles susdits.

II-2 Mr. G. VERDELLI

A short film is shown to illustrate the tests dealt with in Report II-2 more effectively; it summarizes the most interesting aspects of the construction and the tests carried out at ISMES during the last year on thin models in the scale 1 : 20. The film is divided into two parts. The first part shows the most important construction stages and the tests carried out on thin model no. 2 (see paper). The collapse of this model occurred at a pressure of  $120 \text{ Kg/cm}^2$  with the breaking of a large number of the hoop cables of the barrel. The second part of the film has no commentary and illustrates the ultimate tests carried out in successive stages on thin model no. 3 described in detail in the report in question and only recently finished. In the initial stage of the ultimate tests the maximum pressure reached was  $90 \text{ Kg/cm}^2$  corresponding to the first clearly visible cracks which concerned the central part of the barrel. In the two overpressure tests up to  $115 \text{ Kg/cm}^2$  which were later carried out, although there were an increased number of cracks (limited however to the central part of the barrel) the elastic behaviour of the prestressing cables was still evident. Final collapse, at  $140 \text{ Kg/cm}^2$ , occurred with the collapse of the central part of the upper slab. This type of unexpected collapse is caused by the yield of the wires of the slab hoop cables, the diameter - in this third model - not having been increased as were the wires in the other cable systems.

II-3 Ing. R. RICCIONI

Mr. Chairman, Ladies and Gentlemen; I trust you will allow me to apologize not only for myself but also on behalf of Prof. Fanelli and Dr. Robutti for the delay in presenting our paper. A delay hardly justified by the fact of our being in an own house here, but perhaps excusable on account of our work, based on numerical methods, is only a simple chess piece, dependent on the other pieces in the game - that is to say - the project, the available information of the physical model and the specified rheological input.

The substance of our work is not only a verification of the structure of a nuclear vessel with finite element method - as it would seem to appear at first sight - but is infact an exact indication of the necessity and possibility of complementarity for those involved in the designing, verification of physical and numerical modelling, as well as for those who provide information on rheological behaviour of materials.

In our case the information obtained from the physical model suggested an investigation in the elastic linear field and has allowed an evaluation of the elastic modulus of concrete. The results of tests carried out on samples of concrete of the same type as that used in the physical model - elaborated with the mathematical one - allowed evaluation of the elastic modulus by other means. The compatibility between the figures obtained through completely different methods was morethansatisfactory.

The determination of the optimum prestressing sequence of cables and of local safety factors, complete the picture of information available and confirm a "modus operandi" which must be considered fundamental for structures, such as nuclear vessels, whose safety must not be in doubt.

#### II - 4 Dr. F.K. GARAS

I must apologize for not giving the participants enough time to read my paper, but if you work for a commercial organization you will realize it is not always easy to find time to write papers. However, I will try in the next few minutes to highlight some of the key points mentioned in the paper. The paper deals mainly with the problem of high shear stresses which have to be accommodated in the design of prestressed concrete pressure vessels as shown in figure 1 of the paper. This shows a section through the Hartlepool/Heysham podded boiler type pressure vessel. There are four vessels of this design under construction at present in the U.K.

Pressure vessels for the containment of nuclear reactors include structural members which rely for their safety on the capacity of concrete to resist high shear stresses. Typical examples are end slabs, the barrel wall and boiler closures. These members are geometrically deep in relation to their span and subject to flexure, but the large deformations which would normally be induced are restricted by lateral restraint in the form of either prestressing or the continuity of the structure around the element considered. The first part of the paper is a summary of an experimental investigation into circular end slabs. Figure 7 in the paper shows the type of model which was used. To date we have tested 23 models to failure. They varied in scale between 1/24th and 1/8th scale. The parameters studied included the amount of hoop prestress, bonded reinforcement, span to depth ratio, boundary conditions, penetration liners, sustained temperature and concrete strength.

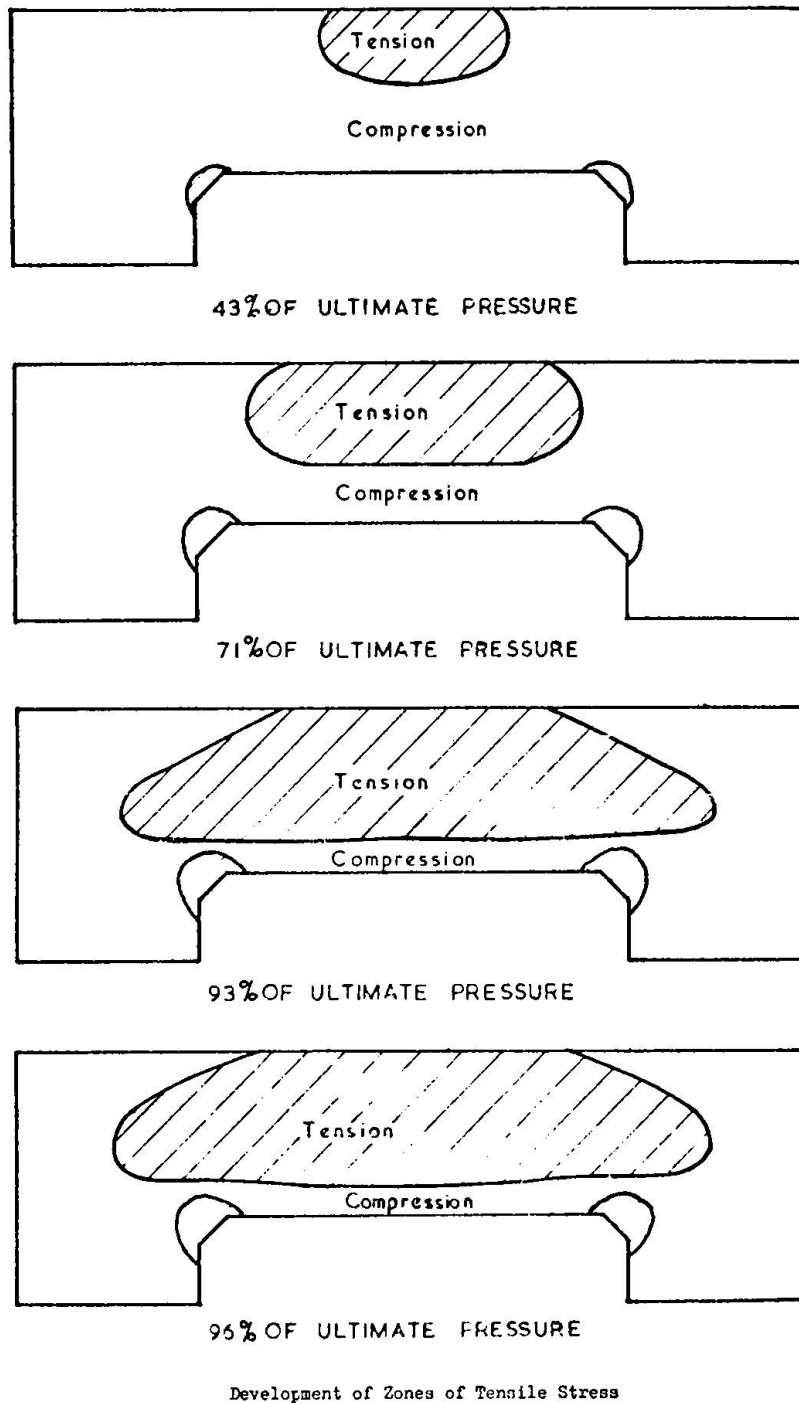
Figure 6 in the paper shows the general behaviour of a typical model. Here we plotted the percentage of ultimate pressure versus the percentage of maximum central deflection. The flexural behaviour can be divided into three stages. The first, the elastic stage, was determined by the pressure at which the first crack occurred, the next stage, elastoplastic, where boundary reinforcement started to yield and we got higher deflections and the last stage is the plastic stage. This behaviour was overcome by a shear type failure which is shown in Figure 7 in the paper. This is a typical failure in which a shear plug is formed with the exit of the plug determined by the position of the vertical prestress. The angle of shear plane was found to be determined by the span to depth ratio and the amount of hoop prestress.

In analysing the behaviour of end slabs we found that the ultimate shear strength was influenced by three components (figure 3 in the paper) - the compression zone, the small zone at the bottom, the aggregate interlock - which most people ignore in their analyses - and the third one, whose contribution is fairly small, the dowel action of the rebar.

In the end slab models a large number of internal and surface strain measurements were taken during the various stages of the tests and Slide 1 gives typical results. The slide shows the development of the compressive and tensile zones as the pressure is increased. It can be seen that the reduction in depth of the compression zone can be determined from slab measurements. The first figure shows the stress distribution at 43% of the ultimate pressure. Although high tensile stresses of the order of 3000 microstrain were developed at the outer surface of the model it was still considered elastic. Figure 4 in the paper shows how the depth of the compression zone was reduced as the pressure was increased up to about 95% of the ultimate pressure. Prior to ultimate, the depth of the compression zone varied between 10 and 15% of the total depth depending on the type of model tested.

To give an idea of the breakdown of the total shear force between the three components previously mentioned, the compression zone represents about 45% of the total shear force, aggregate interlock as much as 50% and dowel action about 2 to 3%.

In the paper, an empirical expression is given which predicts the results of our experimental work and most of the published data. This is shown on page 5.

SLIDE 1

The second part of the paper describes part of the development work carried out on the boiler closures for the Hartlepool and Heysham vessels. In each vessel there are 8 boiler pods, having a corresponding number of closures. Figure 2 in the paper shows the arrangement and various details. The paper describes the design philosophy behind these components.

To support the development of the design, models of 2 different scales were tested. Firstly 60 No. 1/10th scale models were tested and these were used to optimise on the design parameters and to examine their likely effects on the operational and overload behaviour. Figure 8 in the paper shows the test arrangement of the small scale models. The test programme is described in the paper. A typical mode of failure is shown in figure 10 in the paper. One of the significant results of the tests was the difference between the contribution of the active and passive restraint. This is one of the parameters which was examined and some of the models were tested with active and some with passive restraint. Figure 9 in the paper shows that the ultimate shear strength was 50% higher in the case of models with active prestress.

The results obtained from the 1/10th scale models were used in the final design of the closure but as a confirmatory measure 4 No. 1/3rd scale models were tested to examine the short and long term behaviour, using the test arrangement shown in figure 11 in the paper. The models were initially prestressed down and most of the components were scaled accurately. We used a hydrostatic pressure loading system. The test programme is described in Table 2 of the paper. M1 and M2 were tested in the short term at ambient temperature with passive and active prestress, respectively. In model M3, elevated temperature was sustained for a period of 9 months and M4 was temperature and load-cycled. Figure 15 shows a comparison between the measured and predicted hoop, creep strains for model M3 using a prediction based on Dr. Browne's work on the specific strain data for the Hartlepool concrete. Finally it is worth noting that generally there was good correlation between the behaviour of the two scales of model.