

# Quantitative analysis of psychological response against vibration in bridge design

Autor(en): **Nishiwaki, Takeo / Hoshiya, Masaru**

Objekttyp: **Article**

Zeitschrift: **IABSE reports of the working commissions = Rapports des commissions de travail AIPC = IVBH Berichte der Arbeitskommissionen**

Band (Jahr): **22 (1975)**

PDF erstellt am: **30.04.2024**

Persistenter Link: <https://doi.org/10.5169/seals-19384>

## **Nutzungsbedingungen**

Die ETH-Bibliothek ist Anbieterin der digitalisierten Zeitschriften. Sie besitzt keine Urheberrechte an den Inhalten der Zeitschriften. Die Rechte liegen in der Regel bei den Herausgebern.

Die auf der Plattform e-periodica veröffentlichten Dokumente stehen für nicht-kommerzielle Zwecke in Lehre und Forschung sowie für die private Nutzung frei zur Verfügung. Einzelne Dateien oder Ausdrucke aus diesem Angebot können zusammen mit diesen Nutzungsbedingungen und den korrekten Herkunftsbezeichnungen weitergegeben werden.

Das Veröffentlichen von Bildern in Print- und Online-Publikationen ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. Die systematische Speicherung von Teilen des elektronischen Angebots auf anderen Servern bedarf ebenfalls des schriftlichen Einverständnisses der Rechteinhaber.

## **Haftungsausschluss**

Alle Angaben erfolgen ohne Gewähr für Vollständigkeit oder Richtigkeit. Es wird keine Haftung übernommen für Schäden durch die Verwendung von Informationen aus diesem Online-Angebot oder durch das Fehlen von Informationen. Dies gilt auch für Inhalte Dritter, die über dieses Angebot zugänglich sind.

## III

**Quantitative Analysis of Psychological Response Against Vibration in Bridge Design**

Influence de la réaction psychologique à la vibration, dans le projet de ponts

Einfluß der psychologischen Reaktion gegen Schwingungen im Entwurf von Brücken

**Takeo NISHIWAKI**

Professor

**Masaru HOSHIYA**

Associate Professor

Musashi Institute of Technology  
Tokyo/Japan

Structural serviceability is considered as a very important factor in modern design concept of bridge and building structures.

It is reported that, although it may be a rare example, an old man on a foot bridge encountered an impediment in walking against the unpleasantness produced by the bridge vibration. In the United States, inhabitants in a tall building often complains of the unpleasantness against wind induced vibrations (1).

Pedestrians on a bridge or inhabitants in a tall building recognize the vibrations as unpleasantness, when the vibration intensity is beyond a certain level, whereas they are not affected by the vibration if it is weak.

This unpleasantness is to be considered as a sort of emotional response which causes a motivation to action. In other words, unpleasantness is associated with human consciousness which is not governed only by vibration magnitude or psychological scale measured by means of experimentally obtained physical quantity.

Modern bridges or buildings should not be designed on the basis of only mechanical responses against physical actions and excitations. Human emotions or their subjective responses should be also integrated on the design.

In this direction, first of all, the psychological scale must be clearly specified. Generally it is the practice to take subjective responses of testees on a simplified model structure in a laboratory in order to estimate the psychological scale. The nonlinear relationship between the physical and the psychological quantities are thereafter plotted on proportional scale.

In the following paragraphs, are presented some observations and discussions on human responses against foot bridge vibration, in which both Miwa's (2) and Kobori's (3) psychological scales are employed. It is noted that although the both scales are based on an almost identical experiment, the results are summarized in different fashions with respect to frequency domains, equal sensation curves and the treatment of compounded vibrations. Consequently the both scales are not necessarily propotional.

In order to establish the functional relationship between the emotional responses of pedestrians on foot bridges and the corresponding psychological scale, field surveying of human responses was performed for pedestrians on twenty three foot bridges during time period from 8 A.M. to 5 P.M. in Tokyo. At the same time, recorded was the vertical vibrations at the center point of each bridge. Fig. 1 shows a part of measured values in the psychological scale for some measured bridges. In this study, the category of emotion was specified into five ranges as shown in Table 1, and parameters such as sex, profession, group and so on are taken as the factors against emotion.

A part of the results of analyses based on the questionnaires to users is given in Fig. 2. It is found that even identical vibration affects quite differently upon the subjective responses of pedestrians who are standing and of pedestrians who are walking. Pedestrians who are standing on a bridge recognize the vibration sharper than those who are walking.


Table 1 Category of Perceptions

1	Imperceptible
2	Barely perceptible
3	Distinctly perceptible
4	Strongly perceptible
5	Severe

Table 2 Vibration Greatness

Emotion Factor		Imperceptible	Barely Imperceptible
Standing		0.10	0.13
Walking			
	Men	0.32	0.35
	Women	0.31	0.32
	Businessmen	0.30	0.38
	Laborers	0.37	0.40
	Students	0.32	0.34
	Housewives	0.25	0.28
	Children	0.36	0.27
	Single	0.33	0.37
	Talking	0.39	0.31
	Group		
	Not talking	0.30	0.26
	Business	0.33	0.37
	Shopping	0.27	0.27
	Walking	0.26	0.20
	Miscellaneous	0.32	0.34

Fig. 1 Measured Vibration Greatness

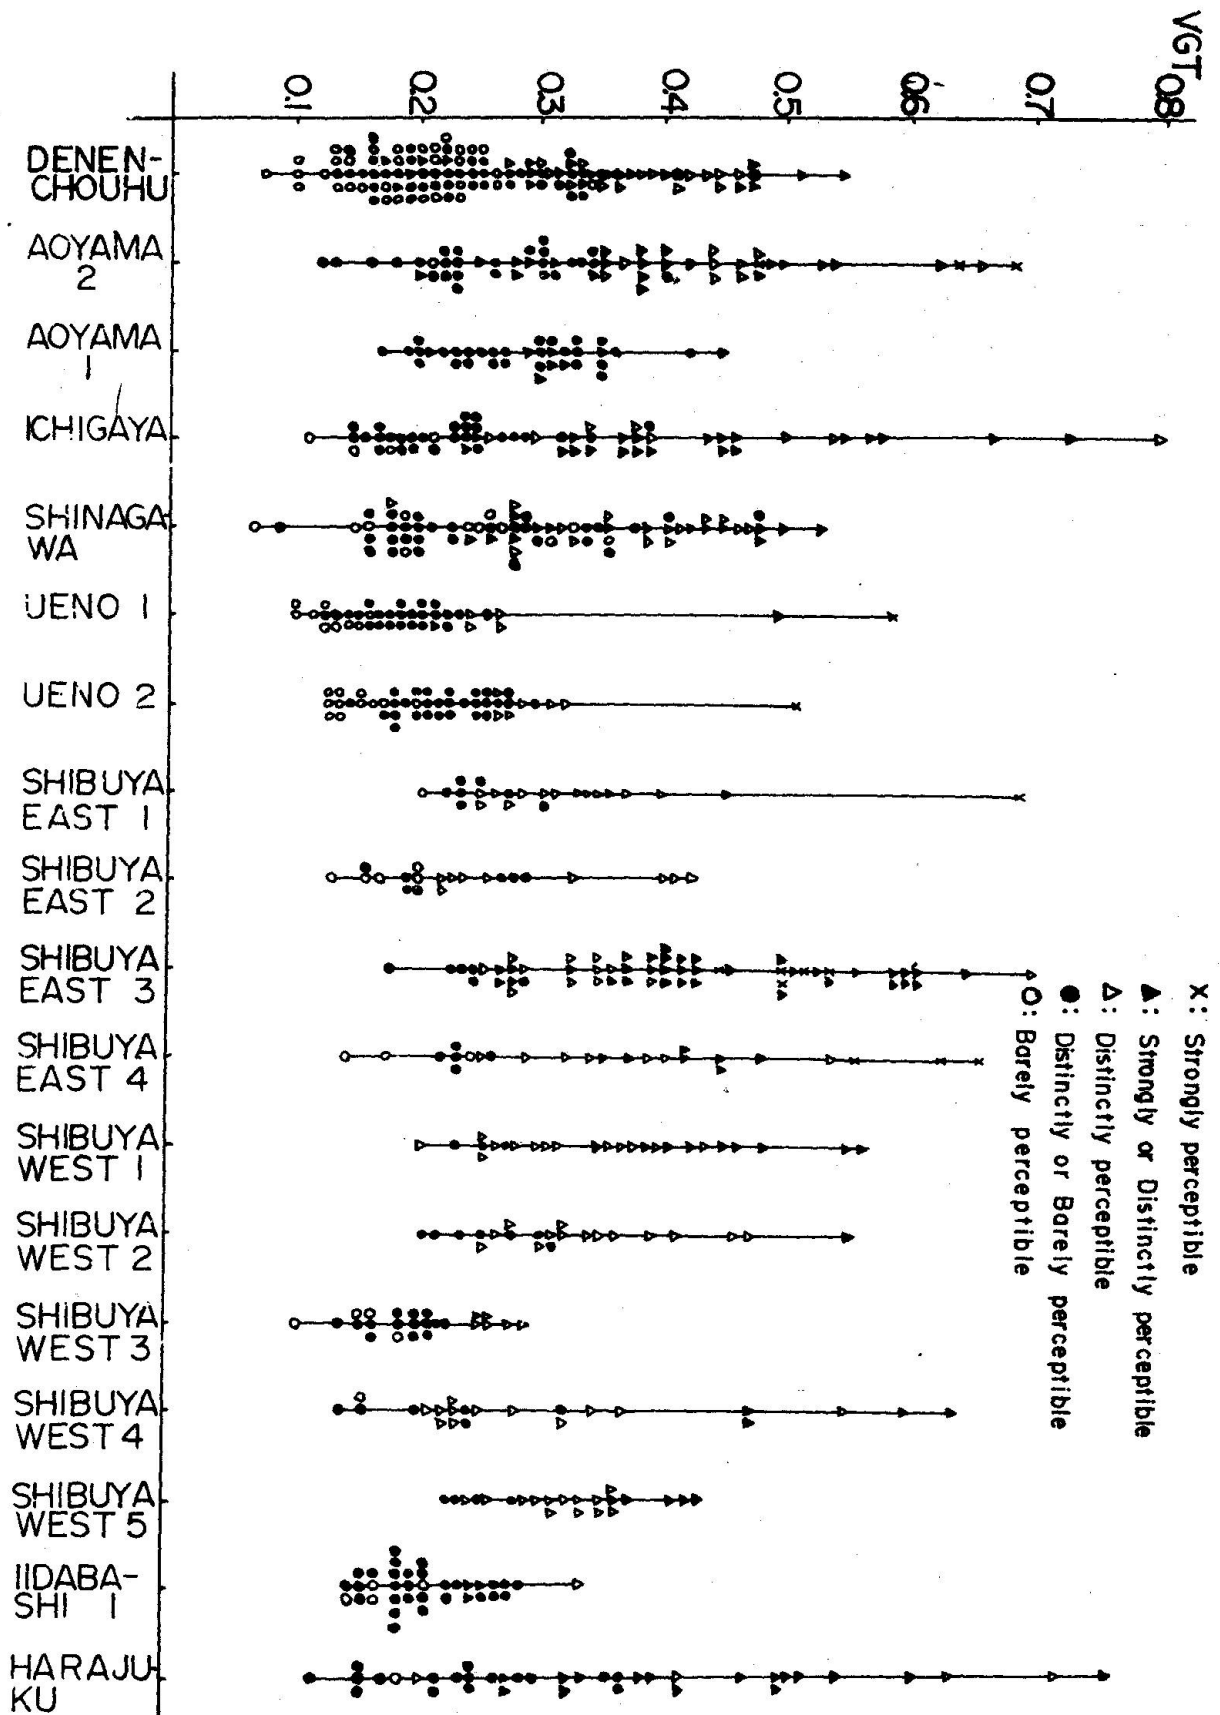

It is found that there were few cases in which pedestrians had realized the vibration after they were questioned, although they did not feel any shake while walking. Table 2 shows the values of psychological greatness corresponding to the value 50 % of cumulative distribution curves for emotions of pedestrians on foot bridges. The following observations can be made through the surveying.

For the imperceptible emotion, walking persons feel the vibration three or four times greater than when standing, whereas for the barely perceptible emotion, it becomes as two or three times great as in simply standing. It is also observed that the vibration greatness of imperceptible emotion in office area is recognized to fall into the barely perceptible emotion in residential area.

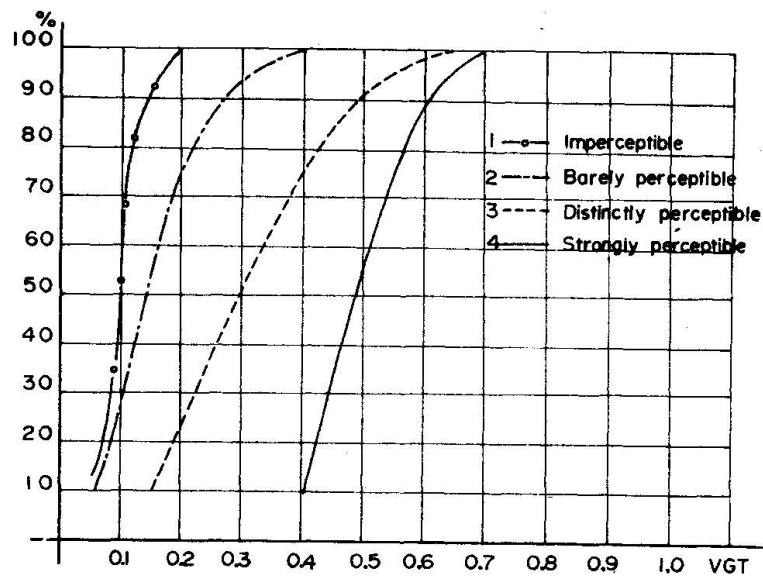


Fig.2-A Standing

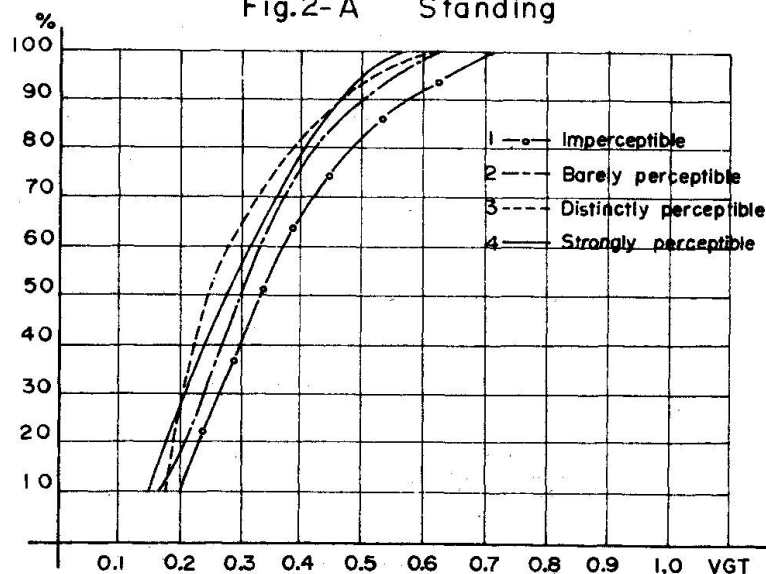


Fig.2-B Walking

Cumulative distribution curves for Emotions of Pedestrians on Foot-bridges

The algebraic average of the values of the imperceptible emotion in Table 2 turned out to be 0.3. The ratio of the numbers of vibration greatness which have, for example, the values less than 0.3 is analyzed against the total observations for each parameter  $gEI/wl^4$ . Then the ratio is plotted against  $gEI/wl^4$  in Fig. 3. The curve of vibration greatness can be shown in the different manner. Fig. 4 shows that the curve of vibration greatness against predominant frequency has an upper bound and an lower bound. Most of foot bridges will be fallen into their ranges.

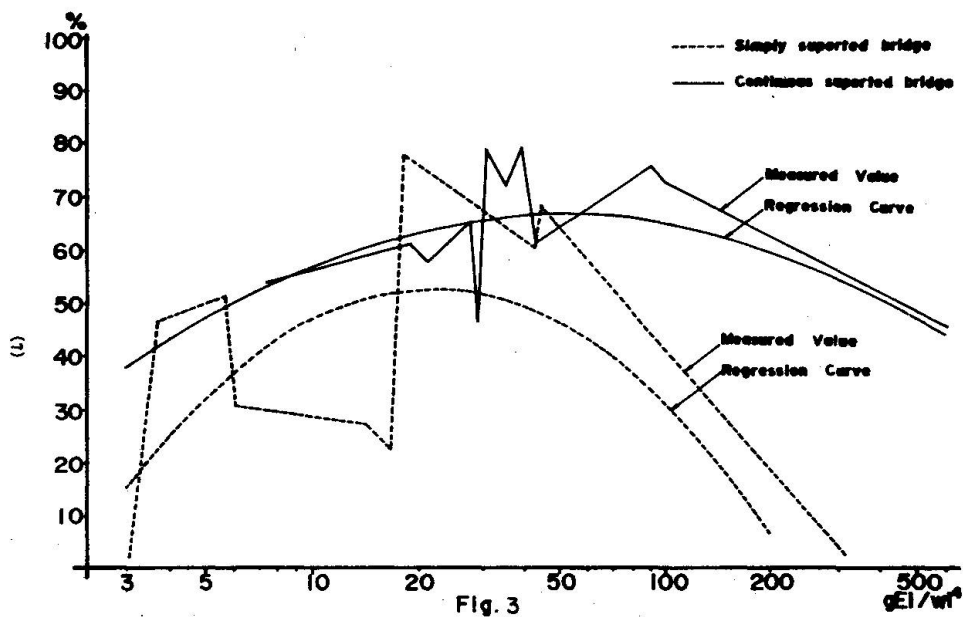


Fig. 3 Probability curve that pedestrians feel such that vibrational greatness is greater than 0.3.

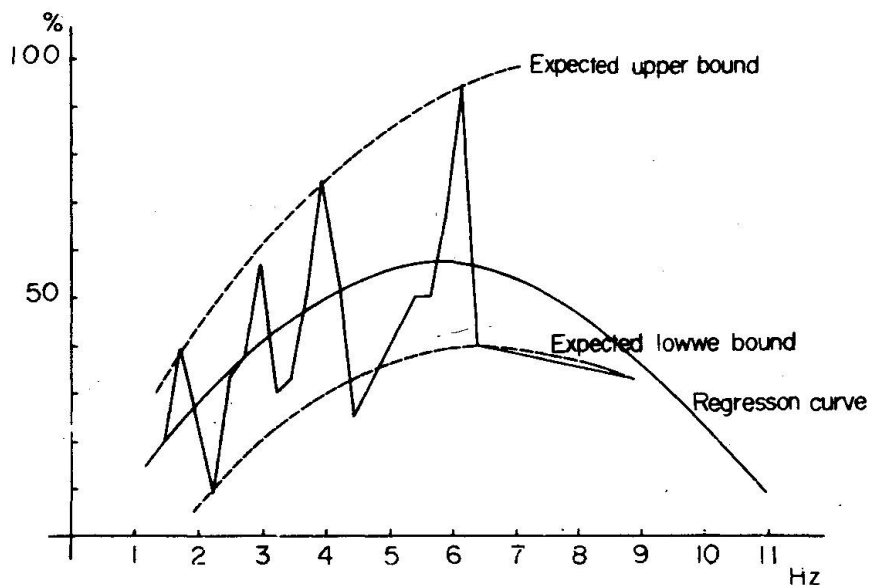


Fig. 4 Probability curve that pedestrians feel such that vibrational greatness is greater than 0.3

By making use of Fig. 3 or Fig. 4, the structural parameter can be properly chosen such that probability that at least half of pedestrians feel the vibration can be put below a prescribed level.

On the basis of the aforementioned study, human responses against bridge vibration can be integrated into the decision of the structural design parameter.

#### REFERENCES

- (1) Chang, Fu-Kuei, "Human Response to Motion in Tall Buildings", Journal of the Structural Division, ASCE, ST-6, June 1973, pp. 1259 - 1273
- Hansen, R.J., Reed, J.W. and Vanmarcke, E.H., "Human Response to Wind-Induced Motion of Buildings", Journal of the Structural Division, ASCE, ST-7, July 1973, pp. 1589 - 1605
- (2) Miwa, T., "Evaluation Method for Compound Sinusoidal and Random Vibrations", Journal of the Japan Acoustic Society, Vol. 27, No. 1, 1971, pp. 21 - 31
- (3) Kobori, T. and Kajikawa, Y., "Ergonomic Evaluation Methods for Bridge Vibrations", Proceeding of the Japan Society of Civil Engineers, No. 230, November 1974, pp. 23 - 31

#### SUMMARY

Psychological responses of pedestrians on foot bridge vibration are measured and discussed. Then, structural serviceability is emphasized as one of the criteria in the decision of structural design parameters.

#### RESUME

On a calculé et commenté les réactions psychologiques des piétons à la vibration d'une passerelle. C'est ainsi que la serviciabilité est considérée comme un des critères de choix des paramètres du projet.

#### ZUSAMMENFASSUNG

Die psychologischen Reaktionen der Fussgänger auf Fussgängerbrücken wurden gemessen und diskutiert. Sodann wird die Nutzung als eines der Kriterien bei der Wahl der Entwurfsparameter hervorgehoben.