**Zeitschrift:** IABSE reports of the working commissions = Rapports des

commissions de travail AIPC = IVBH Berichte der Arbeitskommissionen

**Band:** 23 (1975)

**Artikel:** Load factor design of columns using second moment probabilistic

method

**Autor:** Galambos, Theodore V.

**DOI:** https://doi.org/10.5169/seals-19825

## Nutzungsbedingungen

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. Mehr erfahren

## **Conditions d'utilisation**

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. En savoir plus

# Terms of use

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. Find out more

**Download PDF: 22.10.2025** 

ETH-Bibliothek Zürich, E-Periodica, https://www.e-periodica.ch

# LOAD FACTOR DESIGN OF COLUMNS USING SECOND MOMENT PROBABILISTIC METHOD

Theodore V. Galambos
Professor of Civil Engineering, Washington University
St. Louis, Mo. USA
Chairman, Column Research Council, USA

#### ABSTRACT

A method of steel column design is presented which is based on first order probabilistic theory, utilizing only the mean values and the coefficients of variation of the relevant parameters. A reliability factor, called the "safety index" is defined and a value for it is obtained by calibration to an existing design code. Subsequently a design format

$$\emptyset R_n \ge \gamma Q_n$$

is developed, where  $\emptyset$  is a strength factor, R  $_{n}$  is the nominal resistance,  $\gamma$  is a load factor and Q  $_{n}$  is the nominal load effect.

#### 1. INTRODUCTION

This report will outline a simplified method of steel column design based on the "first order" or "second moment" probabilistic theory (1,2,3). In the interest of simplicity it will be assumed that the resistance R of the column is independent of the load effect Q. Both R and Q are random functions, and thus the probability of failure can be expressed by either of the following expressions.

$$P_{_{\mathbf{F}}} = P[(\mathbf{R} - \mathbf{Q}) < 0] \tag{1}$$

$$P_{F} = P[R/Q < 1]$$
 (2)

$$P_{F} = P[\ln (R/Q) < 0]$$
 (3)

If we consider the "standardized variate"

$$U = \frac{\ln (R/Q) - [\ln (R/Q)]_{m}}{\sigma_{\ln (R/Q)}}$$
(4)

in which  $[\ln (R/Q)]_m$  and  $\sigma_{\ln (R/Q)}$  are the mean and standard deviation of the natural logarithm of the ratio R/Q, then

$$P_{F} = P \left[ U < \frac{-\left[ \ln \left( R/Q \right) \right]_{m}}{\sigma_{\ln \left( R/Q \right)}} \right] = F_{U} \left\{ \frac{-\left[ \ln \left( R/Q \right) \right]_{m}}{\sigma_{\ln \left( R/Q \right)}} \right\}$$
 (5)

in which F is the cumulative distribution function of this standardized variate. The quantity [ln (R/Q)] /  $\sigma_{ln}$  (R/Q) defines the reliability of

the element; hence it is called the "safety index," denoted by  $\beta$ . For example, if the random variable R/Q is lognormally distributed, then the area under the tail R/Q < 1 i.e., the probability of failure, is 3.2 x 10 if  $\beta$  = 4. Similarly, the failure probabilities are 2.3 x 10-2, 1.4 x 10-3 and 2.9 x 10-6 for  $\beta$  = 2, 3 and 5, respectively. The values of  $\beta$  can be quite different if the shape of the distribution of R/Q in the tail is different. In practice, the probability distribution of R/Q is unknown and only R<sub>m</sub>, Q<sub>m</sub>,  $\sigma_R$  and  $\sigma_Q$  are estimated. However,  $\beta$  still indicates, in an

approximate way, the failure probability, and an increase or a decrease of  $\beta$  by unity roughly decreases or increases the probability of failure by an order of magnitude (i.e.,  $10^{-1}$ ). If the distribution of R/Q were lognormal or any of a number of other commonly used distributions (e.g. Extreme Value Type I),  $\beta$  would directly indicate a value of the probability of failure. In the first order probabilistic design method used here,  $\beta$  is only a relative measure of reliability, and it is hence called the "safety index." Within the context of the information available, i.e., just  $R_{\rm m}$ ,  $Q_{\rm m}$ ,  $\sigma_{\rm R}$  and

 $\sigma_Q$ , a constant value of  $\beta$  effectively approximates constant reliability for all similar structural elements.

The expression for the safety index B, i.e.,

$$\beta = \frac{\left[\ln \left(R/Q\right)\right]_{m}}{\sigma_{\ln \left(R/Q\right)}} \tag{6}$$

can be simplified by using first order probability theory as follows:

$$[\ln (R/Q)]_{m} \simeq \ln (R/Q)_{m} \simeq \ln \frac{R_{m}}{Q_{m}}$$
 (7)

and

$$\sigma_{\ell n (R/Q)}^{2} = \left[ \frac{\partial \ell n (R/Q)}{\partial R} \right]_{m}^{2} \sigma_{R}^{2} + \left[ \frac{\partial \ell n (R/Q)}{\partial Q} \right]_{m}^{2} \sigma_{Q}^{2} = \frac{\sigma_{R}}{R_{m}} + \frac{\sigma_{Q}}{Q_{m}}$$
(8)

Since  $\sigma_R/R_m = V_R$  and  $\sigma_Q/Q_m = V_Q$ , where  $V_R$  and  $V_Q$  are the coefficients of variation of R and Q, respectively,

$$\beta \simeq \frac{\ln \left(R_{\rm m}/Q_{\rm m}\right)}{\sqrt{V_{\rm R}^2 + V_{\rm Q}^2}} \tag{9}$$

or.

$$\frac{R_{m}}{Q_{m}} = \theta = \exp \left(\beta \sqrt{V_{R}^{2} + V_{Q}^{2}}\right) \tag{10}$$

In Eq. 10, 0 is the "central safety factor."

ESTIMATION OF THE SAFETY INDEX 8

The "safety index" & is related to the probability of failure. In order to develop a design criterion, 8 must be specified. There are several ways in which & can be determined: it can be a value agreed upon by the profession to give the desired degree of reliability, or it can be obtained by adjusting  $\beta$  such that the same degree of reliability is attained for the new criterion as in the existing design method for a given standard situation. This procedure is called "calibration," and it will be used here. The "standard situation" selected here is the design of an interior column in a braced frame with simple beam-to-column connections according to Part 2 of the "Specification for The Design, Fabrication and Erection of Structural Steel For Buildings," American Institute of Steel Construction (AISC), 1969. According to this specification the columns are designed to resist the axial load as axially loaded elements with an effective length equal to the center-to-center story height. The factored axial load on an interior column in a braced frame in the nth floor below the top of the frame (counting the roof as level n = 1) is approximately equal to

$$P_{n} = [D_{c} An + L'_{c} (1-RF) An] LF$$
 (11)

where

LF = Load Factor; LF = 1.70

D = dead load intensity

L<sub>c</sub> = live load intensity specified in the code for the occupancy type

= area on any floor level contributing to the load on

the column

RF = live load reduction factor specified in the code

Equation 11 assumes that the weight of the columns is included in the dead load, that the loads on the top level (roof) are the same as for the other levels, and that L, D and A are the same at every level. Thus a regularly loaded regular structure is assumed. It is stipulated that columns in such a structure are satisfactory when designed by the present code.

The live load reduction factor RF is, according to A58.1 (1972) of the American National Standards Institute (ANSI) Code, a function of the total

tributary area and the ratio D/L. The maximum reduction is RF = 0.6 if the total tributary area is more than 750 sq. ft. (70 sq. in.), or RF = 0.23 (1 +  $D_c/L_c$ ), whichever is smaller.

The column capacity is equal to (AISC 1969, Part 2) 1.7 A F , where A is the cross-sectional area of the column and F is the allowable stress

$$F_{a} = \frac{F_{y} (1 - 0.25 \lambda^{2})}{5/3 + 3/8 (\lambda //2) - 1/8 (\lambda //2)}$$
(12)

Equation 12 is the Column Research Council Basic Column Curve Equation in the numerator, divided by a factor of safety. It is valid for  $\lambda \leq \sqrt{2}$ ; F is the yield stress and

$$\lambda = \frac{h}{r} \sqrt{\frac{F_y}{\pi}} \tag{13}$$

where h/r is the column slenderness ratio and E is the modulus of elasticity.

By setting 1.7 A  $_{\rm c}$  F  $_{\rm a}$  = P  $_{\rm n}$ , the required column area according to the AISC Specification is:

$$A_{c} = \frac{nA \left[D_{c} + L_{c} (1-RF)\right] \left[5/3 + 3/8 \left(\lambda //2\right) - 1/8 \left(\lambda //2\right)^{3}\right]}{F_{y} (1 - 0.25 \lambda^{3})}$$
(14)

In the following derivation  $\beta$  will be determined such that the column area A from Eq. 14 serves as the basis of the calibration for the new format.

In order to evaluate  $\beta$  from Eq. 9 it is necessary to estimate the mean and the coefficient of variation of the resistance,  $R_m$  and  $V_R$ , and the corresponding values of the load effect,  $Q_m$  and  $V_Q$ . The mean strength of the column is equal to

$$R_{\rm m} = A_{\rm c} F_{\rm m} \tag{15}$$

where A is the column area required according to the present code and F is the mean stress at failure. This stress is a function of a number of variables, such as the yield stress, the residual stress, the shape, the initial crookedness, the unintentional eccentricity of the axial load, and the end restraints. Each of these variables is random, and an analysis could be made if the relevant statistical parameters of each were known. This would be a formidable task if all these effects were included, although analyses with some of the variables have been made (4,5,6,7). In order to circumvent this problem, the mean failure stress was expressed in the following way:

$$F_m = [Bias Factor] [Nominal Formula]$$
 (16)

where

[Bias Factor] = 
$$\left[\frac{\text{Test capacity}}{\text{Theoretical prediction}}\right]_{m} \left[\frac{\text{Theoretical prediction}}{\text{Nominal strength}}\right]_{m}$$
 (17)

and the nominal formula is the column strength equation which is to be used in the new code for the particular type of column section. For the sake of

demonstration and because the formula fits fairly well for medium size rolled columns, the CRC Basic Column Curve was chosen, i.e.,

$$F_n = F_y (1 - 0.25 \lambda^2)$$
 (18)

Since the theoretical prediction of column strength, including all effects, is fairly complicated and all the necessary data were not available to make the analysis, it was decided to determine the bias factor by directly comparing test results to predictions from the nominal formula.

In order to assess the mean and standard deviation of the test-to-prediction ratio, test data from reports of the Fritz Engineering Laboratory of Lehigh University were analyzed (8,9). These samples are not truly random because the tests were not designed statistically, and so a better basis, involving the omitted step of the theoretical prediction, or statistically designed tests, will eventually have to be used. The sample used here includes about 50 US rolled medium size column shapes and the bias factor for these was found to be equal to 1.03 and the corresponding coefficient of variation was 0.14 (9). The test-to-prediction ratio was determined for the nominal yield stress and so the numbers above account also for the variability of the yield stress.

The mean column resistance is thus equal to

$$R_{\rm m} = 1.03 A_{\rm c} F_{\rm y} (1 - 0.25 \lambda^{3})$$
 (19)

$$V_{R} = \sqrt{V_{Bias}^{2} + V_{Fabrication}^{2}} = \sqrt{0.14 + 0.05} = 0.15$$
 (20)

The coefficient of variation due to fabrication represents an estimate of dimensional variations of the column cross sections.

The mean load effect is the mean load on the column, and it is equal to

$$Q_{m} = E_{m} An \left[ D_{m} + L_{m} \right]$$
 (21)

where A and n are the tributary area and the story number, as defined earlier, E is a random variable which accounts for the structural analysis by which the idealized loads are translated into axial forces (E = 1.0 and  $V_E$  = 0.1 will be assumed in this analysis), and D L are the mean dead and the mean lifetime maximum live loads, respectively. In the ensuing derivations it will be assumed that

$$D_{\rm m} = D_{\rm c}$$
 and  $V_{\rm D} = 0.04$  (22)

$$L_{\rm m} = \frac{L_{\rm c} (1-RF)}{1 + K_{\rm L} \sqrt{V_{\rm E}^2 + V_{\rm L}^2}}$$
 (23)

and

$$V_{L} = \frac{C}{\sqrt{n}} \tag{24}$$

The coefficient of variation of the load effect is equal to

$$V_{Q}^{2} = V_{E}^{2} + \frac{(nA D_{m} V_{D})^{2} + (nA L_{m} V_{L})^{2}}{[nA (D_{m} + L_{m})]^{2}}$$
 (25)

Substitution and non-dimensionalization permits the determination of  $\beta$  from Eq. 9, and it is a function of A, n,  $\lambda$ ,  $V_R$ ,  $V_E$ , C,  $K_L$ ,  $V_D$ ,  $V_L$  and D/L. A numerical study was performed by varying these parameters as follows:

$$\begin{array}{l} 0.98 \leq \left[ \, \mathrm{Test/Prediction} \right]_{\mathrm{m}} & \leq \ 1.10 \\ 0.15 \leq V_{\mathrm{R}} \leq 0.20 \\ 0.1 \leq D_{\mathrm{c}}/L_{\mathrm{c}} \leq 10 \\ 0 \leq \mathrm{RF} \leq 0.6 \\ 0.25 \leq \lambda \leq 1.25 \\ 1 \leq K_{\mathrm{L}} \leq 3 \\ 0.05 \leq V_{\mathrm{E}} \leq 0.15 \\ 0.2 \leq C \leq 0.4 \\ 2 \leq n \leq 40 \\ 0.04 \leq V_{\mathrm{D}} \leq 0.1 \end{array}$$

These variations in the pertinent parameters defining  $\beta$  are thought to be larger than what one would expect for the structure for which calibration is being performed. The graphs in Figs. 1 and 2 give the variation of  $\beta$  with almost every one of the parameters, except for the effects of  $V_{R}$  and  $\left[\text{test/prediction}\right]_{m}$ . Since three values were changed at once, the results for these variations are best shown in tabular form:

$[test/prediction]_{m}^{*}$	λ	$\mathbf{v}_{\mathrm{R}}^{*}$	β
1.10	0.25	0.20	3.19
1.03	0.50	0.15	3.86
1.03	0.75	0.15	4.01
1.00	1.00	0.16	3.82
0.98	1.25	0.18	3.37

The values of  $\beta$  in this table were computed with D/L = 2; K<sub>L</sub> = 2; V<sub>E</sub> = 0.1; C = 0.25; n = 10; V<sub>D</sub> = 0.04. This table, as well as the curves in Figs. 1 and 2 show that  $\beta$  varies from about 3.2 to 4.5, depending on the values of the variables affecting the results. The coefficient of variation of the live load, V<sub>L</sub> = c/ $\sqrt{n}$ , the number of stories, and the code dead-to-live load ratio does not appear to result in much change in  $\beta$ , while the changes in the other variables have pronounced effects.

Based on this study a value of  $\beta$  = 4 is arbitrarily chosen as a reasonable and representative value of the reliability of medium size rolled wideflange columns in braced simple multi-story frames as designed by the 1969 AISC Specification. Arguments could, of course, be advanced that in some

Based on reasonable estimates, not test results.

cases the profession permits a lower reliability (say  $\beta$  = 3.2), or that in other cases it demands a higher reliability (say  $\beta$  = 4.5), but the choice of  $\beta$  = 4 is one which appears neither on the low nor on the high side, and it will be used hereafter in this report.

THE LOAD FACTOR DESIGN EQUATION

Once  $\beta$  is selected from the calibration process, the design equation can be written from Eq. 10 as:

$$\theta = R_{\rm m}/Q_{\rm m} \ge \exp \beta \sqrt{V_{\rm R}^2 + V_{\rm Q}^2}$$
 (26)

Unfortunately the resistance and the load effects are not separated in this equation. Separation is achieved by using an approach suggested by Lind (3), where an approximation

$$\theta_a = \exp \alpha_R \beta V_R \exp \alpha_Q \beta V_Q$$
 (27)

is introduced such that the error  $(\theta_a - \theta)/\theta$  is a minimum. If the extreme ranges  $2 \le \beta \le 5$ ,  $0.1 \le V_R \le 0.2$  and  $0.1 \le V_Q \le 0.5$  are used, the values of the  $\alpha$ 's become equal to

$$\alpha_{R} = 0.52$$

$$\alpha_{O} = 0.90$$

For the most unlikely combinations the error in  $\theta$  becomes approximately 16%; for most of the prevalent combinations the error is less than + 5%.

By the introduction of  $\alpha_R$  and  $\alpha_Q$  the separation between resistance and load effect is achieved very simply. Furthermore, the  $\alpha$ 's are independent of the other variables. Thus a design equation

$$\frac{R_{m}}{\exp \alpha_{R} \beta V_{R}} \ge Q_{m} \exp \alpha_{Q} \beta V_{Q}$$
 (28)

can be written. This equation can now be still further modified into the form

$$\theta R_{n} \ge \gamma Q_{n} \tag{29}$$

where R and Q are nominal load effects, and

$$\phi = \frac{R_{\rm m}}{R_{\rm n}} \exp \left(-\alpha_{\rm R} \beta V_{\rm R}\right) \tag{30}$$

and

$$\gamma = \frac{Q_{\rm m}}{Q_{\rm n}} \exp \alpha_{\rm Q} \beta V_{\rm Q} \tag{31}$$

For example, if  $\beta = 4$ ,  $\alpha_R = 0.52$ ,

$$R_{\rm m} = 1.03 \; F_{\rm y} \; (1 - 0.25 \; \lambda^2) \tag{32}$$

$$R_{n} = F_{v} (1 - 0.25 \lambda^{2})$$
 (33)

$$v_{R} = \sqrt{0.14 + 0.05} = 0.15 \tag{34}$$

$$\phi = 1.03 \exp (-0.52 \times 4 \times 0.15) \approx 0.75$$
 (35)

The nominal load effect is

$$Q_{n} = An \left[ D_{c} + L_{c} (1-RF) \right]$$
(36)

and the mean load effect is assumed to be

$$Q_{m} = An \left[ D_{m} + L_{m} \right]$$
 (37)

for an axially loaded column in a braced simple multi-story frame, then

$$\frac{Q_n}{Q_m} = \frac{D_c + L_c (1-RF)}{D_m + L_m}$$
 (38)

$$V_Q^2 = V_E^2 + \frac{(D_m V_D)^2 + (L_m V_L)^2}{(D_m + L_m)}$$
 (39)

If it is assumed that

$$D_{m} = D_{c}$$
,  $V_{D} = 0.04$  (40)

$$L_{\rm m} = \frac{L_{\rm c} (1-RF)}{1 + K_{\rm L} \sqrt{V_{\rm E}^2 + V_{\rm L}^2}}$$
(41)

$$K_{L} = 2$$
 and  $V_{L} = \frac{0.25}{\sqrt{n}}$  (42)

then  $\gamma$  can be computed from Eq. 31. Since  $\gamma$  appears not to vary a great deal with n and D/L (see Fig. 3), a single value of  $\gamma$  can be selected which is  $\gamma$  = 1.30.

The new design equation can then be expressed as follows:

$$0.75 \text{ F}_y (1 - 0.25 \, \text{h}^2) \ge 1.30 \text{ An} \left[D_c + L_c \, (1-\text{RF})\right]$$
 (43)

In case it is not desirable to use the same  $\gamma$  value, the load factor can always be determined from Eqs. 38 and 39 directly. This approach becomes necessary if dead and live load plus wind load is present in the load effect term. In this case

$$Q_{m} = c_{1} D_{m} + c_{2} L_{m} + c_{3} W_{m}$$
 (44)

$$V_{Q}^{2} = V_{E}^{2} + \frac{(c_{1} D_{m} V_{D})^{2} + (c_{2} L_{m} V_{L})^{2} + (c_{3} W_{m} V_{W})^{3}}{(c_{1} D_{m} + c_{2} L_{m} + c_{3} W_{m})^{2}}$$
(45)

where  $c_1$ ,  $c_2$ ,  $c_3$  are the deterministic coefficients from structural analysis, and W and V are the mean wind load intensity and the coefficient of variation of the wind load.

#### SUMMARY AND CONCLUSIONS

A simplified method of column design, based on the second moment or first-order probabilistic approach, has been presented. While the method lacks in the elegance of the more sophisticated probabilistic approaches, it is far advanced of the traditional approach of selecting a factor safety by concensus based on experience. The essential statistical and probabilistic elements are all present, and their relationship is simple enough to permit a rapid study of the outcome should one or several parameters change. The approach uses the data in about as sophisticated a form in which they are presently available. In fact, there are still many elements about which educated guesses must be made. The formulation is open-ended, permitting improvement as new or better data becomes available, and it allows an analysis of the consequences if one, two, or three different column curves are to be used. Furthermore, the level of reliability can also be adjusted by changing 8.

#### ACKNOWLE DGEMENT S

The work reported in this paper is part of a larger project dealing with load factor design criteria of steel building structures. This research is sponsored by the American Iron and Steel Institute. The work described was developed by a colleague of the author, Dr. M. K. Ravindra of Washington University. The manuscript was typed by Mrs. Alice Bletch.

## NOMENCLATURE:

```
Α
                   Tributary area in one story
                   Cross-sectional area of column
\mathbf{c}^{\mathbf{c}}
                    Coefficient in Eq. 24
c<sub>1</sub>,
                    Coefficients from structural analysis (Eqs. 44 and 45)
    c_2, c_3
                :
D<sub>C</sub>
                    Code-specified dead load intensity
                :
                   Mean dead load intensity
\mathbf{E}^{\mathbf{m}}
                   Modulus of elasticity
E
                   Random variable accounting for uncertainties in
                    structural analysis
E<sub>m</sub>
                   Mean of E
                   Allowable column stress
Fm Fy Lc LF
                  Mean column failure stress
                : Nominal column failure stress
                   Specified yield stress
                   Coefficient in Eq. 23
                :
                   Code-specified live load intensity
                :
                :
                   Mean lifetime maximum live load intensity
                   Load factor in current design code
                :
                   Load on column n-stories below roof level
Qn
Qn
Qn
R
                   Load effect
                   Mean load effect
                   Nominal load effect
                :
                :
                   Resistance
RF
                  Live load reduction factor
                : Mean resistance
```

: Nominal resistance R : Nominal resistance  $V_D^n, V_E, V_L, V_Q, V_R, V_W$  : Coefficients of variation of D, E, L, Q, R and W. respectively  $_{\mathbf{h}^{\mathbf{m}}}^{\mathbf{W}}$ : Mean wind load intensity : Story height : Number of stories below roof level n r Radius of gyration Coefficients in Eq. 28 Safety index YØ : Load factor : Resistance factor 0 : Central safety factor Non-dimensional slenderness parameter Standard Deviation of Q and R, respectively.  $\sigma_0$ ,  $\sigma_R$ 

#### REFERENCES

- 1. Cornell, C. A.
  "Implementing Probability Based Structural Codes" in <u>Probabilistic</u>

  <u>Design of Reinforced Concrete Buildings</u>, Publication SP-31, American

  Concrete Institute, Detroit, 1972.
- Cornell, C. A.
   "A Probability Based Structural Code"
   Journal, American Concrete Institute, Vol. 66, No. 12, Dec. 1969.
- Lind, N. C.
   "Consistent Partial Safety Factors"
   Journal of the Structural Division, American Society of Civil Engineers,
   Vol. 97, No. ST6, June 1971.
- Augusti, G., Baratta, A.
   "Probabilistic Theory of the Resistance of Columns", Publication No. 244,
   Faculty of Engineering, University of Naples, 1970.
- 5. Chung, B. T., Lee, G. C.

  "Buckling Strength of Columns Based on Random Parameters", <u>Journal of the Structural Division</u>, American Society of Civil Engineers, Vol. 97, No. ST7, July 1971.
- 6. Bjorhovde, R. "Deterministic and Probabilistic Approaches to the Strength of Steel Columns", Ph.D. Dissertation, Lehigh University, Bethlehem, Pa., 1972.
- 7. Bjorhovde, R., Tall, L.
  "Maximum Column Strength and the Multiple Column Curve", Fritz Engr.
  Lab. Rep. No. 337.29, Lehigh University, Bethlehem, Pa., Oct. 1971.
- 8. Column Research Council
  "Guide to Design Criteria of Metal Compression Elements"
  John Wiley and Sons, 1968.
- 9. Lenz, J. C.
  "Reliability Based Design Rules for Column Buckling", M. S. Thesis,
  Washington University, St. Louis, Mo., Jan. 1972.

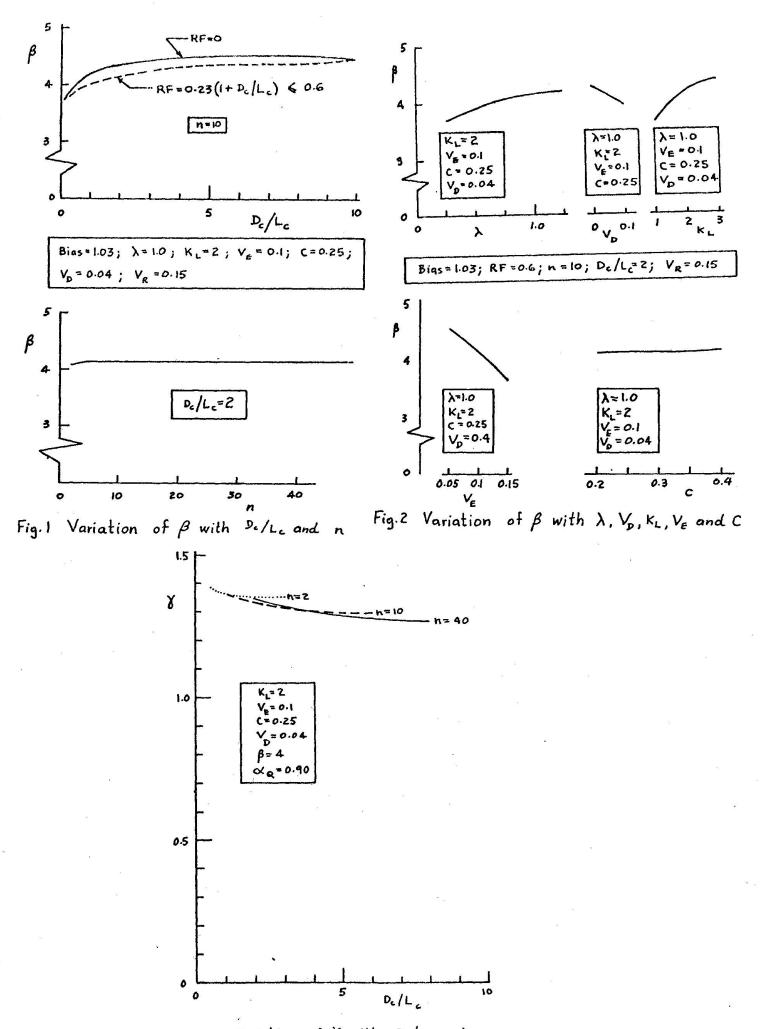


Fig. 3 Variation of 8 with Pc/Lc and n
371