Zeitschrift: IABSE reports = Rapports AIPC = IVBH Berichte

Band: 47 (1983)

Artikel: Risk assessment with statistical data

Autor: König, Gert / Wittke, Bernd

DOI: https://doi.org/10.5169/seals-36641

Nutzungsbedingungen

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. Mehr erfahren

Conditions d'utilisation

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. En savoir plus

Terms of use

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. Find out more

Download PDF: 24.11.2025

ETH-Bibliothek Zürich, E-Periodica, https://www.e-periodica.ch

Risk Assessment with Statistical Data

Estimation de risques au moyen de données statistiques

Risikoabschätzung mittels statistischer Daten

Gert KÖNIG
Prof. Dr.-Ing.
Technische Hochschule
Darmstadt, Fed. Rep. of Germany



Gert König (1934), professor of civil engineering at the Technische Hochschule Darmstadt, got his doctorate in 1966. Since 1971 he is a consultant in civil engineering and in 1972 he received the degree of a checking engineer.

Prof. König is mainly involved in design, checking of design, code development and safety analysis.

Bernd WITTKE Dipl.-Ing. König und Heunisch Frankfurt a.M., FRG



Bernd Wittke, born 1950, received his civil engineering degree from the Technische Hochschule Darmstadt in 1976.

For five years he was involved in the construction of big bridges in a german contractor's planning department. He is now on the staff of Prof. König's engineering bureau in Frankfurt/Main.

SUMMARY

This report deals with recent results of a risk analysis in the field of civil engineering, with special consideration of bridges. In addition to a weak point analysis, some statements are made about the risk from damages of large prestressed concrete bridges in two federal states of the Federal Republic of Germany.

RESUME

Ce rapport traite de résultats récents d'une analyse de risque dans le domaine des constructions civiles à l'exemple des constructions des ponts. A partir d'une analyse des points faibles, il est possible de prédire le risque dû à des dommages causés aux grands ponts en béton précontraint, de deux provinces de la Rép. féd. d'Allemagne.

ZUSAMMENFASSUNG

Dieser Bericht befasst sich mit neueren Ergebnissen einer vom Bundesminister für Forschung und Technologie geförderten Risikostudie für das Bauwesen am Beispiel von Brückenbauten. Neben einer Schwachstellenanalyse gelingt eine Aussage über das Risiko aus Beschädigung von grossen Spannbetonbrücken in zwei Bundesländern der Bundesrepublik Deutschland.



1. INTRODUCTION

The analysis of structural damages or accidents which has been made by various authors [1][2][3] in the past, will also been carried out in a study of my office which deals with the condition and the corresponding damages of structures. The analysis is supported by the minister for r.a.t.. In contrast to the authors mentioned above the statistical empirical research is restricted to bridges which can approximately be combined to a parent population and for which data is available.

An arbitrary selection of great valley bridges in two German federal states has been taken as a sample for the analysis. In the first country prestressed concrete bridges with a total length greater than 200 m and in the second country bridges of a single highway-line were selected.

As a result from the global registration of damages, it will be attempted to find a relation to the parent population, to make assessments of the risk of defects in the period of use, and to give advice for risk reduction.

2. STRUCTURE AND COLLECTING OF DATA

The investigation is based on files of construction time, on correspondence, drawings, static calculations, expertises and the report of the periodic bridge examinations of the responsible departments.

A method which is based on a fixed definition of terms and which must simultaneously show high flexibility, is necessary because of the heterogenous structure and the great number of data. Starting from a terminological chain with the causality:

fault - shortcoming - defect - damage - consequential damage

the terms, based on [1] and [2], are defined as follows:

fault Deviation between the results of human actions and the issue of

the action

shortcoming Negative deviation between an aimed condition and the obtained

condition, if the deviation exceeds certain tolerable values

defect Alteration of an object or human being in the aimed or natural

turn of occurence in regard of form, structure or function

If one now wants to register the condition of structures which are seemingly without any damage, i.e. structures which did not cause any cost for reparation, one has to concentrate the collection of data on the defects which can also be understood as damage-indicators [4].

By means of several terms, subjective as well as objective ones, it is possible to register very different kinds of defects numerically, so that they can be compared with each other. To describe a case sufficiently, one has to give information about the following parameters:

- quantity
- state
- effect
- type of beginning
- type of defect
- place
- material
- extent



Fixed subterms can be provided for each term of the linguistic system "defect". By means of the subterms, the most different cases are defined as combinations of those terms. This method of splitting complex facts in previously defined subtermgroups is very well suited for data storage by electronic data processing. The necessary catalogues of the defined subterms are used for each case of defect, to steadily fill in the questionaire which has been developed for this reason. Apart from the specific data of defects, the basic data of the structural system, i.e. for example the cross-section of the superstructure, clear spans etc., are registered according the same scheme. In that case, the questionaire as well as the corresponding computer programmes only work on the basis of the given numerical codes.

3. EVALUATION

A total of 76 prestressed concrete bridges were examined and about 15.000 defects were registered. As a result, 12.500 different cases at diverse components of the system "bridge" can be separated. A component can be for example a cross-section of the main girder, a bearing or an expansion joint. Evaluating the results, one has to consider that the chosen bridges are built in a period of 20 years (1960 - 1980, see figure 1). The mean value of the observed service life is about 10 years, i.e. a total of 713 years of use were examined.

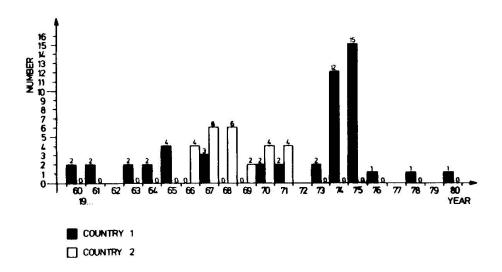



figure 1: Examined bridges - year of end of construction


Looking at the distribution of the effects of the defects in regard to the future condition of a component (figure 2), it appears that in the majority of all cases the durability of the building is endangered. Consequently, considerable costs arise from the maintenance of the bridges. Drawing a conclusion of this state of affairs, two main questions have to be asked:

- How many cases can be prevented directly and how much percent has to be added to the deviations of the resistances?
- How great is the real extent?

To answer the first question, weak-point-analyses are useful which are best carried out by correlations between the defects and the place of defects. As an example, the relationship between uncovered reinforcement and the surface of the superstructure will be presented. The analysis shows that the appearance of such a defect is no longer dependent on the type of the cross-section. Thus, the relation outlined in figure 3 can be deduced.



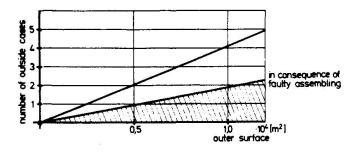

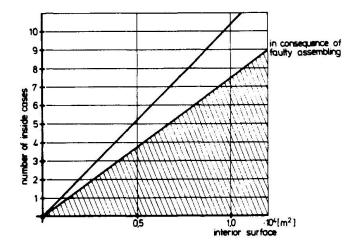




figure 2: Effect of the defects

figure 3: Uncovered reinforcement per surface (outside, inside respect.)

Corrosions of reinforcement were specially marked during the collecting of data, if the cause of damage could clearly be recognized, i.e. the shortcoming 'too low cover' in consequence of faulty assembling. Thus it is now possible to evaluate the influences separately. Figure 3 shows first of all, that there are more interior cases than outside ones. This effect is not due to different kinds of examination methods because all bridges have been checked inside as well as outside. As shown in the following, the cause of this is rather a shortcoming depending on the site method. Secondly, the part of those cases is almost constant, whose cause wasn't clearly recognizable, i.e. about 2.5 · 10⁻⁴ cases per m²-surface, inside as well as outside. This value sould be connected with the dispersion of the resistance. Moreover, one can see that a high percentage, outside #45%, inside even #70%, can be prevented by controlling the position of reinforcement. More developed analyses which consider the special place in the cross-section, i.e. deck slab, web, bottom chord, reveal other weak points.

Thus, bridges with bottom chord for example show the following measured values:

- In the webs, the number of interior uncovered reinforcement is more than double the size of outside cases. It seems, that the site method may be a factor because the interior formwork is assembled finally or 'blindly' as one might say.
- In the bottom chord, the number of outside cases is even five times as bis as the number of the interior ones. The cause may be tipping of spacers or simple deformation of the bottom reinforcement by the workers.

In bridges without bottom chord (e.g. T-beams), the high portion (85%) of the uncovered reinforcement in the webs can probably be explained by inexact reinforcement work in the narrow space of the web framework. In most cases the reinforcement is inserted from the top.


A



4. CLASSIFICATION

The second question about the real extent requires a graduation in accordance with the importance and size of the different cases. According to several publications [5] [6] [7] [8], it is possible to classify the cases into damage classes:

- S1 very small damage (no real financial loss)
- S2 small damage, with effect on serviceability
- S3 small damage, with effect on serviceabilty and durability
- S4 medium-sized damage (can be reconstructed at limited expense)



A - measures for maintenance necessary in due time

B - counter-measures necessary immediately

A corresponding procedure of classification which rates the different parameters of the defect mentioned above, in accordance with their importance, results in frequencies of the damage classes which are shown in figure 4.

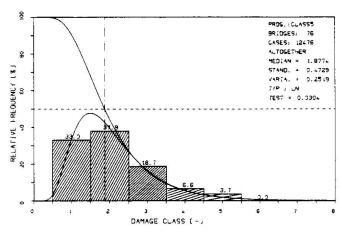


figure 4: Damage classes

On the supposition that the cases of defects are a sufficient random sample of a probabilistic model, one can derive a model of failure for the system "bridge" in form of a distribution of the damage classes. The density function refers to a constant damage rate λ [1/a·m²] which can be obtained satisfactorily by fiqure 5. This rate depends on different factors, such as type of cross-section, site method, method of bearing etc. By means of the model, the values of class S6, which were not measured in the observed service life, can theoretically be extrapolated to $7 \cdot 10^{-3}$.

To compare the damage classes with each other, a cost model is necessary. Such a model can be outlined on the following conditions:

- an annual rate of costs for maintenance of 2.5% (corresponding to the construction expenses for the superstructure) (see [8])
- an average damage rate λ [1/a·m²]
- an average factor of interest of 5% (German index from 1960 to 1980 [7], uniformly distributed beginning of defects in the time of use)
- frequencies from figure 4

$$C_i = p^{S_i}$$
 $S_i = damage class$
 $C_i = costs per class [DM]$



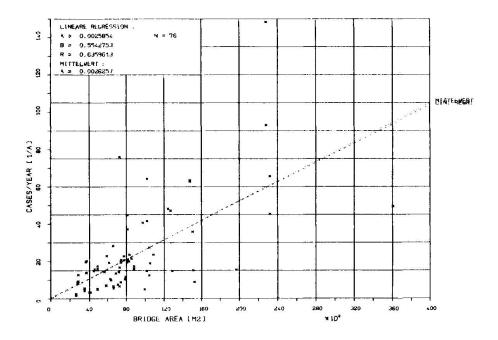


figure 5: Damage rate

Taking the average over all examined bridges, one computes the basis to

$$p = 9.8 \approx 10$$
 (exactly valid for 1980)
 $C_i = 10^S i$ [DM]

Assuming this model and comparing group S1 to S4 with S5 + S6, it is obvious that the contribution of the many small damages to the estimation of the critical risk of total failure can be neglected.

5. CONCLUSION

The statistical empirical method which has been introduced makes it possible to give statements about weak points in a structural system and to draw conclusions about the risks of defects. This method is practicable for every other structural system with suitable classification and calibration.

REFERENCES

- 1. Matousek/Schneider: Untersuchungen zur Struktur des Sicherheitsproblems bei Bauwerken. Birkhäuser Verlag, Febr. 1976
- Schäfer/Dahm: Vorschläge für eine Schadensstatistik im Bauwesen. Abschlußbericht, Darmstadt 1977
- 3. Yam/Armitage/Walker: Study of Building Failures a New Approach. Building Research Establishment, U.K.
- 4. Matousek: Maßnahmen gegen Fehler im Bauprozeß. Birkhäuser Verlag 1982
- 5. Défauts apparents des ouvrages d'art e béton. Ministéré De L'Equipement, France 1975
- Better Targeting of Federal Funds Needed to Eliminate Unsafe Bridges.
 Report of the General Accounting Office. USA, Aug. 1981
- 7. Schäden an Brücken und anderen Ingenieurbauwerken. Der Bundesminister für Verkehr/Abteilung Straßenbau. BRD 1982
- 8. Rabe: Die Unterhaltung von Stahlbeton- und Spannbetonbrücken. Bauingenieur 56/81 S. 431