

**Zeitschrift:** IABSE reports = Rapports AIPC = IVBH Berichte  
**Band:** 48 (1985)

**Artikel:** Connections using cast steel T-stubs in composite structures  
**Autor:** Saeki, Toshio / Kato, Ben / Sato, Kuniaki  
**DOI:** <https://doi.org/10.5169/seals-37465>

#### **Nutzungsbedingungen**

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

#### **Conditions d'utilisation**

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

#### **Terms of use**

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

**Download PDF:** 14.01.2026

**ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>**

## Connections Using Cast Steel T-Stubs in Composite Structures

Assemblages utilisant des souches en forme de T pour les structures mixtes

Verwendung von Gussstahl T-Stücken in Verbundtragwerken

**Toshio SAEKI**

Senior Res. Eng.  
Kajima Corp.  
Tokyo, Japan



Toshio Saeki, born in 1942, received his Master's Degree in Eng. from Waseda Univ., Tokyo. Since 1965, he has carried out research on the structural behaviour of connections in steel structures at Institute of Kajima Corp.

**Ben KATO**

Professor  
Tokyo Univ.  
Tokyo, Japan

**Kuniaki SATO**

Manager  
Kajima Corp.  
Tokyo, Japan

**Kozo TOYAMA**

Assist. Head  
Kajima Corp.  
Tokyo, Japan

**Satoshi BESSHIO**

Senior Res. Eng.  
Kajima Corp.  
Tokyo, Japan

### SUMMARY

The aim of this study is to investigate the structural behaviour under seismic loading of beam-to-column connections in composite structures, in which steel beams are connected to concrete-encased steel columns by high-strength bolts using cast steel T-stubs. For this purpose, lateral load tests were conducted on beam-to-column subassemblages of this composite structure and the ultimate flexural strength of the connections was investigated both experimentally and theoretically.

### RÉSUMÉ

Le but de l'étude présentée ici est d'examiner le comportement sous charges sismiques d'assemblages poutres-colonnes dans les constructions mixtes; la poutre en acier est liée à travers le béton de la colonne par une souche en forme de T, en acier moulé et par des boulons HR. Ce type d'assemblage a été testé, avec des charges latérales, et la résistance ultime à la flexion a été déterminée expérimentalement et par calcul.

### ZUSAMMENFASSUNG

Das Ziel dieser Studie ist die Untersuchung des Tragverhaltens einer Träger-Stützen Verbindung in einer Verbundkonstruktion unter seismischer Belastung. Dabei werden die Stahlträger mit den ausbetonierten Stahlstützen mittels hochfester Schrauben unter Verwendung von Gussstahl T-Stücken verbunden. An Träger-Stützen Elementen des Verbundtragwerks wurden Biegeversuche durchgeführt, und die Traglast dieser Verbindung wurde experimentell und theoretisch ermittelt.



## 1. INTRODUCTION

Composite structures have been applied lately not only to low- and middle-rise buildings but also high-rise buildings for the advantages of structural rationality and economy in building construction in Japan.

A composite structure system, which consists of concrete encased steel column and steel or composite beam, has been developed. The most distinctive feature of this system is that the high-strength bolted T-stub connection method using cast steel attachments called HISPLIT is adopted in the connection of steel beam and steel member of the column. HISPLIT is an improved version of ordinary T-stubs; the thickness of T-stub flange is tapered from stub center to edges, and thus the prying force due to the flexural deflection of the T-stub flange is minimized. It has been confirmed experimentally that the structural properties of the HISPLIT connection in steel frames well enable it to fulfil the function of a moment resisting rigid connection. However, an out-of-plane bending force acts on the flange of the H-shaped steel column because the lateral stiffener plates in the steel column are generally eliminated in the HISPLIT connection system, and so the resisting capacity of the flange of the H-shaped column controls the strength and rigidity of the connection considerably.

Previous to the application of the HISPLIT connection system to the composite structure, the tension test was carried out to investigate the fundamental behaviour of beam flange-to-column connection being covered by concrete and the theoretical prediction method of the pull-out strength of the connection based on the test results has been suggested in Ref. [1].

This paper investigates experimentally the structural behaviour of beam-to-column connection of this composite structure under seismic loading. It also presents the prediction method of ultimate flexural strength of such connection and compares this prediction with the results of the experiments.

## 2. OUTLINE OF THE COMPOSITE STRUCTURE SYSTEM

An outline of the system is shown in Fig.1. The steel column is rolled H-shaped steel of considerably small cross section compared with the size of concrete encasement. By means of this small section the restraining effect of the covering concrete on the structural properties of the connection is enhanced; moreover greater productivity and cost-saving can be achieved. To increase the restraining effect, tie-bars are used in addition to ordinary square hoops in the column. Floor slab comprising a corrugated metal deck and concrete, is connected to the beam by means of stud connectors to form a composite beam. The steel column and steel beam are connected by high-strength bolts using HISPLIT.

This system, known as the KAJIMA MIXED-STRUCTURE SYSTEM, or KM system, has already been used in more than 50 low-rise and middle-rise buildings and has contributed greatly to cutting construction time and costs.

## 3. LATERAL LOAD TEST OF BEAM-TO-COLUMN SUBASSEMBLAGE

### 3.1 Test method

Lateral load test was performed using full-scale beam-to-column subassemblage specimens as shown in Fig.2 to observe the structural behaviour of beam-to-column connections in KM system under seismic loading. As shown in Table 1, in three specimens the beam was connected to the strong-axis of the column (strong-axis specimens), and in another to the weak-axis (weak-axis specimen). In the test of strong-axis specimens, the kind of beams and the method of reinforcement of the connection were chosen as the experimental parameters.

All specimens were designed so that their maximum strength could be determined from the ultimate flexural strength of the connection, which was calculated using Eqs. 1, 2, 3 and 4 proposed in Ref. [1].

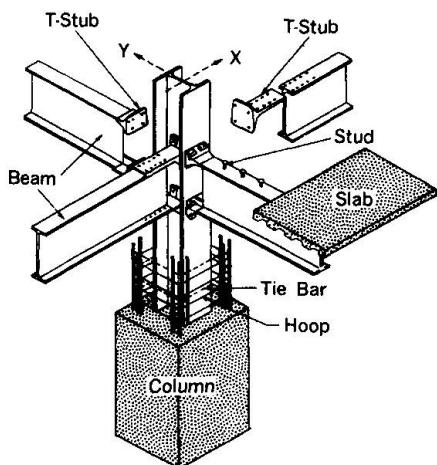


Fig. 1 KM system

Specimen No.	Beam	Reinforcement of joint panel
CX-O	Composite beam	Hoops and tie-bars
SX-O	Steel beam	Hoops and tie-bars
CX-P	Composite beam	Plates
CY-O	Composite beam	Hoops and tie-bars

Table 1 List of Test Specimen

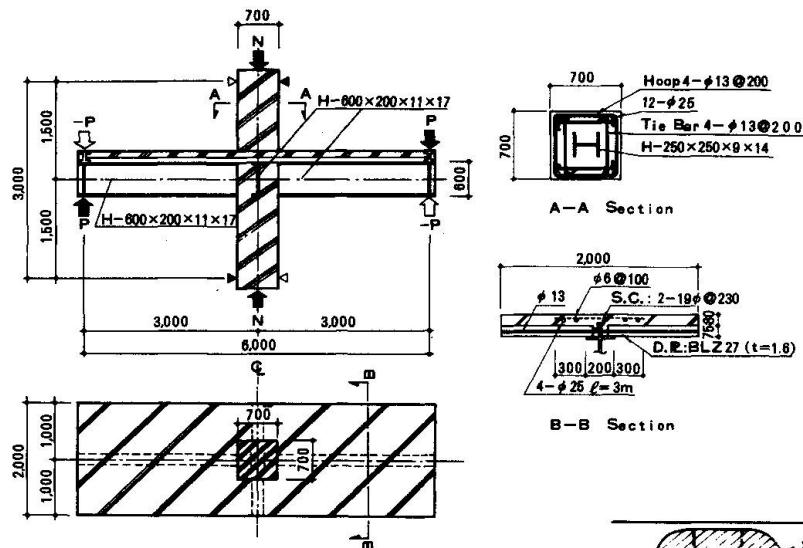


Fig. 2 Test Specimen

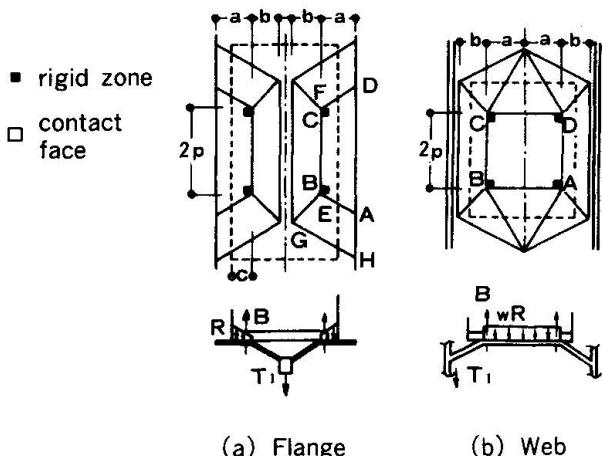


Fig. 3 Collapse Mechanism of Steel Column

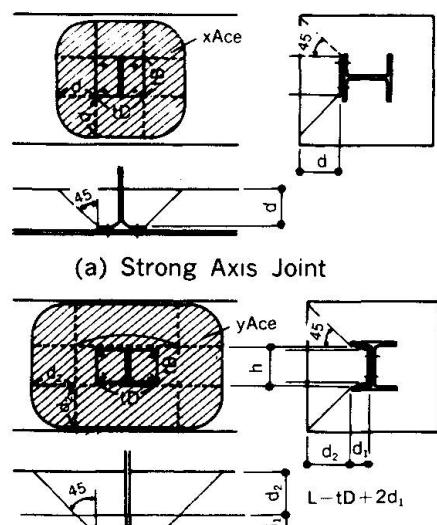


Fig. 4 Projected Area

$$j_u^M = T_y \cdot j_b \quad (1)$$

$$T_y = T_s + T_c \quad (2)$$

in which  $M_u$  is the ultimate flexural strength of the connection,  $T_y$  is the pull-out strength of the beam flange-to-column connection being covered by concrete,  $T_s$  is the yield strength of the connection between the steel column and steel beam, and  $T_c$  is the pull-out strength of the covering concrete.  $T_s$  and  $T_c$  are given by following equations, respectively (see Figs.3 and 4).

For strong-axis specimens,

$$\left. \begin{aligned} xT_s &= \frac{4}{b} (2p + \sqrt{16a \cdot b + 7b^2}) m_p \\ xT_c &= 32.7 xA_{ce} \sqrt{f_c} \end{aligned} \right\} \quad (3)$$

and for week-axis specimen,

$$\left. \begin{aligned} yT_s &= \frac{8}{b} (p + \sqrt{4a \cdot b + 3b^2}) m_p \\ yT_c &= 32.7 yA_{ce} \sqrt{f_c} \\ yA_{ce} &= d_2 [2(L + h) + d_2] + L \cdot h - t_D \cdot t_B, \quad L = t_D + 2d_1 \end{aligned} \right\} \quad (4)$$

in which  $m_p$  is the full plastic moment per unit width of steel column flange, and  $A_{ce}$  is effective projected area on concrete surface when cone failure is presumed to occur in the concrete part of the column.

Details of beam-to-column connections are shown in Fig.5 and outlines of HISPLIT used are shown in Fig.6. The mechanical properties of the steel, reinforcements and concrete are shown in Table 2. The high-strength bolts are of F10T grade and are 22 mm in diameter specified by Japanese Industrial Standards. These were tightened to a specified pretension of 221.5 kN. In the specimens with composite beam, CX-0, CX-P, and CY-0, concrete slab of 2 m in width was attached to the steel beam along its entire length with stud connectors. Two rows of studs of 19 mm in diameter were welded to the beam flange with a space of 230 mm along the length of beam.


Constant axial load of  $0.3 N_y$ , where  $N_y$  is the axial yield load, was applied to the column. And a couple of reverse transverse load  $P$  was repeatedly applied at beam ends.

### 3.2 Test results


#### 3.2.1 Load-deflection curves of subassemblage

The relationship between load on the beam ends  $P$  and deflection at the loading point  $\delta$  is shown in Fig.7. Predicted values of the ultimate flexural strength of the connection calculated using Eqs. 1, 2, 3 and 4 are shown in terms of transverse load at beam ends  $P'$  and by chain lines in the figure. Each beam in the three strong-axis specimens did not yield up to its maximum load. Accordingly it can be seen that the maximum strength of these specimens was governed by the strength of the connection as predicted. However, these maximum loads were 30~40 % greater than the predicted values  $P'$ . The reason for this will be explained that the concrete of the beam end will restrain the rotation of the beam.


The load-deflection curves of CX-0 and CX-P with composite beams were quite similar; they showed stable softening-type up to the maximum loads, but after that they gradually changed into hardening-type and load carrying capacity tended to decrease. Specimen SX-0, with steel-only beam, exhibited about 40 % less elastic rigidity and maximum strength almost 25 % less than the above two specimens. However, it maintained a hysteresis curves of softening-type throughout testing.

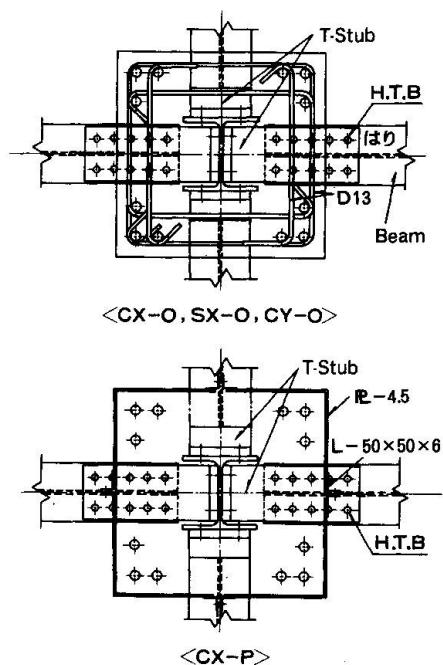

**Fig. 5** Details of Beam-to-Column Connections

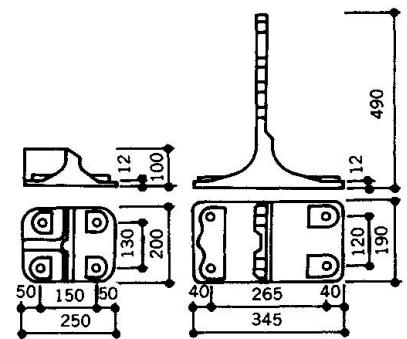

**Fig. 6** HISPLIT

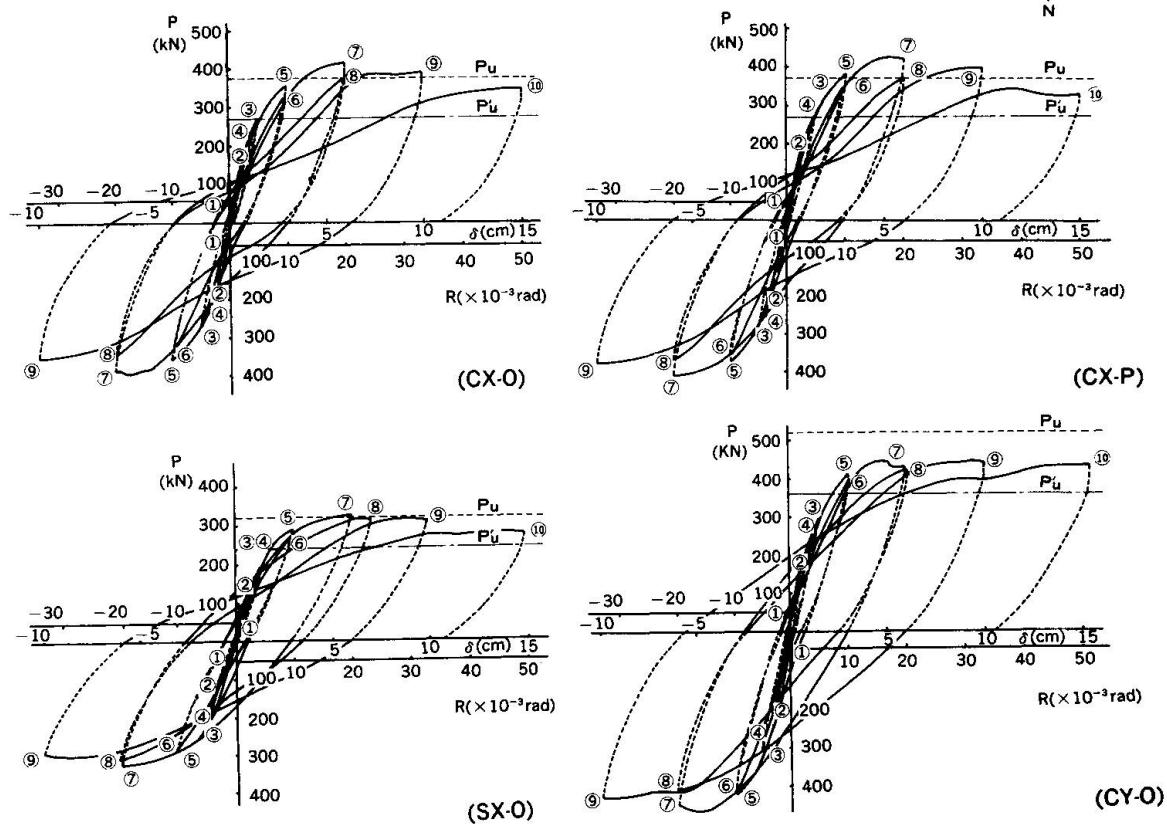

**Fig. 7**  $P-\delta$  Relationship of Subassemblages



In weak-axis specimen CY-0, the local buckling occurred in the beam flanges at about  $\delta = +5$  cm. However, the buckling load was about 25 % greater than  $P'$  of this specimen, and the hysteresis curve depicted spindle-type even after buckling.

### 3.2.2 Pull-out deformation of beam flange-to-column connection

The relationship between load  $P$  and pull-out deformation  $\delta$  of the beam flange-to-column connection is shown in Fig.8. The  $\delta$  of the three strong-axis specimens were very small at 1 mm or less up to about half of each maximum load. However, at each maximum load,  $\delta$  increased to 3.2~5.4 mm, which occupied 40~45 % of the deflection at loading point  $\delta$ , and is thus the most important factor in  $\delta$ . Furthermore,  $\delta$  tends to increase rapidly after maximum load. In the light of these observations, it can be seen that all of beam-to-column connections of the three strong-axis specimens yielded at each maximum load.

On the other hand, in the specimen CY-0 the beam end was embedded more deeply in the column than CX-0, so that  $\delta$  of CY-0 was as a whole smaller; and CY-0 was less damaged around the connection throughout testing.

### 3.2.3 Behaviour of joint panel

The relationship between load  $P$  and shear deflection angle  $\gamma$  of the joint panel is shown in Fig.9. In both specimens SX-0 and CX-0, whose joint panels are reinforced with square hoops and tie-bars, shear yield of steel web panels was observed, but yield of hoops and tie-bars were not observed at each maximum load. Therefore, the concrete panels of these specimens seem to have some reserve strength at each maximum load. In specimen CX-P, whose joint panel is encased in plates instead of the square hoops and tie-bars, the shear yield load of steel web panel and rigidity were greater than that of specimen CX-0 and SX-0. Therefore, it can be said that shear properties of the joint panel encased by plates are superior or equivalent to that of the joint panel reinforced with square hoops and tie-bars. As regards specimen CY-0, its joint panels showed stable behaviour up to its maximum load.

## 4. ANALYSIS OF THE ULTIMATE STRENGTH OF THE CONNECTION

From the test results described in the previous chapter, it was found that the maximum loads in the strong-axis specimens were governed by the flexural strength of the connection, but the maximum loads in these specimens far exceeded that calculated on the basis of pull-out strength of beam flange-to-column connection. So, the ultimate flexural strength of the beam-to-column connection is analysed theoretically using following assumptions.

- Ultimate flexural strength of the connection can be predicted by summing the resistant moment on the basis of the pulling-out strength of beam flange-to-column connection given by Eq. 2 and the additional that on the basis of the bearing strength of the concrete encasing beam end.
- The bearing stress acts evenly along the whole embedded length of beam flange under compression which is embedded in the column; and the force acts at the center of the embedded length as a concentrated load.

A moment resisting model of beam- to-column connection based on above assumptions is shown in Fig.10. Considering the moment equilibrium at the column steel surface of the connection, Eq. 5 is introduced.

$$T_y \cdot j_b = M_b + \frac{1}{2} Q_b (D_c - s D_c) - \frac{1}{4} P_n (D_c - s D_c) \quad (5)$$

in which  $M_b$  is the bending moment of the beam at the column surface ( $= P \cdot l_b$ ),  $l_b$  is the length of beam,  $Q_b$  is shear force in beam ( $= P$ ), and  $P_n$  is total bearing force which is expressed by Eq. 6.

Materials	Thickness or diameter (mm)	Yield stress (MPa)	Tensile strength (MPa)	Compressive strength (MPa)
Steel Plates	4.5	276	431	
	9	281	473	
	11	344	518	
	14	265	482	
	17	294	463	
Reinforcements	13 $\phi$	364	520	
	25 $\phi$	357	533	
Concrete				25

Table 2 Mechanical Properties of Materials

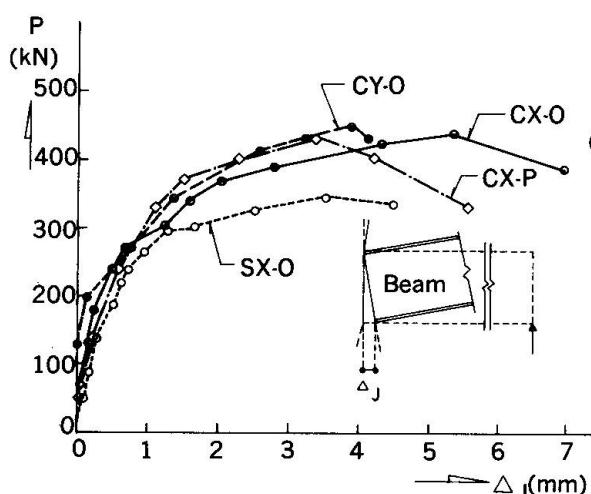


Fig. 8 P- $A_J$  Relationship of Beam Flange-to-Column Connection

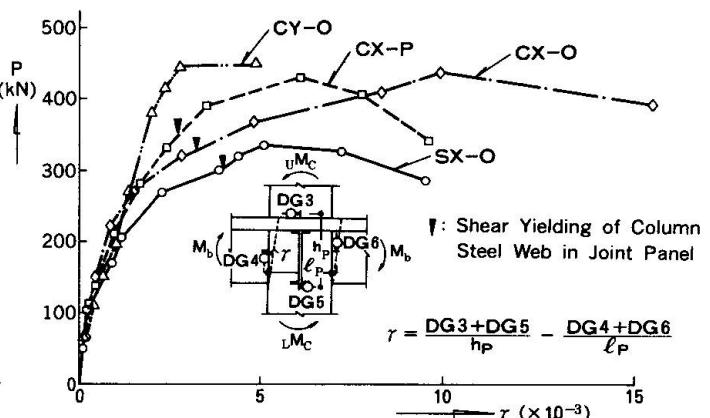


Fig. 9 P- $r$  Relationship of Joint Panel

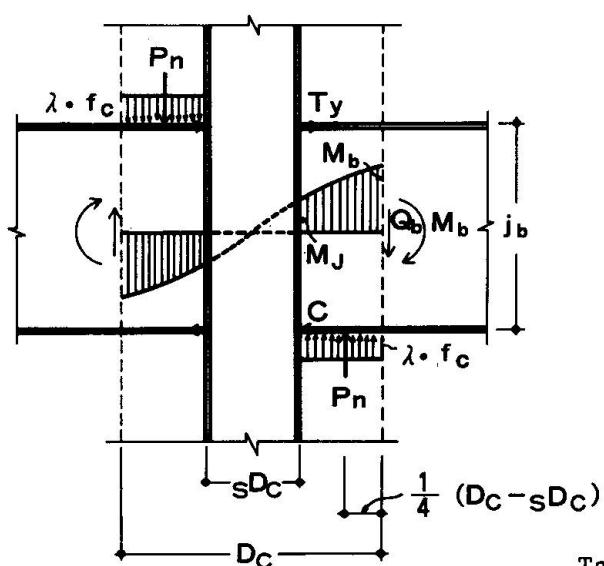


Fig. 10 Moment Resisting Model of Beam-to-Column Connections

Specimen No.	ePmax (kN)	Pu (kN)	Pu/ePmax (%)
CX-O	409.1	366.9	89.7
SX-O	328.6	321.8	97.9
CX-P	418.9	366.9	87.6
CY-O	446.9	515.5	115.4

$e_{max}^P$  = experimental maximum load

Table 3 Comparison of Ultimate Strength between Predictions and Test Results

$$P_n = \frac{1}{2} (D_c - s D_c) \cdot b \cdot \lambda \cdot f_c \quad (6)$$

in which  $f_c$  is compressive strength of concrete,  $\lambda$  = ratio of the bearing stress to  $F_c$ .  $\lambda$  varies by the amount of reinforcements in the concrete and by the extent of the area acting bearing force, etc.. However, in this case  $\lambda$  was fixed at 2.0, a value chosen on the basis of Ref. [2]. Therefore, substituting  $M_b = P \cdot l_b$ ,  $Q_b = P$  and  $P$  in Eq. 6 at  $\lambda = 2.0$  in Eq. 5, and solving Eq. 5 for the transverse load at the beam ends  $P$ , the ultimate load of the connection  $P_u$  is given by Eq. 7.

$$P_u = \frac{2}{D_c - s D_c + 2 l_b} [T_y \cdot j_b + \frac{1}{4} (D_c - s D_c)^2 \cdot b \cdot f_c] \quad (7)$$

in which  $T_y$  is given by Eqs. 2, 3, and 4.

The prediction values of the ultimate flexural strength of beam-to-column connection of the specimens are calculated by using Eq. 7. These predictions are compared with test results in Table 3 and are shown by broken lines in Fig. 7. They have a good agreement with test results in strong-axis specimens. However, they can not compare with test results in weak-axis specimen, because its maximum load was governed by buckling strength of beam.

## 5. CONCLUSIONS

The main conclusions obtained by this investigation are as follows:

- The ultimate flexural strength of beam-to-column connections in strong-axis specimens can be predicted accurately by Eq. 7.
- Beam-to-column connections in this composite structure have a stable restoring characteristics as a moment resisting rigid connection before yielding of them.
- The rigidity and flexural strength of the composite beam-to-column connection are greater than that of the steel beam-to-column connection.
- The structural behaviour of the joint panel encased with steel plates is evaluated as the same as that of the joint panel reinforced with square hoops and tie-bars.

From above results, in order to design a beam-to-column connection as a moment resisting rigid connection using KM system, it is desirable that the ultimate flexural strength of the connection as calculated by Eq. 7 exceeds the full-plastic strength of beam. Also it is necessary that the depth of the concrete covering around the connection should be of sufficient depth and that the confining effect of the concrete should be increased by hoops or others.

## REFERENCES

1. B. KATO, J. TAGAMI, Beam-to-Column Connection of A Composite Structure. The Second US-Japan Joint Seminar on Composite and Mixed Construction. Seattle, WA, July 1984.
2. M. WAKABAYASHI, K. MINAMI, Y. NISHIMURA, Design Method for Mixed Structures, Part 1, Stress Transfer Mechanism of Exterior Joints. Disaster Prevention Research Institute Annuals of Kyoto Univ.. No.26B-1. 1984.