

Zeitschrift: IABSE reports = Rapports AIPC = IVBH Berichte
Band: 59 (1990)

Artikel: Fatigue of road bridges
Autor: Tschemmernegg, Ferdinand
DOI: <https://doi.org/10.5169/seals-45727>

Nutzungsbedingungen

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

Conditions d'utilisation

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

Terms of use

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

Download PDF: 04.04.2026

ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>

Fatigue of Road Bridges

Résistance à la fatigue des ponts-routes

Ermüdungsfestigkeit von Strassenbrücken

Ferdinand TSCHEMMERNEGG

o. Univ. Prof.
University of Innsbruck
Innsbruck, Austria



Ferdinand Tschemmernegg, born 1939, received his doctoral degree at the technical University of Graz. He worked in the German steel industry and in South America in bridge building. Since 1980, he has been head of the Institute for Steel and Timber Structures at the University of Innsbruck, Austria.

SUMMARY

Fatigue load factors are derived from damage caused by fatigue and it is proposed that these factors should be described in terms of the number of load cycles for different details.

RÉSUMÉ

On montre de quelle façon les facteurs de charge de fatigue sont obtenus à partir des dommages en fatigue, et on propose que ces facteurs soient représentés en fonction du nombre de cycles de charge pour différents détails.

ZUSAMMENFASSUNG

Es wird gezeigt, wie aus Schadensfällen entsprechende Betriebslastfaktoren abgeleitet werden können. Ein Vorschlag wird gemacht, wie diese Faktoren für verschiedene Details je nach Anzahl der Lastwechsel gegliedert werden können.



1. PRELIMINARY REMARKS

Normally in road bridges a fatigue design is not necessary. But in the last years the volume of traffic grew very much and if at the same time the construction in view of fatigue is not well designed the fatigue problems come up in wind and torsional bracings, orthotropic plates (cross and longitudinal girders), transversal bracings and frames and expansion joints. If orthotropic plates are well designed there are no problems in fewer fatigues, but there are some problems today with the other secondary members. It is enjoyable that in the main structures of steel bridges no serious fatigue damages are known and damages in secondary members can be repaired relatively easy. From the known damages and damage analysis should be worked out systematically proposals for improving of the fatigue for this secondary members. In the following it will be tried to develop out of damages a simplified method for the fatigue design. At the present time because of lack of stress range spectras in the details because of lack of measurements the fatigue design according EC 3 [1] is very difficult.

2. STATE OF ART OF FATIGUE CODES IN AUSTRIA

In Austria at the time the fatigue design is regulated in Ö-Norm B 4600 part 3. The bases is the constant amplitude fatigue limit. In the meantime in Austria it was developed a new "guide line for fatigue design" [2] which follows the recommendations EKS-TC 6 and Eurocode 3. Parallel Austria is working on Ö-Norm B 4300 part 5, which also follows the european concept. With the guide line according [2] it is possible to use the european concept before the new Ö-Norm is ready. But the difficulty is, that if you use this concepts on the load side, realistic fatigue loads have to be known and here is a big lack. Using deterministic loads for fatigue designs is not allowed and in the road norms no load models are fixed for the fatigue loadings. In the Ö-Norm there is only the advice that the details should be constructive designed in a way that fatigue problems don't occure.

3. FATIGUE DESIGN FOR ROAD BRIDGES, ACCORDING EC 3

The EC 3 gives now a bases for fatigue design with variable amplitude design limit, but the results of such calculation are not controlled by measurements. It will be shown now which difficulties in applications of EC 3 concepts in road bridges occure, if the fatigue design for secondary members has to be done. In comparison to railway bridges the fatigue design of road bridges is more complicated because the trace is changing and so the affect of action is non linear to the action. Also much less measurements have to be done to road bridges in comparison to railway bridges. If you start the fatigue design according Eurocode, first the fatigue loading has to be settled, than the volume of the traffic (mean-daily-number of lorrys) and the design life has to be fixed. With a load model some loading events, for example pulk of lorrys or override-manoevres have to be defined. With this loading events in each detail a design stress spectrum has to be calculated which depends non linear from the action. Normally the stress spectrum is calculated for the hot-spot-point and it is to be decided which point is the hot-spot. For the stress spectrum also changing of traces, distance of lorrys and imperfections of the

$$\Delta\sigma_e = \left[\sum_i \Delta\sigma_i^3 \frac{n_i}{N_e} + \left(\frac{\gamma}{\Delta\sigma_{RD}} \right)^2 \cdot \sum_j \Delta\sigma_j^5 \frac{n_j}{N_e} \right]^{1/3} \quad (I)$$

$$\Delta\sigma_e = \left[\left(\frac{\Delta\sigma_{RD}}{\gamma} \right)^2 \cdot \sum_i \Delta\sigma_i^3 \frac{n_i}{N_e} + \sum_j \Delta\sigma_j^5 \frac{n_j}{N_e} \right]^{1/5} \quad (II)$$


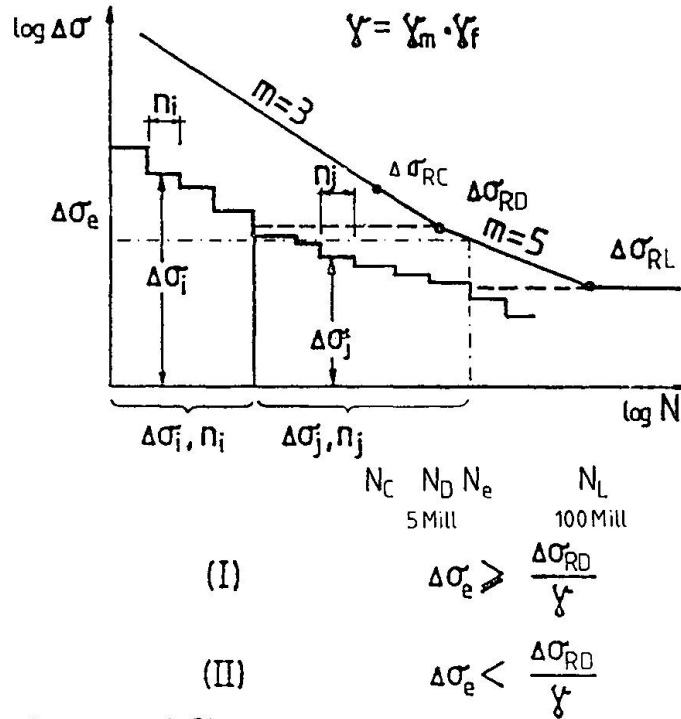

 Fig. 1 Calculation of $\Delta\sigma_e$


Fig. 2 Fatigue loading for bridges and expansion joints

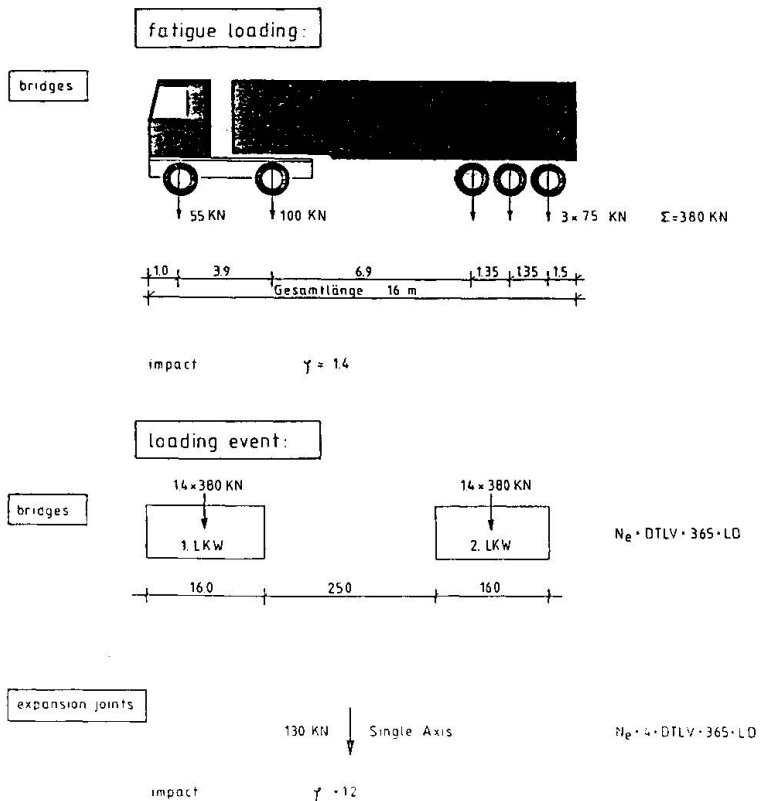

road surface have to be fixed. In expansion joints the influence of the changing of the deflection, the dynamic stiffness of plastics and the difference of phase between vertical and horizontal forces have to be considered. With the worst loading conditions the maximum stresses and stress spectras the hot-spot-point have to be calculated. The next step is to decide the detail categorie using the Miner-summation to get equivalent constant amplitude stress range. According to the assumptions the result of the calculation, for example life time vary in a wide range, because small changing in stresses give a big change of life time. This is due to the logarithmic form of the fatigue strength curve. So the calculation gives only tendencies. Fig. 1 shows the fatigue sessment according EC 3. Computed stress spectras can not be controlled, they should be controlled by measurement. And here is a big lack of measurements.


4. CALCULATION OF FATIGUE LOADING FACTORS FROM DAMAGES

In the following it will be shown how by systematic treatment of damage analysis fatigue load factors of road bridges can be gained. First a realistic fatigue loading has to be set up and the mean-daily-number of lorrys has to be known. In bridges the fatigue loading which is realistic is a lorry with 380 KN and on the expansion joints a single axis of 130 KN is the maximum possible loading for fatigues (Fig. 2). In the hot-spot-point where the damage occurred the maximum stress variation has to be calculated with this models. With the fatigue test the fatigue strength curve for the hot-spot-point has to be determined. Because now the life time and the maximum stress variation is known. The number $N_{e,max}$ of load cycles to damage with constant maximum amplitudes can be gained (Fig. 3). In this number all non linear influences are included out of observations of the damage and with this number it is possible to calculate a realistic fatigue load factor. The fatigue load factor can be calculated according equation (1):

$$\alpha = \frac{\Delta \sigma_e}{\Delta \sigma_{max}} = \left(\frac{N_{e,max}}{5 \cdot 10^6} \right)^{\frac{1}{3}} \cdot \left(\frac{5 \cdot 10^6}{N_e} \right)^{\frac{1}{5}} \quad (1)$$

where N_e the number of all load cycles during the life time is, This equation one get from the one step collective $\Delta \sigma_{max}$ and $N_{e,max}$ in comparison to the one step collective $\Delta \sigma_e$ and N_e according EC 3. With the observations according Fig. 4 and 5 [3,4] using the proposed method you get for a torsional bracing $\alpha = 0,63$ and for an expansion joint $\alpha = 0,34$ (Fig. 6). If the results are drawn in relation to the parameter $N_e / N_{e,max}$ you get Fig. 7. It shows that with growing number of load cycles the fatigue load factor is going down because of the fact that the propability of reaching the maximum stress variation goes down. Out of this it is proposed to give for different details different fatigue load factors, for example:

- details with low number of load cycles as torsion bracings and wind bracings, if they are acting in the main system
 - details with a middle number of load cycles as orthotropic plates, cross bracings and frames
 - details with high load cycle numbers as expansion joints.
- The fatigue load factors would be accordingly 0,65, 0,45 respectively 0,35.

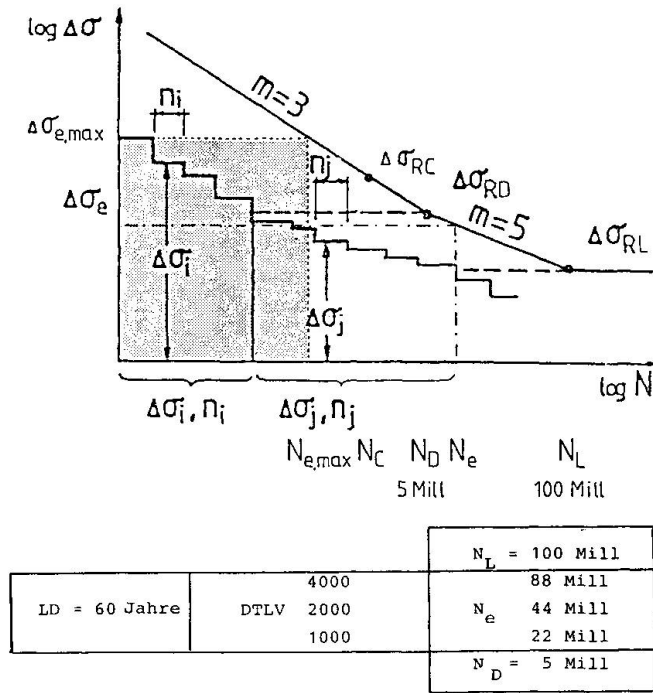

$$\alpha = \frac{\Delta \sigma_e}{\Delta \sigma_{e,max}} \cdot \left(\frac{N_{e,max}}{5 \cdot 10^6} \right)^{1/3} \cdot \left(\frac{5 \cdot 10^6}{N_e} \right)^{1/5}$$

Fig. 3 Determination of $N_{e,max}$

bracing:

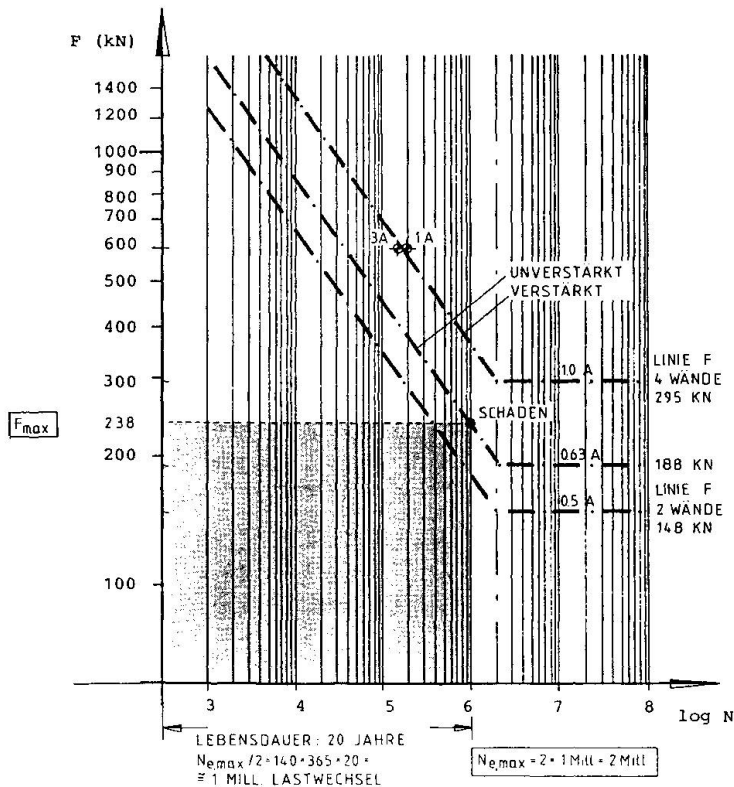


Fig. 4 Fatigue strength curve bracing



expansion joint :

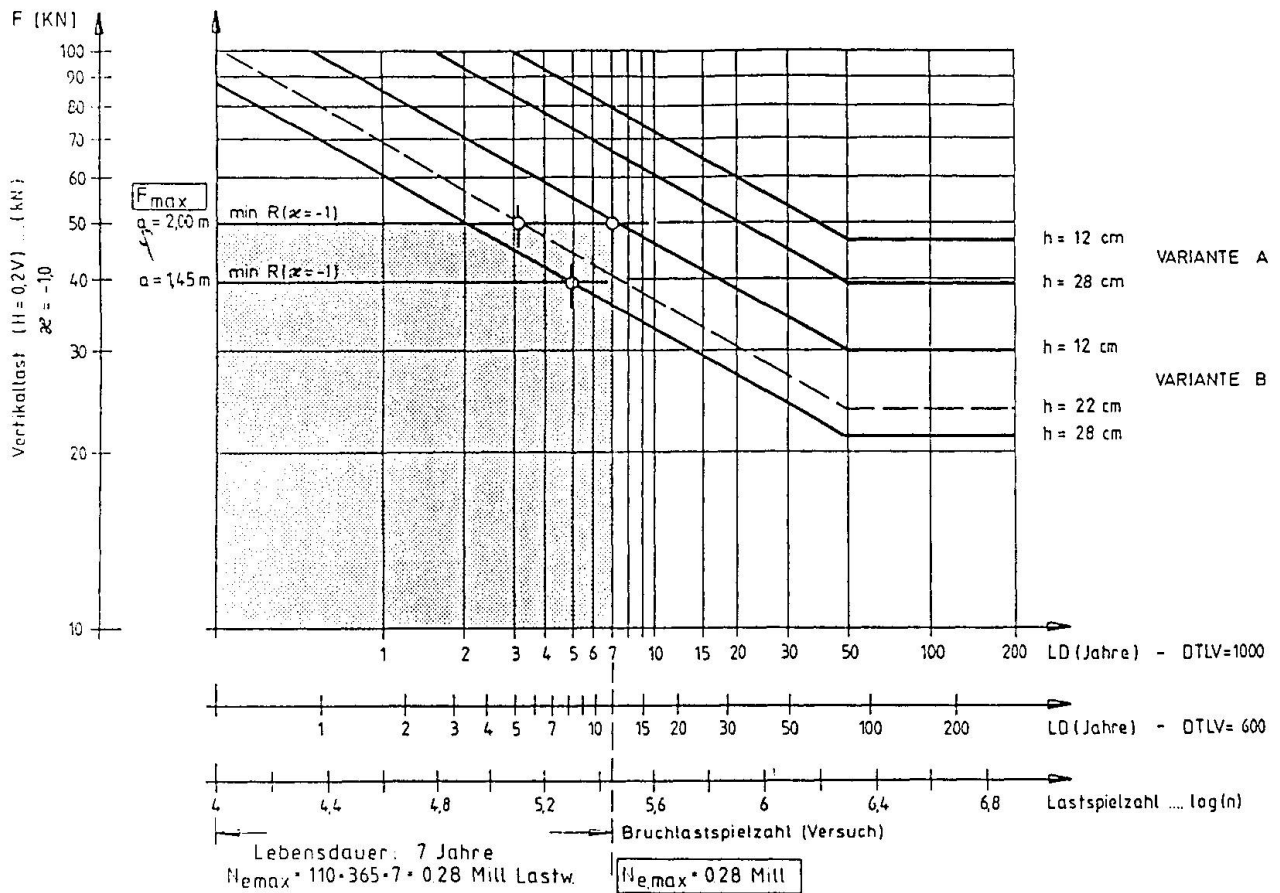


Fig. 5 Fatigue strength curve expansion joint

Lit.	[4]	[3]
member	bracing	expansion joint
LD Jahre	20	7
DTLV	1500	1000
N_e	$1500 \times 365 \times 20 = 11 \text{ Mill}$	$4 \times 1000 \times 365 \times 7 = 10 \text{ Mill}$
$N_{e,max}$	$20 \times 2 \times 140 \times 365 = 2 \text{ Mill}$	$7 \times 110 \times 365 = 0,28 \text{ Mill}$
α	0,63	0,34

Fig. 6 Determination of fatigue load factor α

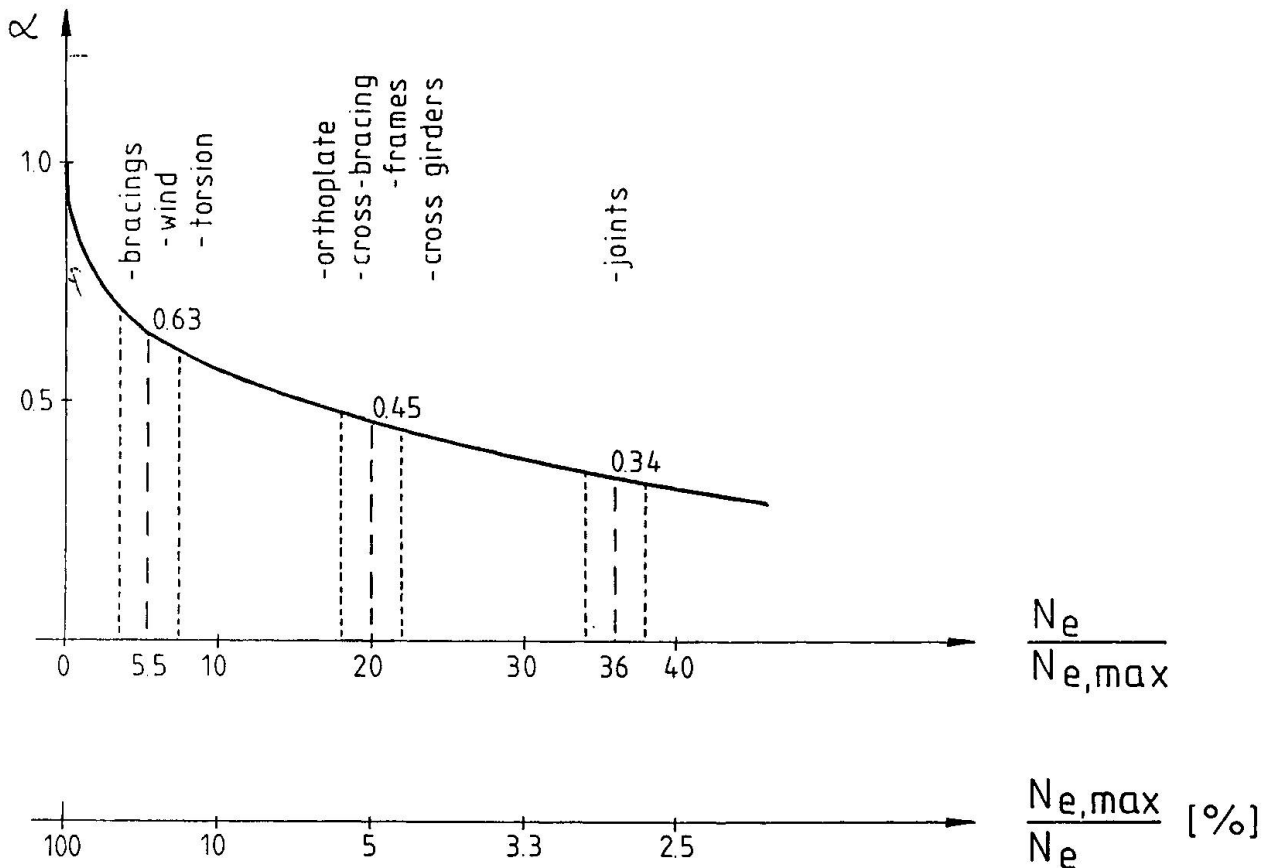


Fig. 7 Fatigue load factor for different details

Further research is necessary to verify this numbers. In any way it will be very helpful to give such fatigue load factors in EC 3 for different details to come to much easier fatigue assessment for secondary members of steel road bridges. Advantage is, that we are used to calculate maximum stresses and the fatigue tests have to be done at maximum stress variation. Further with the known fatigue load factors the remaining life time calculation is much easier and also results of computer simulation can be checked by this method.

References

- 1 Entwurf Eurocode 3, 1988
- 2 Richtlinie zur Berechnung ermüdungsbeanspruchter Konstruktionen aus Stahl, 1. Ausgabe, November 1988, Österreichischer Stahlbauverband, A-1130 Wien, Larohegasse 28
- 3 F. Tschemmernegg - Zur Bemessung von Fahrbahnübergängen, Bauingenieur 63 (1988), S. 455 - 461
- 4 F. Tschemmernegg/H.Passer/O. Neuner - Verbreiterung und Sanierung von Stahlbrücken, Stahlbau 58 (1989), Heft 10, S. 289 - 298

Leere Seite
Blank page
Page vide