

Zeitschrift: IABSE reports = Rapports AIPC = IVBH Berichte
Band: 60 (1990)

Artikel: Properties of brace encased in concrete-filled steel tube
Autor: Waka, Akira / Iwata, Mamoru / Watanabe, A.
DOI: <https://doi.org/10.5169/seals-46530>

Nutzungsbedingungen

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. [Siehe Rechtliche Hinweise.](#)

Conditions d'utilisation

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. [Voir Informations légales.](#)

Terms of use

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. [See Legal notice.](#)

Download PDF: 17.05.2025

ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>

Properties of Brace Encased in Concrete-Filled Steel Tube

Propriétés d'une entretoise de contreventement encastrée
dans un profil tubulaire rempli de béton

Eigenschaften betonumhüllter Fachwerkdagonalen

Akira WADA

Professor
Tokyo Inst.
Tokyo, Japan

Mamoru IWATA

Doctor of Eng.
Nippon Steel Corp.
Tokyo, Japan

A. WATANABE

Structural Eng.
Nippon Steel Corp.
Tokyo, Japan

H. KURIBAYASHI

Structural Eng.
NTT Corp.
Tokyo, Japan

1. PREFACE

Steel has high strength and deformation resistance (see Fig. 1). Braces are extremely effective in increasing the horizontal stiffness and strength of steel frame structures. But braces buckle and rapidly lose strength when subjected to compression force (see Fig. 2). This makes it difficult in plastic design depending on stable plasticity and braces cannot be expected to absorb energy.

Therefore, particularly in earthquake-prone countries, designs of structure are considerably limited when braces are adopted for high-rise buildings.

The authors considered that, if brace buckling could be prevented and the energy absorption capacity increased, damage by earthquakes to columns and beams which support permanent loads would be reduced. The authors developed a bracing system having stable restoration property (see Fig. 3) and in which buckling was prevented by using core plate encased in concrete-filled steel tubes. This paper reports on an experiment conducted on a scale model to study the application of such braces to an actual 24-storied building.

2. EXPERIMENT

2.1 Experiment models

As shown in Fig. 4, the experiment models are 1/2.5 scale and consist of braces, columns and beams. Model A has braces whose core steel yield point is 260.7 N/mm^2 , and model B 477.3 N/mm^2 , while model C has no braces. Figure 5 shows the cross section of the brace used in Models A and B. Core steel is bound by mortar and steel tube to prevent buckling. The coating material isolates the core plate from mortar to prevent an axial force from traveling from core steel to mortar and steel tube.




Fig. 1




Fig. 2

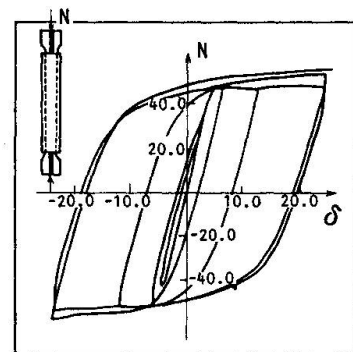


Fig. 3



2.2 Experiment methods

To simulate the behavior of an actual structure under a horizontal force, horizontal rollers were attached to the underside of the columns. And to bear the horizontal force, a vertical roller was attached to the center of the lower beam (see Fig. 4). The horizontal force was applied to the column tops, the direction of application being alternated from left to right. Measurements were made regarding relative storey deformation, axial deformation, strain of braces, etc.

2.3 Results of experiment

All models were confirmed to possess stable restoration property up to a relative storey deformation angle of $1/100$. And braces did not buckle under compressive forces. Figure 7 shows the hysteresis curve of Model A and envelop curves of Models B and C. Models A and B show that the bracing system markedly increases the horizontal stiffness and strength of frame keeping deformation capacity.

3. CONCLUSION

The above results confirm that frames with high energy absorption and earthquake resistance can be made by incorporating braces whose buckling is prevented by concrete-filled steel tube. The authors are confident that by adjusting the cross-sectional area and yield point of the brace core steel, the strength and stiffness of structures can be freely designed.

REFERENCE

1. M. FUJIMOTO, A. WADA, E. SAEKI, Y. HITOMI, A. WATANABE : Properties of Brace Encased in Buckling-Restraining Concrete and Steel Tube, Ninth World Conference on Earthquake Engineering, August 1988, Tokyo-Kyoto, Vol. IV, pp. 719-723.

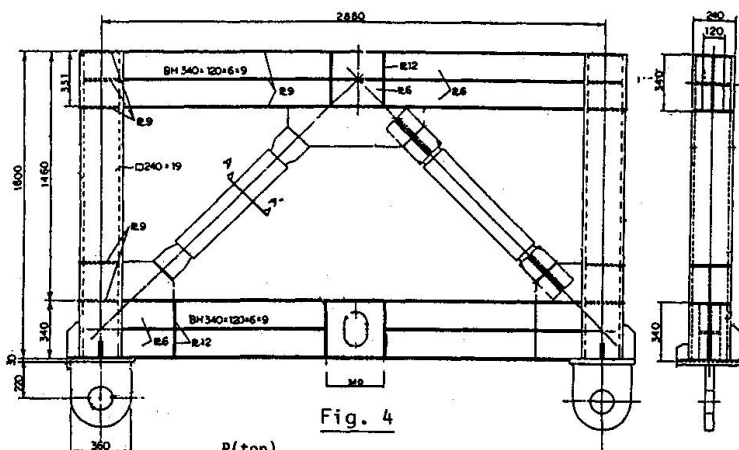


Fig. 4


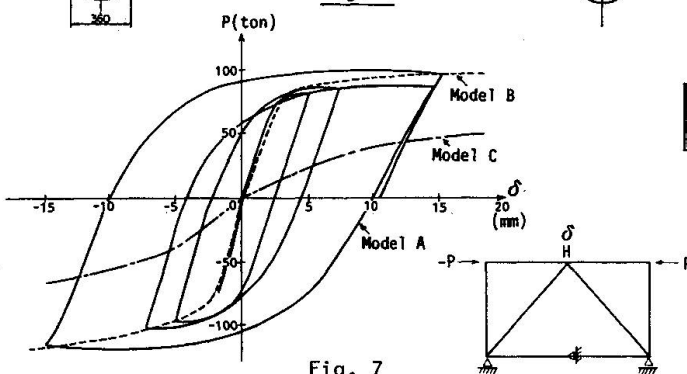


Fig. 7


Table 1 List of Experiment Models

Name	Core Plate			Steel Tube
	Cross-sectional Area (cm ²)	Yield Stress (N/mm ²)	Yield Load (kN)	
Model A	24.64	260.7	642.3	□-150x150x4.5
Model B	14.44	477.3	689.2	□-150x150x4.5
Model C	-	-	-	-



Section A-A'

Fig. 5

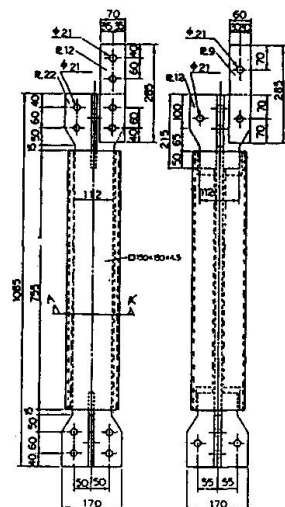

Model A

Fig. 6