

**Zeitschrift:** IABSE reports = Rapports AIPC = IVBH Berichte  
**Band:** 60 (1990)

**Artikel:** Behavior of concrete-filled square steel columns  
**Autor:** Konno, Kazuchika / Kei, Takahiro / Nagashima, T.  
**DOI:** <https://doi.org/10.5169/seals-46484>

### **Nutzungsbedingungen**

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

### **Conditions d'utilisation**

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

### **Terms of use**

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

**Download PDF:** 01.04.2026

**ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>**

# Behavior of Concrete-Filled Square Steel Columns

Comportement de piliers creux carrés remplis de béton

Verhalten von betongefüllten Stahlhohlstützen

**Kazuchika KONNO**

NKK Corporation  
Kawasaki, Japan

**Takahiro KEI**

Takenaka Kumuten  
Tokyo, Japan

**T. NAGASHIMA**

Takenaka Kumuten  
Tokyo, Japan

## SUMMARY

The authors accomplished some experiments on the concrete filled square steel columns subjected to combined axial compression and bending moment. The confining effect between the steel tube and the core concrete, which increases the ultimate strength and ductility of the member, is widely admitted in case of the circular sections. The authors recognized the same effect even in the square sections, and propose a design formula which considers both the local buckling of the square tube and the increase of the concrete strength.


## 1. OUTLINE OF THE EXPERIMENT

The experimental set up is shown in Fig.1. Both ends of the specimens were simply supported and the alternative transverse force was added at the center of the span. Each specimen was also subjected to the constant axial force all through the experiment. The experimental parameters are tabulated in Table 1.

An example of the load-deflection curve is shown in Fig.2. The ultimate strength of the specimens were closely related to the local buckling of the face plate of the steel tube, and it usually occurred prior to the strain hardening region of the steel. However, the ultimate strength of all specimens exceeded the value of the generalized superposed strength (see Table 1), and the specimens had considerable energy absorption capacity even in the range of the large width-to-thickness ratio of the tube and the large axial force.

## 2. ESTIMATION OF THE LOAD BEARING CAPACITY

The strength of the composite member can be estimated by the generalized superposed strength theory. The authors propose to

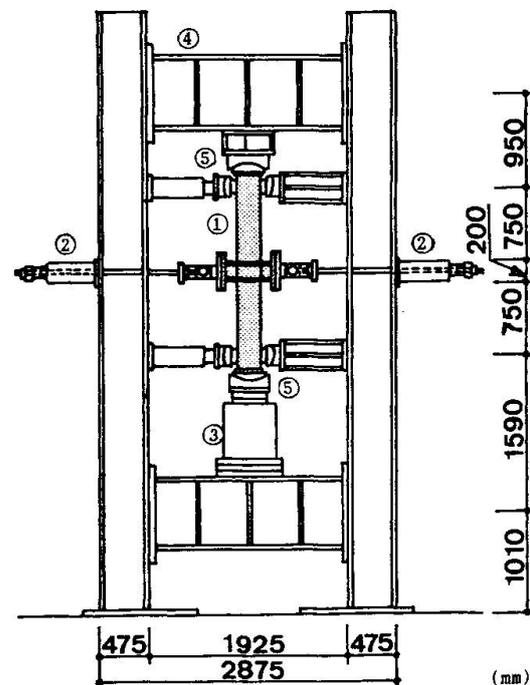

- ① specimen
- ② hydraulic jack for the transverse force
- ③ hydraulic jack for the axial force
- ④ loading frame
- ⑤ pin-roller support

Fig.1 Experimental set up



estimate the strength of the steel part and the concrete part as follows;

- steel part : To consider the effect of the local buckling, the effective width proposed by Foulkner[1] is used. The effective width is estimated by considering the post-buckling strength of the plate with clamped boundaries. It is given by

$$b_e = b \cdot (2.5/\beta - 1.56/\beta^2) , \beta = b/t\sqrt{\sigma_Y/E} \quad (1)$$

where  $b_e$  is the effective width,  $b$  and  $t$  are the width and thickness of the steel tube,  $\sigma_Y$  and  $E$  are the yield point and Young's modulus of the steel.

- concrete part : The confined effect is taken into account by using the following equation.

$$c_f \sigma_B = c \sigma_B \{1 + k(t/b)^2 \sigma_Y / c \sigma_B\} \quad (2)$$

where  $c_f \sigma_B$  is the compressive strength of confined concrete,  $c \sigma_B$  is that of plane concrete. The coefficient  $k$  is decided by compression experiments[2] as  $k=48.8$ . The generalized superposed strength of the specimens estimated by this method are tabulated in Table 1 (Calculation 2). Comparing with the normal generalized superposed strength (Calculation 1), it shows better agreement with the experimental values.

3. CONCLUSION

The confining effect can be considered in the concrete filled square steel tubes. By using the proposed estimation method, the ultimate strength of the section can be estimated in safety side.

REFERENCES

1. D.Faulkner, A Review of Effective Plating for Use in the Analysis of Stiffened Plating in Bending and Compression., Journal of Ship Research, Vol.19, No.1, Mar.1975.
2. Matsumura H. et al, Compressive Strength of Filled Concrete in Square Steel Pipe., Annual Meeting Report of AIJ, October, 1989.

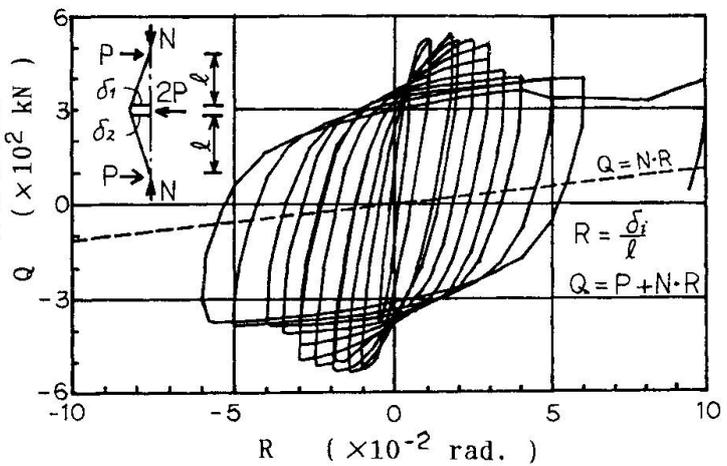


Fig.2 Load-deflection curve of R08M3

Table 1 Experimental parameters and ultimate strength of the specimens

Name of Specimen	Experimental Parameters							Ultimate Strength		
	Square Steel Tube			Filled Concrete			Ratio of the Axial Force *1	by		
	Width B (mm)	Thickness t (B/t) (mm)	Yield Point (N/mm <sup>2</sup> )	Tensile Strength (N/mm <sup>2</sup> )	Compressive Strength (N/mm <sup>2</sup> )	Young's Modulus (kN/mm <sup>2</sup> )		Experiment (kN·m)	Calculation 1 *2 (kN·m)	Calculation 2 *3 (kN·m)
R04L3	250	4.52(55)	357.9	500.1	30.2	23.83	0.3	228.5	198.4	189.7
R06L5		5.76(43)	371.7	543.3	30.2	23.83	0.5	243.2	210.0	228.5
R08L5		7.65(33)	358.9	540.3	30.2	23.83	0.5	275.6	244.8	299.0
R12L5		11.89(21)	316.8	509.0	30.2	23.83	0.5	432.5	298.9	399.7
R04M3		4.52(55)	357.9	500.1	38.0	34.81	0.3	287.3	212.6	203.7
R06M3		5.76(43)	371.7	543.3	38.0	33.83	0.3	347.2	255.0	260.7
R06M5		5.76(43)	371.7	543.3	38.0	34.81	0.5	349.1	226.6	243.4
R08M3		7.65(33)	358.9	540.3	37.0	33.24	0.3	400.1	297.5	325.7
R08M5		7.65(33)	358.9	540.3	38.0	33.83	0.5	413.8	257.5	309.9
R08M7		7.65(33)	358.9	540.3	37.0	33.24	0.7	365.8	178.6	260.9
R12M5		11.89(21)	316.8	509.0	38.0	34.81	0.5	560.0	315.5	411.8
R12M7		11.89(21)	316.8	509.0	38.0	34.81	0.7	451.1	215.5	367.0
R12M3H		11.61(22)	477.6	583.5	38.2	34.81	0.3	716.9	508.6	595.1
R12M5H		11.61(22)	477.6	583.5	38.2	34.81	0.5	634.5	427.3	578.3
R12M7H		11.61(22)	477.6	583.5	38.2	34.81	0.7	577.6	285.5	515.6
R06H5		5.76(43)	371.7	543.3	84.9	43.84	0.5	344.2	317.4	329.0
R08H5		7.65(33)	358.9	540.3	84.9	43.84	0.5	384.4	352.4	393.3
R12H5		11.89(21)	316.8	509.0	84.9	43.84	0.5	490.0	401.9	482.1
R12H7		11.89(21)	316.8	509.0	84.9	43.84	0.7	361.9	291.9	425.4

\*1 N/N0 where N is imposed axial force and N0 is axial yield strength of the composite section

\*2 generalized superposed strength by using  $\sigma_Y$  and  $c \sigma_B$  \*3 generalized superposed strength by proposed method