

Zeitschrift: IABSE reports = Rapports AIPC = IVBH Berichte
Band: 60 (1990)

Artikel: Composite constructions using deformed flange H-sections
Autor: Sato, Masakatsu / Tanaka, Sachito
DOI: <https://doi.org/10.5169/seals-46488>

Nutzungsbedingungen

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

Conditions d'utilisation

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

Terms of use

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

Download PDF: 08.08.2025

ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>

Composite Constructions using Deformed Flange H-Sections

Structures mixtes utilisant des profilés en membrure déformée

Verbundkonstruktionen aus H-Trägern mit verformten Flanschen

Masakatsu SATO

Dr. of Eng.
Kawasaki Steel Corp.
Chiba, Japan

Sachito TANAKA

Senior Researcher
Kawasaki Steel Corp.
Chiba, Japan

1. INTRODUCTION

It is of primary importance that a steel and concrete composite structure be provided with an effective stress transmission mechanism in its steel-concrete interface. In 1977, Kawasaki Steel Corp. developed a new form of rolled H-shape for composite constructions. This H-shape has a lateral projection on the outer surface of both flanges in order to increase the bond strength between steel and concrete, as with deformed bars, so it might be called the "deformed flange H-shape". The lateral projections plays the role of deformed bars in the steel framed reinforced concrete(SRC) girder and mechanical shear connectors in composite bridge as shown in Fig.1.

2. DEFORMED FLANGE H-SHAPES

Deformed flange H-shapes of up to 900mm height in the narrow flange series and 400mm height in the wide flange series can be furnished. 2.5mm and 19mm are adopted as lateral projection height and space on surface of deformed H-shapes, respectively.

The bond strength on the outside surface to concrete is more strongly than the large-diameter deformed bar D51. This type of H-shape also keeps the cracking to a minimum, and is strongly resistant to corrosion.

3. SRC GIRDERS

Prefabricated members were manufactured beforehand in which the lower portions of deformed flange H-shapes were covered with expansive concrete, as shown in

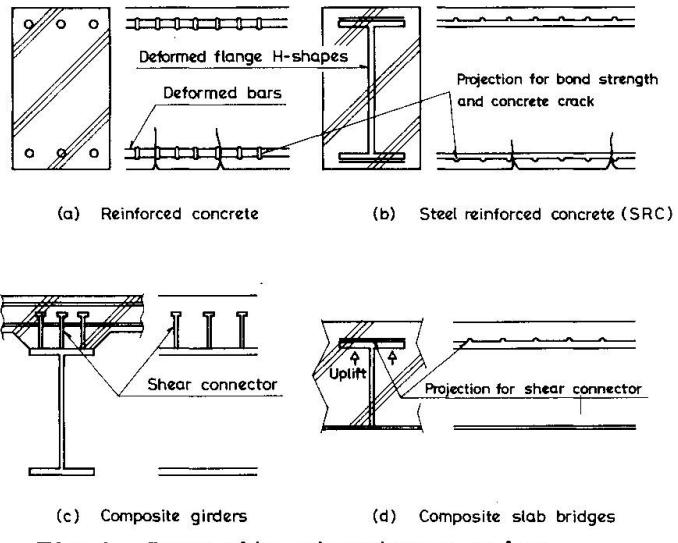


Fig.1 Composite structures using deformed flange H-shape



Fig.2. Then these prefabricated members were elected on the pier. After distributive deformed bars were laid, slab concrete was carefully placed. The steel frame and concrete were considered to bonded into a single unit by projections on the surface of H-shape. This type of composite construction has been applied in gay construction in Japan since 1978.

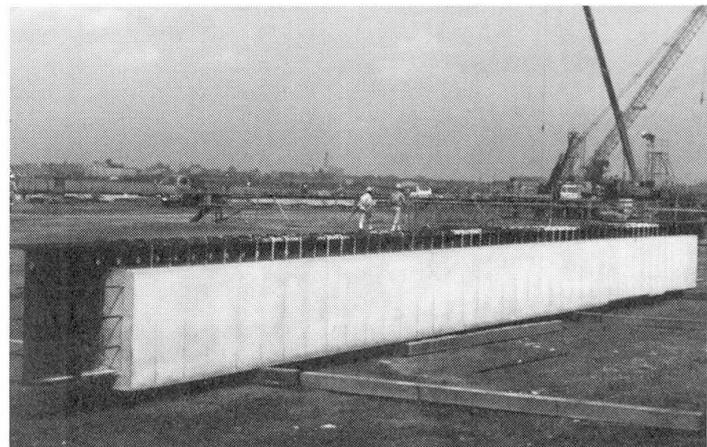


Fig.2 Prefabricated member of SRC girder

4. COMPOSITE SLAB BRIDGES [1]

A New-type composite slab bridges made by filling up the CT-shapes (cutting in half the new H-shapes) with expansive concrete, as shown in Fig.3, has been used for road bridge. The depth of this bridge can be made lower than that of composite girder and prestressed concrete girder. Since the commencement of sales for this slab bridge in 1982, more than fifty bridges have been completed as a result of river improvement and hollow type composite slab bridge has been developed for longer span.

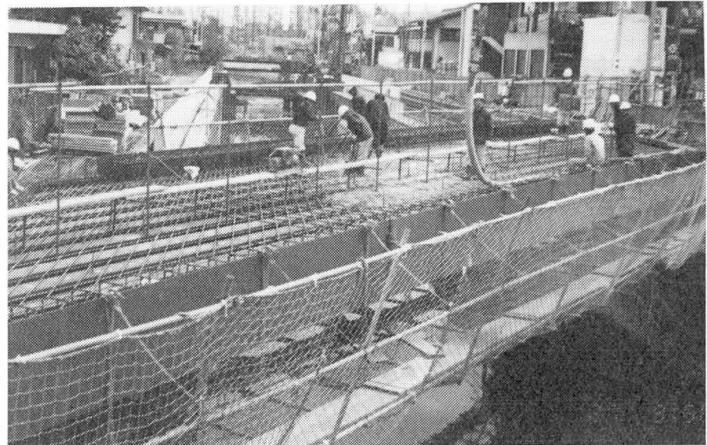


Fig.3 Placing expansive concrete on composite slab bridge

5. SRC BRIDGE PIERS

SRC high bridge piers using deformed flange H-shapes have been in practical use. Fig.4 is a shot of piers under construction in highway bridge and their height are about 40m. In this case, deformed H-shapes were also used as supports for the metal panels for concrete forms.

REFERENCE

1. YAMASAKI T. et al, Composite Slab Bridge using Deformed Flange T-shapes. IABSE 12th Cong., p:385~392, August 1984.

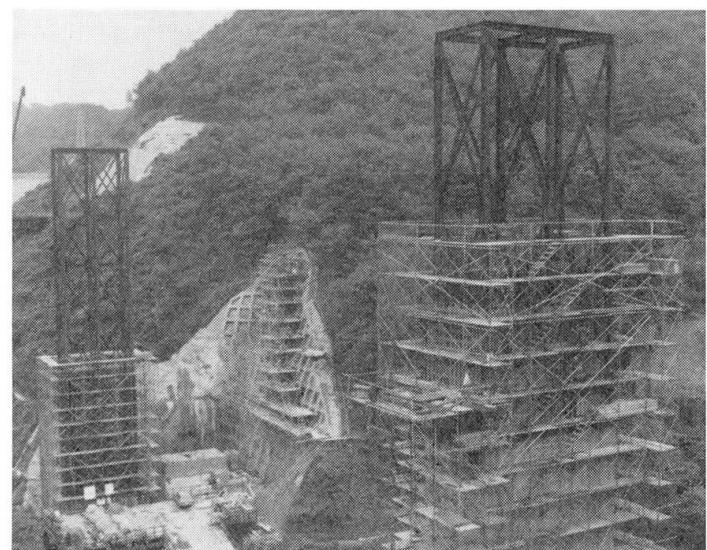


Fig.4 Under construction on SRC bridge pier