

Zeitschrift: IABSE reports = Rapports AIPC = IVBH Berichte
Band: 60 (1990)

Artikel: Partially anchored composite cable-stayed bridge
Autor: Otsuka, Hisanaro / Tanaka, Hiroshi / Noguchi, Jiro
DOI: <https://doi.org/10.5169/seals-46504>

Nutzungsbedingungen

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

Conditions d'utilisation

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

Terms of use

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

Download PDF: 01.04.2026

ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>

Partially Anchored Composite Cable-Stayed Bridge

Pont haubané mixte à ancrage partiel

Teilweise verankerte Schrägkabelbrücke mit Verbundträgern

H. OTSUKA

Assoc. Prof.
Kyushu Univ.
Fukuoka, Japan

Hisanori Otsuka, born 1948, got his Dr. Eng. degree at Kyushu Univ. His research interests include structural analysis of bridges.

H. TANAKA

Assist. Manager
Hitachi Zosen
Osaka, Japan

Hiroshi Tanaka, born 1949, got his M.Sc. degree at Kyoto Univ. He has been engaged in designing and research of steel bridges.

J. NOGUCHI

Section Mgr
Sogo Eng. Inc.
Osaka, Japan

Jiro Noguchi, born 1951, got his M.Sc. degree at Osaka City Univ. He has been engaged in design of steel bridges.

T. ETOH

Assist. Chief
Mitsui Co. Ltd.
Osaka, Japan

Tetsuroh Etoh, born 1949, got his B.Sc. degree at Kyushu Univ. He has been engaged in design and erection of steel bridges.

I. SAKAI

Section Mgr
Sumitomo Co.
Ltd.
Osaka, Japan

Itsuro Sakai, born 1948, got his B.Sc. degree at Kyoto Univ. He has been engaged in design & research of concrete bridges.

SUMMARY

Compared to the self-anchored type, partially anchored cable-stayed bridges are more efficient for long span bridges because the axial forces in the main girders are decreased. Mixed girders are suitable in partially anchored systems because either axial compression or axial tension acts in the main girders depending on girder location along the bridge length. This paper treats one design example of a composite cable-stayed bridge with a 900 m center span and 300 m side spans.

RÉSUMÉ

En comparaison du type à auto-ancrage, l'ancrage partiel s'avère plus efficace pour les ponts haubanés à grande portée, car les forces axiales s'exerçant dans les poutres maîtresses diminuent. Les poutres mixtes sont mieux indiquées dans le système à ancrage partiel, étant donné que les efforts axiaux de compression ou de tension dans les poutres maîtresses dépendent de leur disposition le long du pont. Cet article présente un exemple de calcul de pont haubané à ancrage partiel, ayant une travée centrale de 900 m de portée et des travées latérales de 300 m de portée.

ZUSAMMENFASSUNG

Die teilweise verankerten Schrägkabelbrücken weisen gegenüber den voll verankerten Vorteile auf, da die Normalkräfte im Hauptträger kleiner sind. Verbundträger eignen sich speziell für teilweise verankerte Systeme, da die Längszug- (oder -druck)kräfte in den Hauptträgern wirken. Dieser Beitrag beschreibt eine Schrägkabelbrücke mit Verbundträgern mit 900 m Haupt- und 300 m Nebenspannweiten.



1. INTRODUCTION

Cable-stayed bridges are classified into three types according to the degree of anchoring used. These are self, fully, and partially anchored cable-stayed bridges. Using simple structural models for cable-stayed bridges (each anchorage type) and suspension bridges, cost comparisons show that partially anchored cable-stayed bridges are most efficient for span lengths up to about 2000 m (Refs. 1-3).

Partially anchored systems may be constructed either by using hinges which can not transmit axial forces into center or side spans, or by introducing pulling forces to the continuous main girders from the ends of the side spans. Anchorages are necessary in both types of partially anchored systems.

In partially anchored systems, the main girders in the vicinity of towers are in axial compression, while axial tension acts in the main girders in the middle parts of the center span and at the end parts of the side spans. From a material standpoint, composite main girders made of a steel member and a PC member may therefore be more efficient compared to conventional steel main girders or prestressed concrete main girders. Further investigations on partially anchored composite cable-stayed bridges are necessary for determining the validity of this hypothesis (Ref. 5).

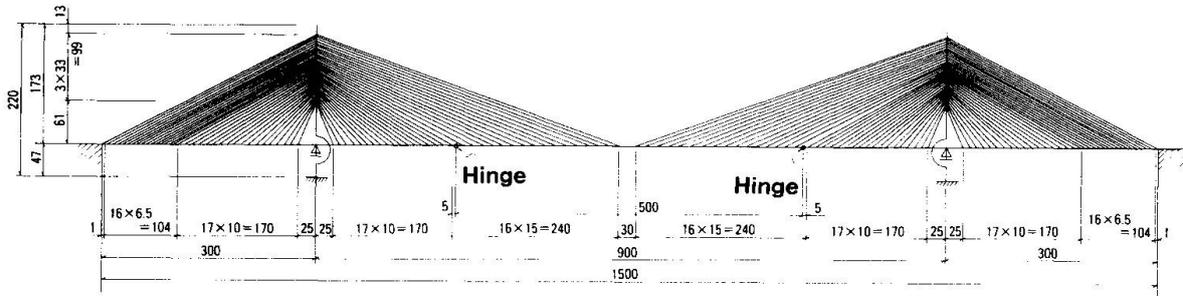


Fig.1 General View of Model Bridge



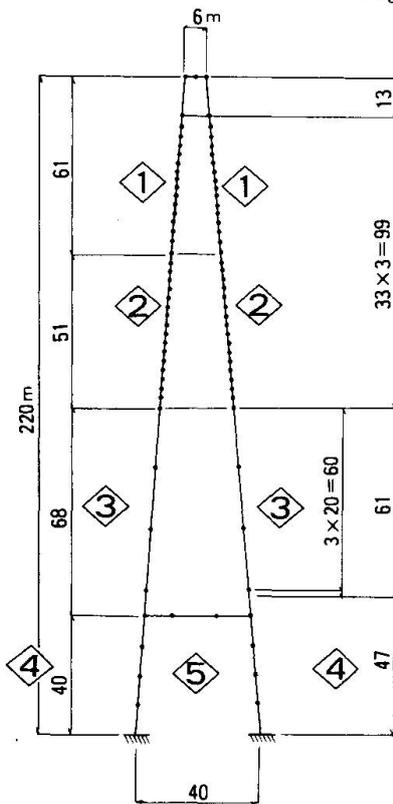


Fig.2 Tower

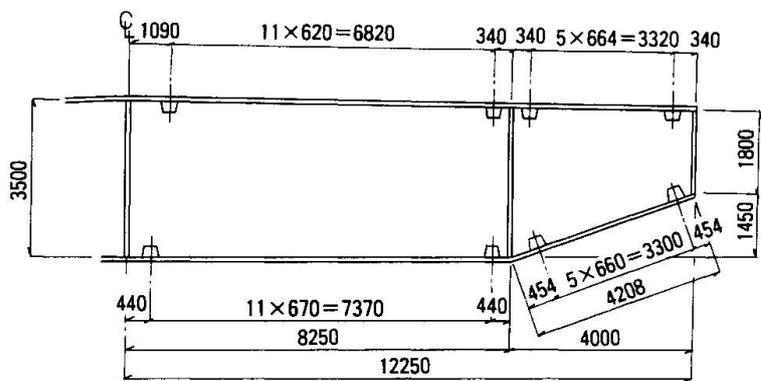

(a) Metal Girder

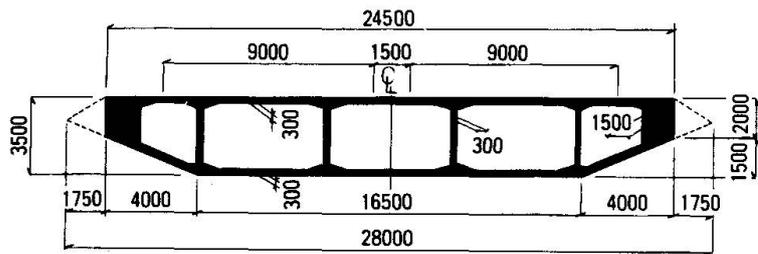

(b) PC Girder

Fig.3 Cross Sections

This paper shows one design example of a composite cable-stayed bridge with a 900 m center span and 300 m side spans. These numerical results are compared to those of a self anchored cable-stayed bridge. The two types of partially anchored cable-stayed bridges considered here (i.e. hinge type and continuous girder type) are compared from the viewpoint of constructing method.

2. STRUCTURAL MODEL

Figs. 1, 2, and 3 show a general view of the hinge type bridge, towers, and cross sections, respectively, of the composite cable-stayed bridge treated in this paper. Typical cross-section properties and load values are listed in Table 1. Steel main girders are used between two hinges. The cable-stayed bridges are idealized as plane structures and analyzed using matrix structural theory.

3. ANALYSIS RESULTS

Fig.4 shows bending moments and axial forces in the main girders for the self and partially anchored systems caused by both dead loads and prestressing forces in cables. Bending moments are almost same for both anchoring systems_ but axial compression in the partially anchored system is about 53 % less than that of the self anchored system. Variations of bending moments from D+L(-) to D+L(+) in the partially anchored system are smaller than those of the self anchored system as shown in Fig.5. On the other hand, the corresponding variation of axial force in the partially and self anchored systems is almost same and small as shown in Fig.6.

Table 2 shows internal forces and longitudinal movements at the hinges. To dampen the longitudinal movements produced by earthquakes, oil dampers will be inserted at the hinge locations. Axial forces at hinges are caused by the special links inserted for analysis in this example, but in actual structures these values are almost zero. Hinge design for partially anchored systems is relatively easy.

Reacting forces at the anchorages are shown in Table 3. By optimizing the shape of anchorages constructed for partially anchored cable-stayed bridges, the cost of anchorages may be decreased compared to the conventional type used for suspension bridges.

Table 1 Characteristics of Cross Sections & Dead Load

Members		A (m ²)	I _z (m ⁴)	I _y (m ⁴)	D (tf/m)
Main Girders	Steel	1.13	2.52	62.2	18
	PC	20.0	30.0	800.0	60
Towers	1	1.32	9.1*	2.9**	22
	2	2.08	15.9*	4.6**	34
	3	2.24	18.8*	5.0**	34
	4	2.58	23.3*	5.8**	42
	5	0.70	2.9	2.9	21
Cables	I	0.024	—	—	0.019
	II	0.022	—	—	0.017
	III	0.020	—	—	0.016

A : Area of cross section

I_z, I_y : Moment of Inertia in and out of plane, respectively

* for two columns, ** for one column, 1 tf = 9.81 kN

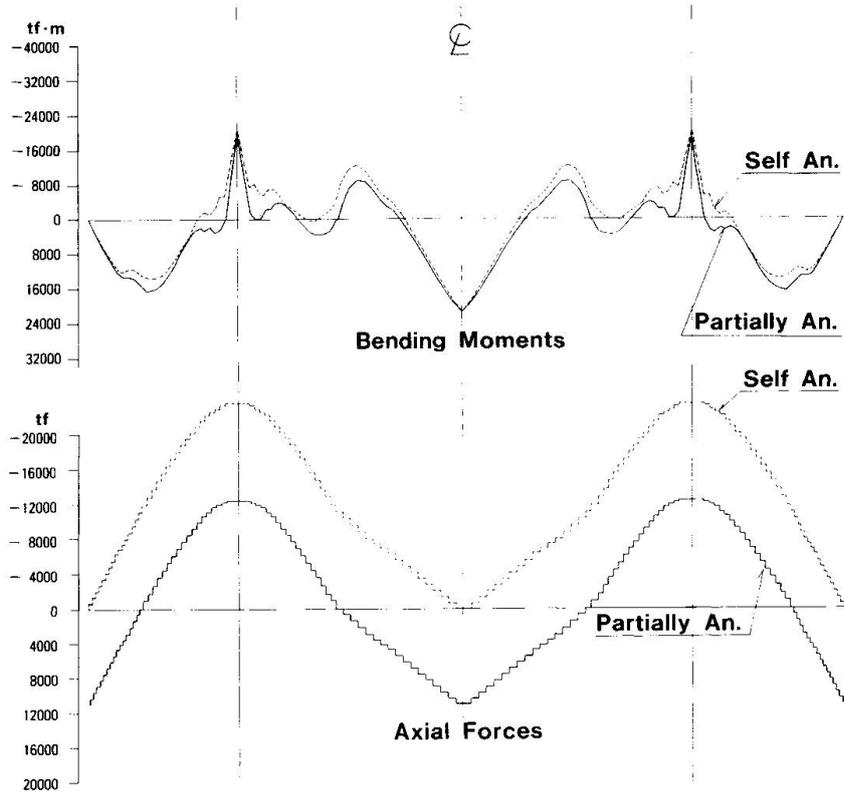


Fig.4 Bending Moments and Axial Forces (1 tf·m = 9.81 kN.m)

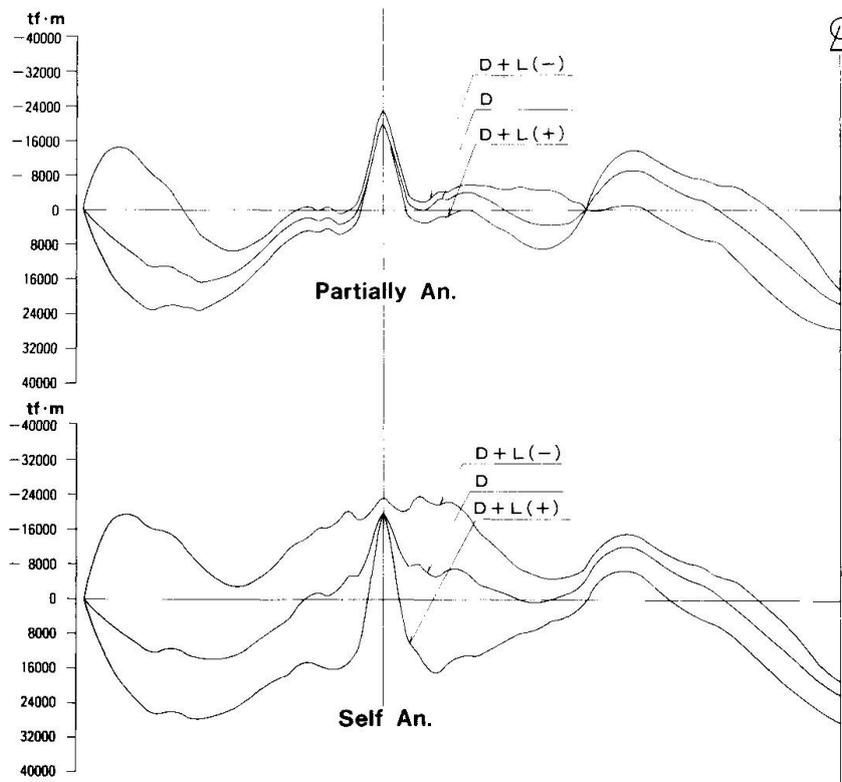


Fig.5 Variations of Bending Moments (1 tf·m = 9.81 kN·m)

Table 3 Reacting Forces at Anchorages

Load Case	Reacting Forces
Dead Load + Prestressing	Rx = 10998 tf, Ry = 174 tf
Temperature($\pm 35^{\circ}\text{C}$)	Rx = ± 466 tf, Ry = ± 13 tf
Live Load	Rx = 2107 tf(max), 519 tf(min) Ry = 519 tf(max), -1032 tf(min)
Wind Load (Trans.)	Rz = -256 tf, Mx = -2641 tf·m My = 43747 tf·m
Earthquake (Trans.)	Rz = -2501 tf, Mx = -17588 tf·m My = 260428 tf·m
Earthquake (Longi.)	Rx = ± 4932 tf, Ry = ± 948 tf

x : longitudinal direction, z : transverse direction
y : vertical direction, 1 tf = 9.81 kN

4. ALTERNATIVE DESIGN

The hinges inserted in partially anchored systems would be rather expensive and would disturb the smooth driving of vehicles. Furthermore, from the viewpoint of constructing the girder, it may be difficult to expand the main girders beyond the hinges.

Partially anchored cable-stayed bridges without hinges can be accomplished by pulling the main girders from anchorage side after completing the continuous main girders. According to the Specifications for Japanese Highway Bridges, allowable stresses can be increased 25 % during the construction stages. Furthermore, it is easy to change prestressing values in PC main girders. Therefore, this type of partially anchored system becomes an attractive alternative design plan. After pulling main girders, total system behaves like a self anchored system due to the continuity of main girders. However, since bending stresses due to live loads are small compared to axial stresses, the advantages of the partially anchored system are realized in this system.

REFERENCES

- 1) GIMSING, N.J., Cable Systems for Bridges, Proc. of 11th Congress of the IABSE, Vienna, Austria, 1980, pp.727-732.
- 2) GILSANZ, R.E., Cable Stayed Bridges: Degrees of Anchoring, Proc. of ASCE, Journal of Stru. Eng., Vol.109, No.1, January, 1983, pp.200-220.
- 3) OTSUKA, H., et.al., Optimum Anchoring for Long Span Cable-Stayed Bridges, Proc. of JSCE, Struc.Eng.&Earthq. Eng., Vol.1, No.2, Oct., 1984, pp.201s-209s.
- 4) OTSUKA, H., et.al., Static and Dynamic Characteristics of Partially Anchored Cable-Stayed Bridges, Proc. of the Recent Advances in Stru. Eng., Bangkok, Thailand, 1985, pp.335-351.
- 5) OTSUKA, H., et.al., Optimization of Girder Supporting Systems and Materials in Composite Cable-Stayed Bridges, Composite Construction in Steel and Concrete, ASCE, 1988, pp.226-239.

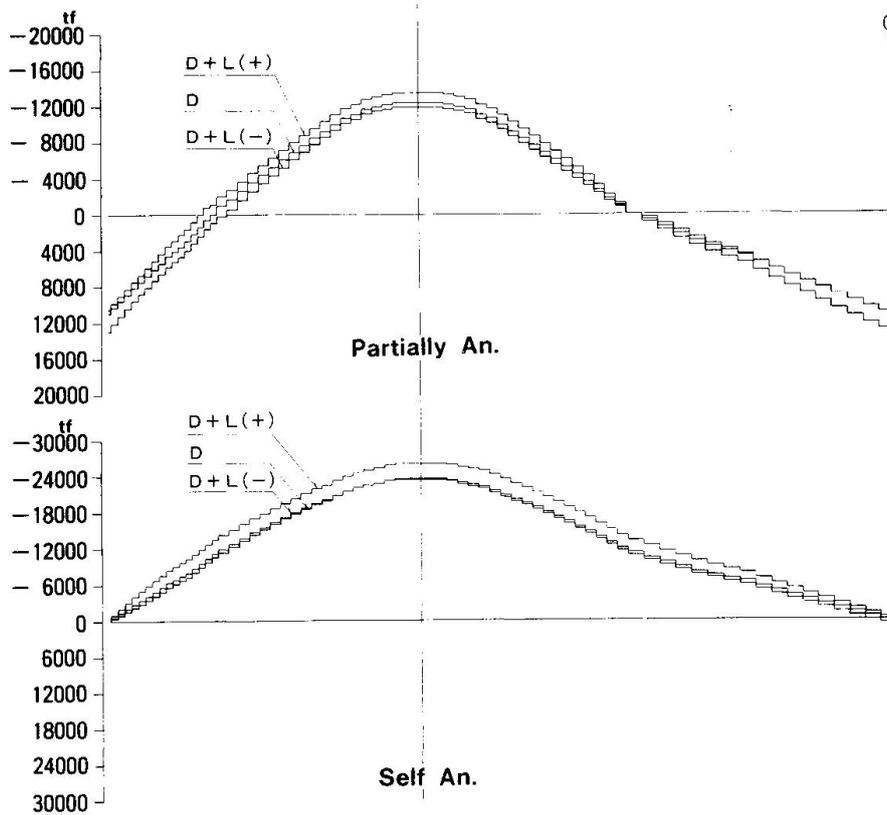


Fig.6 Variations of Axial Forces (1 tf = 9.81 kN)

Table 2 Internal Forces & Longitudinal Movements at Hinges

Load Case	Internal Forces	Movements (mm)
Dead Load + Prestressing	S = 267 tf	22
Temperature ($\pm 35^{\circ}\text{C}$)	S = 231 tf	± 308
Live Load	S = 95 tf	± 273
Wind Load (Transverse Direction)	S = 530 tf T = 1887 tf·m M = -781 tf·m	0
Earthquake (Trans.)	S = 2755 tf T = -3746 tf·m M = -24632 tf·m	0
Earthquake (Longi.)	N = ± 771 tf	± 1024

S = Shearing Force, T = Torque, M = Bending Moments,
N = Axial Forces, 1 tf = 9.81 kN