

Zeitschrift: IABSE reports = Rapports AIPC = IVBH Berichte
Band: 64 (1991)

Artikel: Railway bridge with double composite action across river Main
Autor: Saul, Reiner / Zellner, Wilhelm
DOI: <https://doi.org/10.5169/seals-49361>

Nutzungsbedingungen

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

Conditions d'utilisation

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

Terms of use

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

Download PDF: 04.04.2026

ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>



Railway Bridge with Double Composite Action across River Main

Pont-rail en structure mixte sur le Main

Eisenbahnbrücke mit Doppelverbund über den Main

Reiner SAUL

Senior Supervising Engineer

Wilhelm ZELLNER

Managing Director

Leonhardt, Andrä & Partner GmbH
Stuttgart, FRG

DESIGN

The double track railway bridge across the River Main at Nantenbach will link the new highspeed railway line Hannover-Würzburg to the existing trunk line Würzburg-Aschaffenburg. Due to local conditions, the bridge has a main span of 208 m, a slope of 12.5 ‰ and a radius of 2650 m.

Based on the investigation of numerous alternates, a continuous truss girder with spans of 83.2 – 208 – 83.2 = 374.4 m was found to be the best solution from economic, ecologic and aesthetic point of view, Fig.1, 2. The construction depth varies between 8.5 m at ζ and the abutments and 16.5 m at the main piers, corresponding to slenderness ratios of 1:24 and 1:13, respectively.

The cross-section, s.Fig.3, consists of

- the truss girders in a mutual distance of 6.0 m and with a spacing of 10.4 m;
- the top slab of reinforced concrete, which corresponds to the »Rahmenplanung für Talbrücken« (Masterplanning for valley bridges);
- the bottom chord, of steel in the center of the mid span and of concrete at the piers and in the side spans. The concrete bottom chord limits economically the deformations and makes that fatigue considerations do not govern the dimensioning.

The steel weight is 3300 t or 620 kg/m².

CONSTRUCTION

The construction started in early 1991 and is scheduled to be finished in late 1993. The site spans will be erected on auxiliary piers. After pouring of the bottom chord concrete, the center part of the main span, with a length of 120 m and a weight of about 1100 t, will be floated in and lifted. After closure of the center joint, the top slab is poured from ζ towards the abutments.

ACKNOWLEDGEMENT

Owner is the German Federal Railway Administration, Nürnberg Division (Deutsche Bundesbahn, Direktion Nürnberg). The design and the tender documents were prepared by Leonhardt, Andrä & Partner GmbH, Stuttgart, Germany. The construction consortium is formed by Noell, DSD and Buyck for the steel structure; Strabag and Hochtief for the concrete slabs; and Max Streicher for the foundations and approach bridges.



Fig. 1: General Layout

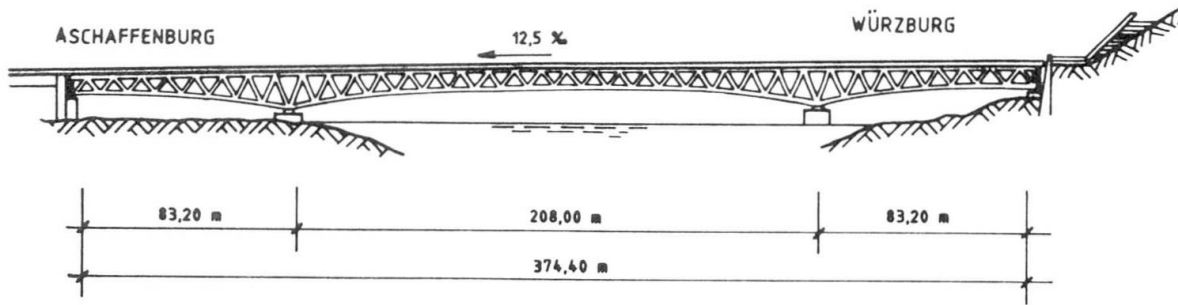


Fig. 2: Foto of model

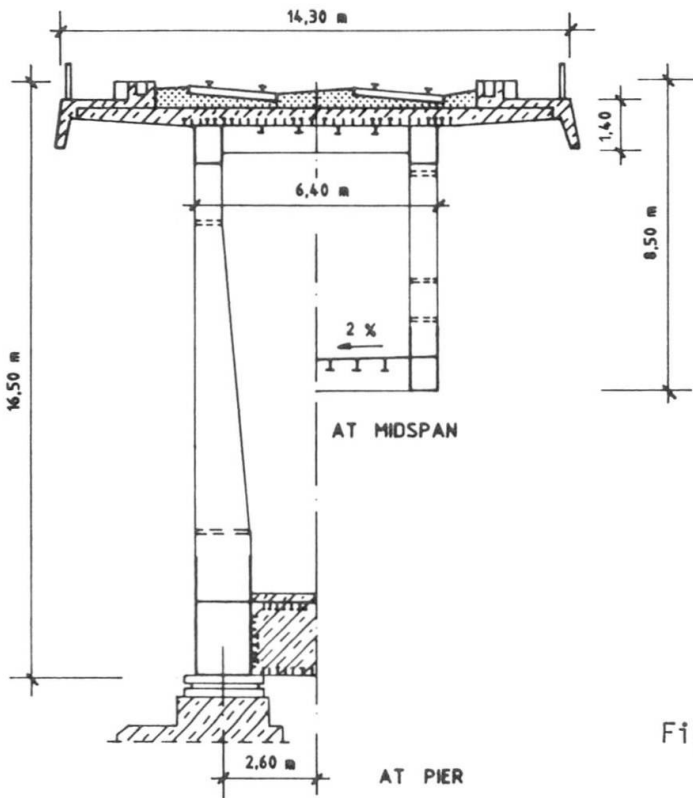
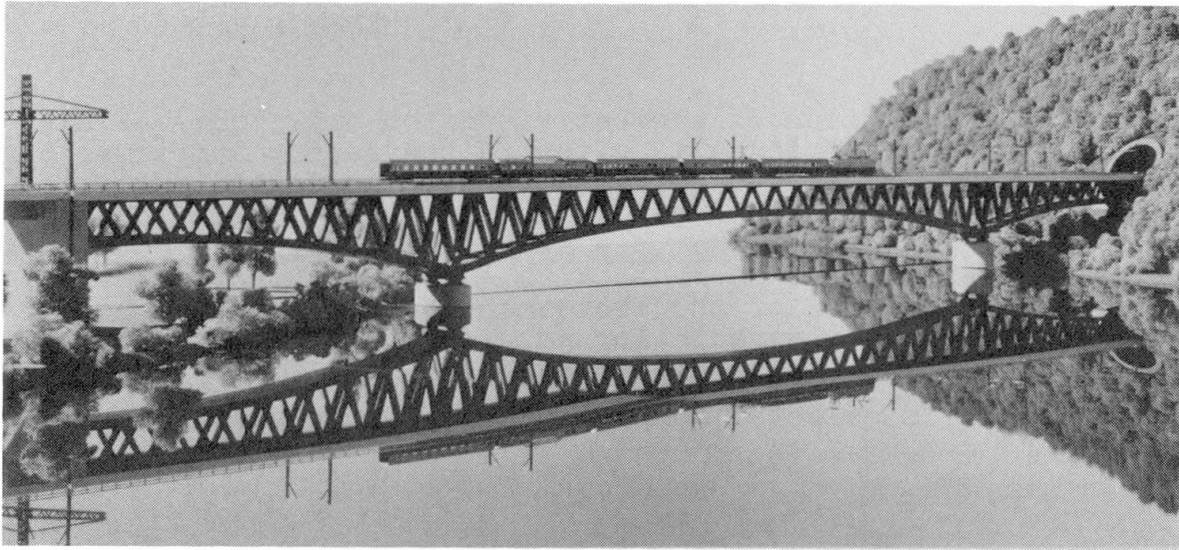


Fig. 3: Cross-section at ζ