

**Zeitschrift:** IABSE reports = Rapports AIPC = IVBH Berichte  
**Band:** 64 (1991)  
  
**Artikel:** Construction control system for cable-stayed bridges  
**Autor:** Sakai, Fujikazu / Isoe, Akira / Umeda, Akira  
**DOI:** <https://doi.org/10.5169/seals-49288>

### **Nutzungsbedingungen**

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

### **Conditions d'utilisation**

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

### **Terms of use**

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

**Download PDF:** 05.09.2025

**ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>**

## **Construction Control System for Cable-Stayed Bridges**

**Système pour le contrôle de la construction des ponts haubanés**

**Baukontrollsystem von Schrägseilbrücken**

### **Fujikazu SAKAI**

Kawasaki Heavy Ind. Ltd.  
Tokyo, Japan

Fujikazu Sakai, born 1941, received the degree of B.E., M.E. and Dr. Eng. (1970) from the Univ. of Tokyo. He is engaged in research and development of bridges as a senior manager.

### **Akira UMEDA**

Kawasaki Heavy Ind. Ltd.  
Tokyo, Japan

Akira Umeda, born in 1960, received the degree of B.E. and M.E. (1986) from Kyoto Univ. He is research engineer in the Engineering Dep.

### **Chiaki MORIMOTO**

Kawasaki Heavy Ind. Ltd.  
Tokyo, Japan

Chiaki Morimoto, born in 1945, received the degree of B.E. and M.E. (1970) from Kanazawa Univ. He is a section manager in the Bridge Design Dep.

### **Akira ISOE**

Kawasaki Heavy Ind. Ltd.  
Tokyo, Japan

Akira Isoe, born in 1954, received the degree of B.E. and M.E. (1980) from Osaka Univ. He is a senior research engineer in the Engineering Dep.

### **Yoshihiko MIZUKAMI**

Kawasaki Heavy Ind. Ltd.  
Tokyo, Japan

Yoshihiko Mizukami, born in 1947, received the degree of B.E. and M.E. (1972) from Kanazawa Univ. He is a section manager in the Planning Dep.

### **Masatoshi YAMADA**

Kawasaki Heavy Ind. Ltd.  
Tokyo, Japan

Masatoshi Yamada, born in 1947, received the degree of B.E. (1970) from Kyoto Univ. He is a senior engineer in the Erection Dep.

## **SUMMARY**

In the case of long-spanned bridges such as cable-stayed bridges, it is very important to fulfil the criteria of construction accuracy both during construction and at completion. In this paper the authors present a new methodology to execute systematically the control of construction accuracy, which consists of measurement, identification, prediction and modification.

## **RESUME**

Dans le cas de ponts de grande portée, par exemple pont haubané, il est très important de respecter le critère de précision au cours de la construction et à l'achèvement des travaux. L'article présente une nouvelle méthodologie permettant d'exécuter systématiquement le contrôle de la précision dans la construction, dépendant de mesure, identification, prédiction et modification.

## **ZUSAMMENFASSUNG**

Für weitgespannte Brücken wie Schrägseilbrücken ist es von grosser Bedeutung, Kriterien der Baugenauigkeit sowohl während des Montagezustandes als auch im Endzustand einzuhalten. In diesem Beitrag ist eine neue Methodologie zur Durchführung der systematischen Kontrolle der Baugenauigkeit dargestellt. Sie setzt sich aus Messung, Identifikation, Vorhersage und Ausführungsänderung zusammen.



## 1. INTRODUCTION

Bridges are completed through construction processes of designing, fabrication and erection. In those processes many kinds of error arise for various reasons. From the standpoint of treating accuracy control analytically, we need to classify these errors into error factors and resultant errors. The formers are defined as origins of the latters, and reversely the latters are defined as configuration and stress errors in the consequence of the formers.

The authors previously conducted theoretical investigation in relation to the prediction of resultant errors and the identification of error factors [1-3]. The prediction is defined here to obtain what errors of configuration and stress the error factors generate. On the other hand the identification is defined to obtain the error factors included inside the structures from the measured data of resultant errors of configuration and stress at each stage of erection.

In this paper first a new control procedure by combining the identification and the prediction is proposed for keeping construction accuracy of cable-stayed bridges.

Second the method proposed here is compared with the conventional try-and-error method in the actual case of Bannaguro Bridge, which was completed at 1990. The compared results are considerably satisfactory in that these are obtained more rationally and speedily than from the conventional method.

## 2. METHOD OF CONTROL

Here we present a new method to control construction accuracy by using the flow-chart shown in Fig. 1.

### 2.1 In process of designing and fabrication

First the designed values of the configuration and stress at each stage of erection are calculated by the backward procedure of structural analysis. But actually the deviations from the designed values arise at each stage of erection. Therefore in designing the deviations should be considered, but in the conventional method the basis of magnitude of the deviations has not been clarified. Here through the stochastic investigation of various error factors and the analysis of influence of the error factors for the resultant errors, the magnitude of the deviations and the accuracy allowance are decided. Adding to it, the primal error factors are classified among the error factors, and the measurement terms which are needed to identify the primal error factors are selected [2, 3].

### 2.2 In process of erection

First at each stage of erection we can obtain measured data such as the configurations of girder and tower, the cable tensions, the reactions of pier and bent. The measured data must be corrected considering the temperature. Next from the obtained resultant errors the primal error factors are identified by the least squares method. In this case to use together the resultant errors at the preceeding stages is effective for compensating the shortage of the data and cancelling the measurement errors, and Kalman's filtering theory is applied.

Next from the primal error factors the resultant errors at the succeeding stages are predicted by the stochastic finite element method to grasp what influence the present errors give. If the resultant errors at the present stage

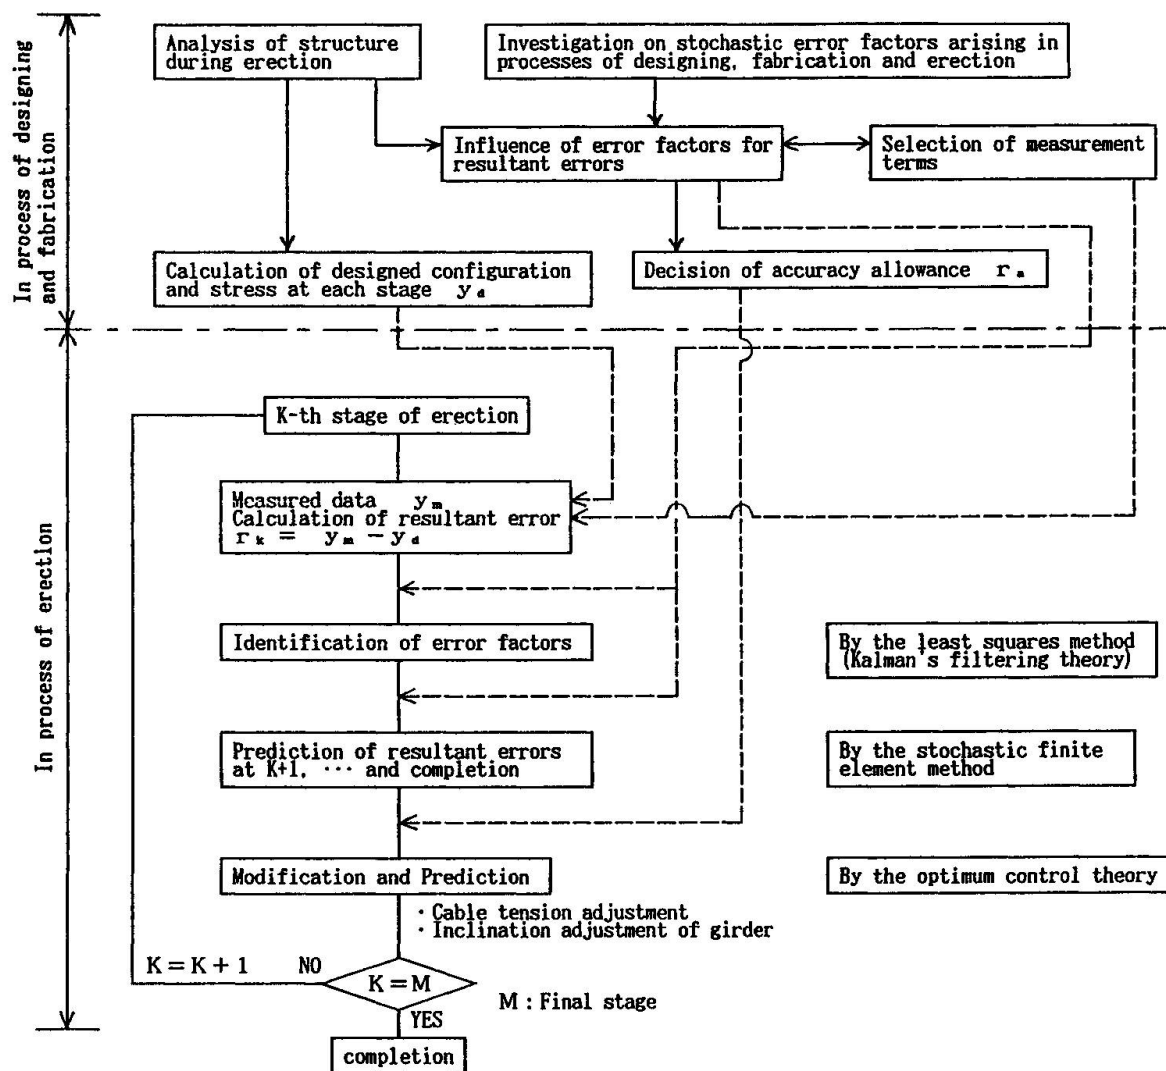


Fig. 1 Flow-chart of method for accuracy control

or the succeeding ones are greater than the allowance, some modification of configuration and stress is needed. For the modification the adjustment of cable tensions or joint inclinations of girder is conducted. In this case the optimum control theory is applied to determine the optimum adjustment for the objective stage.

### 3. ACTUAL CASE OF BANNAGURO BRIDGE

The method was actually applied to the erection of Bannaguro bridge shown in Fig. 2, which is a two span continuous cable-stayed bridge with single-plane multiple cables. The erection started in May 1988 and finished in December 1989.



### 3.1 Erection procedure

Frist the side-span was constructed, and the tower was erected with a truck crane on it. Next the construction of the main girder proceeded by the cantilever erection method. One segment was installed with the truck crane and supported by two cables as shown in Fig. 2. This procedure is repeated fundamentally.

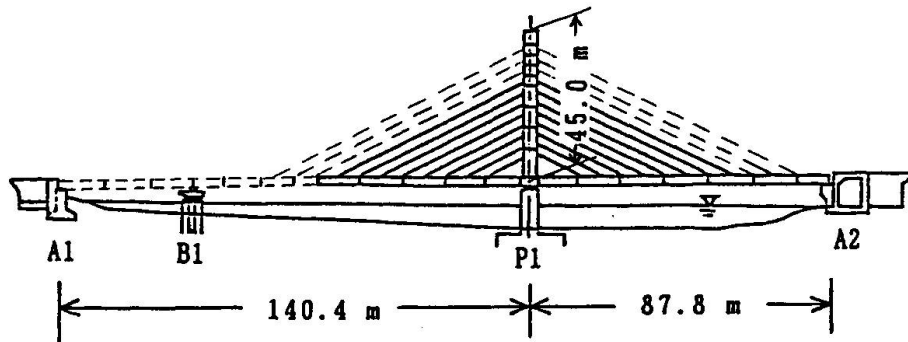


Fig. 2 Erection of Bannaguro Bridge (13th and final stages)

### 3.2 Results

As an example let us explain the control of construction accuracy after the 13th stage of erection shown in Fig. 2.

**Measured data at 13th stage** Fig. 3 shows the measured data of configuration and cable tension. From the figure it is found that the values of some cable tensions were 80-100 tons greater than the designed values and the configuration at the cantilever end of the main girder was about 100 mm upper to the designed ones.

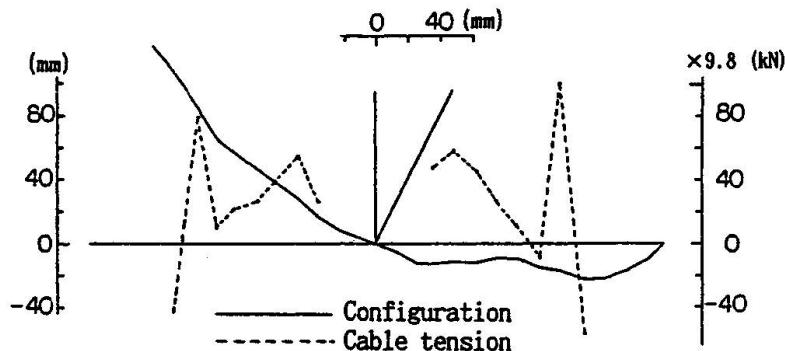


Fig. 3 Measured resultant errors (at 13th stage)

**Identification and Prediction** From the measured data the primal errors were identified to be the cable lengths and the joint inclinations of the girder shown in Fig. 4. We found that some cables were short and the initial configuration of girder was below the designed values. Next from the results the configuration and the cable tensions at completion were predicted as shown in Fig. 5. Here the error factors at the succeeding stages were considered with some standard deviation. From the figure we grasped that the values of some cable tensions might be greater than the accuracy allowance at completion.

**Modification** From the predicted results we found some modification of cable tensions is needed to keep the criteria of construction accuracy at completion. However, it was judged that all cables would be still enough safe.

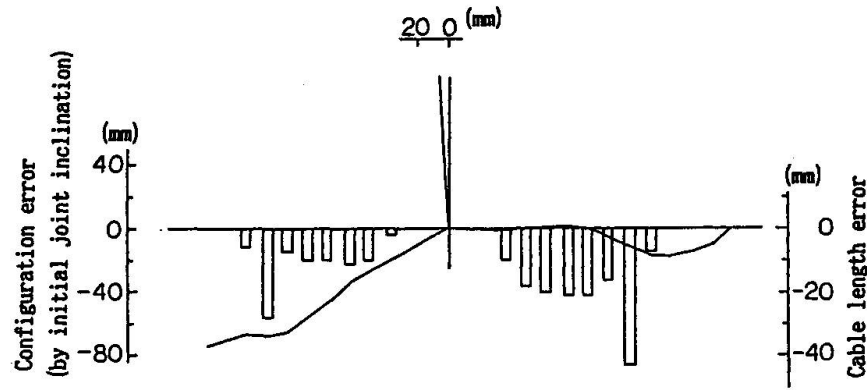


Fig. 4 Identified error factors

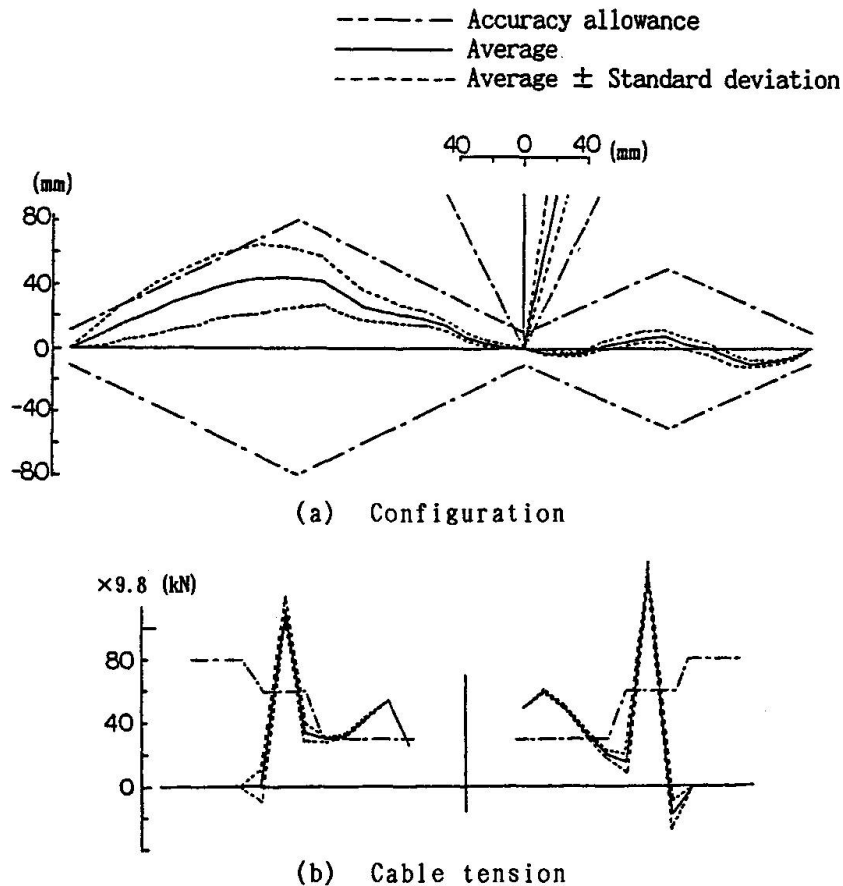


Fig. 5 Predicted resultant errors (at completion)

Therefore in actual no modification was conducted at the 13th stage, and after finishing the erection of cables the adjustment of cable tensions was done at the 18th stage, at which the girder reached the bent B1. To determine the adjustment of cable tensions, we applied the optimum control theory. After modification the succeeding girder erection was done to reach the pier A1. Fig. 6 shows the measured and predicted values of configuration and cable tensions at completion. From the figure it can be seen that the resultant errors at completion are within the accuracy allowance, and that the predicted values are almost similar but a little different compared with the measured ones. The difference seems to be caused by the error factors at the girder erection of the succeeding stages.

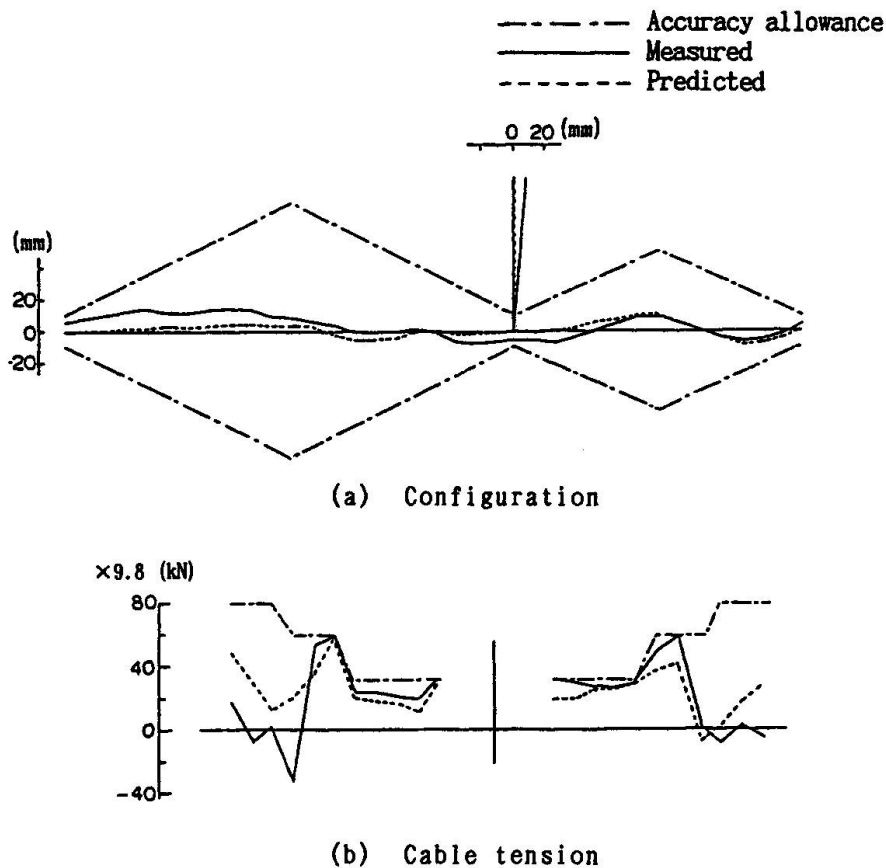


Fig. 6 Resultant errors (at completion)

#### 4. CONCLUSIONS

In this paper the authors presented a new methodology to execute systematically the control of construction accuracy. A routine of measurement, identification, prediction and modification, which is iterated at each stage of erection, is utilized for improving the accuracy of the succeeding stages. The method was applied to the erection of Bannaguro Bridge and compared with the conventional one. The results could be obtained more rationally and speedily than from the conventional method.

#### REFERENCES

1. K. TAKEMURA and F. SAKAI, Estimation of Construction Accuracy of Steel Bridges, Proc. IABSE Symp., Tokyo, Japan, Sept., 1986.
2. F. SAKAI and A. UMEDA, Prediction and Identification to Control Construction Accuracy of Cable-stayed Bridges, Proc. of EASEC-2, Chiang Mai, Thailand, Jan., 1989.
3. F. SAKAI and A. UMEDA, Structure Error Identification for Control of Construction Accuracy, Proc. of ICOSSAR '89, San Francisco, U.S.A., Aug., 1989.