

Zeitschrift: IABSE reports = Rapports AIPC = IVBH Berichte
Band: 64 (1991)

Artikel: Combined frame-strut earthquake resistant bridge
Autor: Mitrofanov, Ju.M. / Popov, O.A.
DOI: <https://doi.org/10.5169/seals-49300>

Nutzungsbedingungen

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

Conditions d'utilisation

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

Terms of use

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

Download PDF: 08.03.2026

ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>



Combined Frame-Strut Earthquake Resistant Bridge

Pont mixte triangulé résistant aux séismes

Erdbebensichere Rahmen-Sprengwerk-Brücke

Ju. M. MITROFANOV

Professor
Moscow, USSR

O.A. POPOV

Civil Engineer
Giprotransmost
Moscow, USSR

I. INTRODUCTION

One of the most complicated problems of the transport construction is erection of viaducts across deep mountain canyons and workings. The considered design-technological solution under the conditions of hard accessibility regions was directed toward reduction of terms required for erection of the above transport structures, and ensures their high reliability in the course of operation.

The bridge superstructure features:

- a through system of cross-bar and bearing struts allowing passage of railway and motor transport at various levels, excluding in this case erection of high piers;
- engagement of the automatic passage orthotropic plate in a combined operation with elements of main girders;
- method of "downward" strut erection with closing the cross-bar in the middle of the central span.

2. BRIDGE ACROSS THE RAZDAN RIVER (ARMENIA)

Built in 1981, the bridge incorporates a frame-strut steel superstructure and reinforced concrete scaffold parts.

The crossed 250 m wide and 110 m deep canyon featuring steep vertical slopes. The area seismicity is of 9 number force.

The welded superstructure (Fig.1) uses high strength bolts for erection joints. The structure material - steels 10XCHD, 12 XTYAD of grade C-40, 15 XCHD (C-35), 16D (C-23). The total mass of metal is 3276 t.

The factory made metal structures were manufactured with the use of standard equipment and attachments for standard railway superstructures.

The developed erection method is universal for any climatic conditions.

The bridge rational parameters, the cross-bar strut lattice superstructure, application of plastic material, stability against brittle destruction, despite existing considerable overloads and oscillations made it possible to reliably ensure intactness and stability of the structure.

The design-technological solutions were applied in designing and erection of a number of objects in the USSR and abroad, on the combined bridge across the Red river in Hanoi (Vietnam).

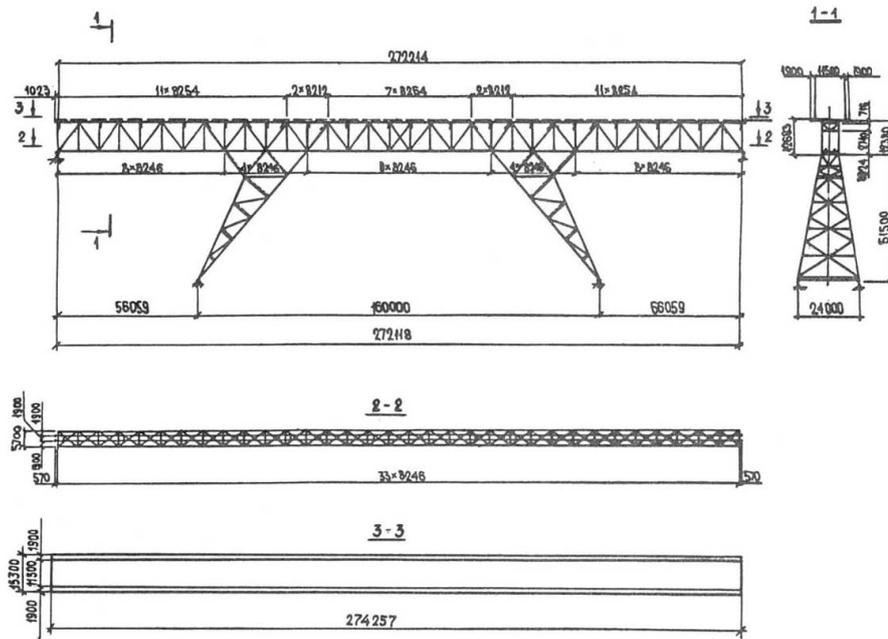


Fig. 1 Diagram of superstructure

The bends, measured in the course of tests, made 80% relative to the design ratings, and the axial stresses in the main girder elements - 70-85%. The bridge was normally operated within 10 years, and during the disastrous earthquake of 1988 the superstructure (Fig.2) suffered no damage.

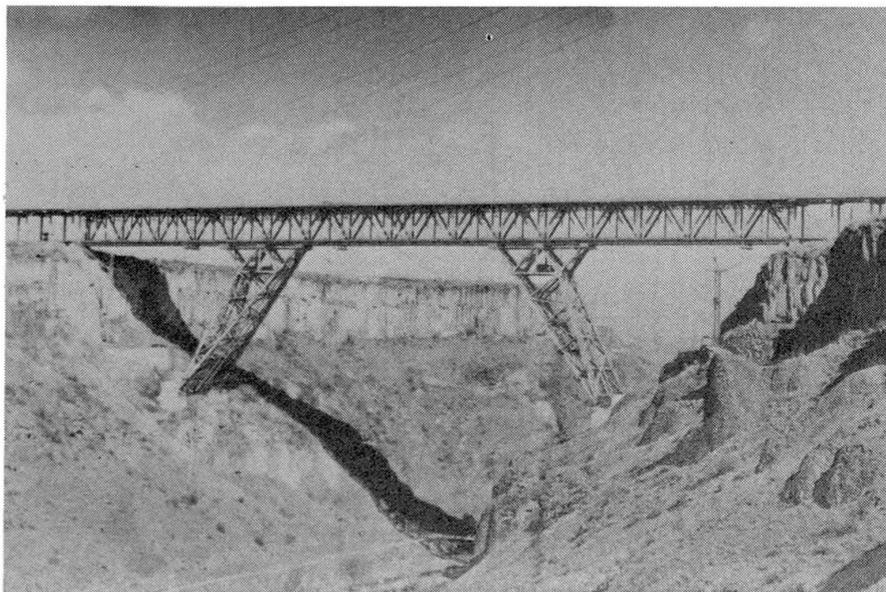


Fig. 2 General view of bridge