

Zeitschrift: IABSE reports = Rapports AIPC = IVBH Berichte
Band: 67 (1993)

Artikel: Retrieval of system properties of existing structures
Autor: Helou, Amin
DOI: <https://doi.org/10.5169/seals-51369>

Nutzungsbedingungen

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

Conditions d'utilisation

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

Terms of use

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

Download PDF: 23.01.2026

ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>

Retrieval of System Properties of Existing Structures

Détermination des caractéristiques de systèmes de structures existantes

Ermittlung der Systemeigenschaften bestehender Tragwerke

Amin HELOU
Prof. of Struct. Eng.
AN-Najah University
West Bank - via Israel



Amin Helou, born 1949, got his Civil Engineering degree from Roberts College, Turkey. He got his Ph.D. from North Carolina State University, Raleigh, NC, USA. Amin Helou has a long consulting experience in the United States and in the Middle East, and now is a Professor of Structural Engineering.

SUMMARY

Existing older structures are sometimes hard to evaluate, due to certain limitations in identifying their physical properties. It is shown, however, that the application of known forces at the nodes, together with the measurement of the associated displacements, leads to the retrieval of the physical characteristics of the structure, namely the stiffness matrix.

RÉSUMÉ

Il est parfois difficile d'évaluer les anciennes structures, en raison de certaines restrictions à identifier leurs caractéristiques physiques. Il apparaît toutefois que l'utilisation de forces connues aux noeuds, combinée à la mesure des déplacements correspondants, permet de déterminer les caractéristiques physiques de la structure, notamment la matrice de raidissement.

ZUSAMMENFASSUNG

Die Möglichkeiten zur Ermittlung der physikalischen Eigenschaften bestehender alter Tragwerke sind naturgemäß beschränkt. Wie jedoch gezeigt wird, kann aus der Applikation bekannter Kräfte an den Knoten und Messung der zugehörigen Verschiebungen die Steifigkeitsmatrix des Tragwerks gewonnen werden.



1. INTRODUCTION

Environmental attacks, corrosion and prolonged use of existing structures make their structural evaluation rather limited because their members' properties may not conform to the design values. Hence, classical methods of structural analysis become inadequate to tackle and overcome the difficulty involved. Therefore, it is both necessary and prudent to improve such methods. In this study, system identification techniques are introduced. In such techniques, the structural stiffness is recovered from known forces and known associated displacements. Once the stiffness matrix of a structure is determined, the internal design forces due to any loading condition can readily be obtained.

2. STATEMENT OF THE PROBLEM AND THE SOLUTION

Present methods of structural analysis are primarily based upon the stiffness methods of analysis in which the input is a family of stiffness coefficients presented in a matrix form and the loading conditions entered in a vector form. The unknowns are displacements and subsequently internal forces. The standard mathematical representation of these three variables is:

$$\{F\} = [K] \{x\} \quad (1)$$

in which

F is an $N \times 1$ loading vector

K is an $N \times N$ stiffness matrix

x is an $N \times 1$ system displacement vector

N is the number of degrees of freedom

In the traditional approach to structural analysis, $\{x\}$ is the unknown, whereas in this study the unknowns are the elements of K , which in some sense represent the characteristics of the structure. A process that has been developed for other engineering disciplines, but which is being introduced in structural engineering, is generically referred to as "System Identification". It is an attractive procedure to formulate and improve mathematical models.

To illustrate the derivation of the stiffness of the structure in terms of the applied force vector and the associated and measured displacements, the following situation is used:

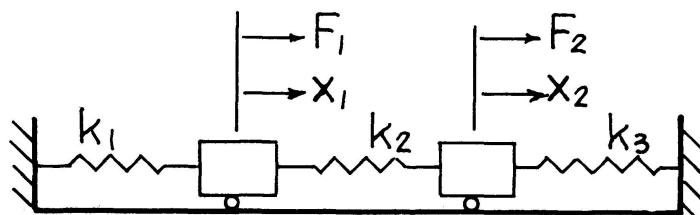


Figure 1

Figure 1 shows a two-degree of freedom system in which two lumped masses are attached to three linear springs with stiffnesses k_1, k_2, k_3 .

The force displacement relation for this situation is written in the following form:

$$\begin{Bmatrix} F_1 \\ F_2 \end{Bmatrix} - \begin{bmatrix} k_1 + k_2 & -k_2 \\ -k_2 & k_2 + k_3 \end{bmatrix} \begin{Bmatrix} x_1 \\ x_2 \end{Bmatrix} \quad (2)$$

For an exact solution, the following statement holds true, i.e.

$$\begin{Bmatrix} F_1 \\ F_2 \end{Bmatrix} - \begin{bmatrix} k_1 + k_2 & -k_2 \\ -k_2 & k_2 + k_3 \end{bmatrix} \begin{Bmatrix} x_1 \\ x_2 \end{Bmatrix} = \begin{Bmatrix} 0 \\ 0 \end{Bmatrix} \quad (3)$$

However, when this is not the case equation error vectors can be defined as:

$$\begin{Bmatrix} E_1 \\ E_2 \end{Bmatrix} = \begin{Bmatrix} F_1 \\ F_2 \end{Bmatrix} - \begin{bmatrix} k_1 + k_2 & -k_2 \\ -k_2 & k_2 + k_3 \end{bmatrix} \begin{Bmatrix} x_1 \\ x_2 \end{Bmatrix} \quad (4)$$

To obtain an error function the right hand side of equation (4) is squared and the result is then summed over the number of degrees of freedom. For the present case, the squared error function becomes

$$E^2 = E_1^2 + E_2^2 \quad (5)$$

The problem now is reduced to that of minimizing the error function with respect to the unknown stiffnesses. This is achieved by taking the derivative of E^2 with respect to each unknown element stiffness and setting it equal to zero. This leads to a set of linear equations equal in number to the number of elements.

Taking the first derivative of equation (5) with respect to k_1 , k_2 and k_3 yields the following set of equations written in matrix form

$$\begin{bmatrix} x_1 & 0 \\ x_1 - x_2 & -x_1 + x_2 \\ 0 & x_2 \end{bmatrix} \begin{Bmatrix} F_1 - (k_1 + k_2)x_1 + k_2 x_2 \\ F_2 + k_2 x_2 - (k_2 + k_3)x_2 \end{Bmatrix} - \begin{Bmatrix} 0 \\ 0 \end{Bmatrix} \quad (6)$$

which may be further reduced to

$$\begin{bmatrix} x_1 & 0 \\ x_1 - x_2 & -x_1 + x_2 \\ 0 & x_2 \end{bmatrix} \begin{bmatrix} x_1 & x_1 - x_2 & 0 \\ 0 & -x_1 + x_2 & x_2 \end{bmatrix} \begin{Bmatrix} k_1 \\ k_2 \\ k_3 \end{Bmatrix} - \begin{bmatrix} x_1 & 0 \\ x_1 - x_2 & -x_1 + x_2 \\ 0 & x_2 \end{bmatrix} \begin{Bmatrix} F_1 \\ F_2 \end{Bmatrix} \quad (7)$$



Defining a Jacobian matrix $[J]$ as follows

$$[J] = \begin{bmatrix} \frac{\partial E_1}{\partial k_1} & \frac{\partial E_1}{\partial k_2} & \frac{\partial E_1}{\partial k_3} \\ \frac{\partial E_2}{\partial k_1} & \frac{\partial E_2}{\partial k_2} & \frac{\partial E_2}{\partial k_3} \end{bmatrix} \quad (8)$$

It is readily noticed that equation (7) can be written in the following form

$$[J]^T [J] \{k\} = [J]^T \{F\} \quad (9)$$

From which $\{k\}$ can be solved for directly

$$\{k\} = [J]^T [J]^{-1} [J]^T \{F\} \quad (10)$$

The following example illustrates the solution. In this example a determinate truss configuration is chosen for simplicity in which displacements were actually computed using the standard Direct Stiffness Method. This is a numerical experiment meant to test the proposed method for the retrieval of the structure's unknown element stiffnesses. It must be mentioned, however, that for a determinate truss no such elaborate procedure is necessary because the problem in such a case is reduced to the solution of a system of linear equation.

For an indeterminate truss the inverse of $[J]^T [J]$ upon which the solution hinges is not guaranteed. To circumvent such a situation and to assure the existence of a solution two or more loading cases must be used and the squared error function given in equation (5) can be formally written as

$$E^2 = \sum_{n=1}^{NLC} \sum_{i=1}^N \left[F_i^n - \sum_{i=1}^N K_k \chi_k^n \right]^2 \quad (11)$$

in which N is the number of degrees of freedom and NLC is the number of loading conditions.

From which the solution for the element stiffness may be written as

$$\{k\} = \sum_{n=1}^{NLC} \left[[J]_n^T [J]_n \right]^{-1} \sum_{n=1}^{NLC} [J]_n^T \{F\}_n \quad (12)$$

3. EXAMPLE

The determinate truss shown in figure 2 is used to test the procedure. The truss is composed of 3 elements of cross sectional area equal to 25 cm^2 . The modulus of elasticity is $200 \times 10^8 \frac{\text{KN}}{\text{m}^2}$. The truss has 3 unrestrained degrees

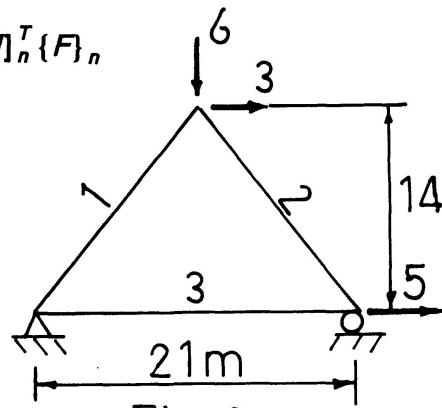


Fig 2

of freedom with the following reduced stiffness matrix derived with the standard Direct Stiffness Method for pin jointed trusses and written in terms of the unknown element stiffnesses.

$$[K] = \begin{bmatrix} 0.36k_1 + 0.36k_2 & 0.48k_1 - 0.48k_2 & -0.36k_1 \\ 0.48k_1 - 0.48k_2 & 0.64k_1 + 0.64k_2 & 0.48k_2 \\ -0.36k_2 & 0.48k_2 & k_3 + 0.36k_2 \end{bmatrix}$$

The applied loads are written in the following standard load vector

$$F = \begin{Bmatrix} 3 \\ -6 \\ 5 \end{Bmatrix} \text{ kN}$$

Therefore the error vector of equation can be written as

$$\begin{Bmatrix} E_1 \\ E_2 \\ E_3 \end{Bmatrix} = \begin{Bmatrix} F_1 \\ F_2 \\ F_3 \end{Bmatrix} - \begin{bmatrix} 0.36k_1 + 0.36k_2 & 0.48k_1 - 0.48k_2 & -0.36k_1 \\ 0.48k_1 - 0.48k_2 & 0.64k_1 + 0.64k_2 & 0.48k_2 \\ -0.36k_2 & 0.48k_2 & k_3 + 0.36k_2 \end{bmatrix} \begin{Bmatrix} x_1 \\ x_2 \\ x_3 \end{Bmatrix}$$

From which the following Jacobian matrix can readily be deduced

$$[J] = \begin{bmatrix} 0.36x_1 + 0.48x_2 & 0.36x_1 - 0.48x_2 - 0.36x_3 & 0 \\ 0.48x_1 + 0.64x_2 & -0.48x_1 + 0.64x_2 + 0.48x_3 & 0 \\ 0 & -0.36x_1 + 0.48x_2 + 0.36x_3 & x_3 \end{bmatrix}$$

Upon performing the operation as defined by the derived formula (10) the element stiffness are retrieved i.e. $k_1 = k_2 = 28571.4 \frac{\text{kN}}{\text{m}}$ and $k_3 = 23809.5 \frac{\text{kN}}{\text{m}}$ which are exactly the same as can be computed using EA/L . It must be reiterated that the displacements x_1, x_2 and x_3 supposed to measured, were in this numerical experiment computed using standard computer programs.



4. REFERENCES

Matzen, V.C. and McNiven, H.D., Investigation of the Inelastic Characteristics of the Single Story Steel Structure Using System Identification and Shaking Table Experiments, *Report No. EERC 76-20*, Earthquake Engineering Research Center, University of California, Berkeley, August 1974.

Shield, P.C., *Elementary Linear Algebra*, Worth Publishers Inc.

Touqan, A.R., *Najah 91, An Engineering Analysis Program for Framed Structures*, November 1990.

White, R.N., Gergely, P., Sexsmith, R.C., *Structural Engineering*, Combined Edition, John Wiley and Sons.