**Zeitschrift:** IABSE reports = Rapports AIPC = IVBH Berichte

**Band:** 68 (1993)

**Artikel:** Predicting debris distribution of collapsed buildings

**Autor:** Feng, Shiping / Guo, Hongxian / Shen, Jumin

**DOI:** https://doi.org/10.5169/seals-51861

### Nutzungsbedingungen

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. Mehr erfahren

#### **Conditions d'utilisation**

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. En savoir plus

#### Terms of use

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. Find out more

**Download PDF: 29.11.2025** 

ETH-Bibliothek Zürich, E-Periodica, https://www.e-periodica.ch



# **Predicting Debris Distribution of Collapsed Buildings**

Pronostics sur la répartition des décombres de constructions Vorhersage der Schuttverteilung einstürzender Bauten

### **Shiping FENG**

Assoc.Professor Tsinghua Univ. Beijing, China

Feng Shiping, born 1952, received his Eng. Doctor degree from Tsinghua Univ. China in 1986. In 1987, he was a post-doctoral researcher at the Univ. of Michigan, USA. He is an associate Prof. of Structural Eng.

### **Hongxian GUO**

Assist.Professor Tsinghua univ. Beijing, China

Guo Hongxian, born 1967, received her Eng. Master degree from Tsinghua Univ. China in 1993. She is an assistant Professor of Structural Eng.

### **Jumin SHEN**

Professor Tsinghua Univ. Beijing, China

Shen Jumin, born 1931, received his PhD. degree from Mocow Civil Eng. Inst. in 1961. He is a Professor of Struct. Eng. and a member of IABSE Working Commission 3 "Concrete Structures".

### **SUMMARY**

In order to predict the earthquake damage and the influence on road transportation of the debris of existing buildings in future earthquakes, the software system named "Prediction Earthquake Damage and Debris Distribution in a City" is developed. The functions of the system, the description of the data, the debris accumulation model of collapsed buildings and the reasoning procedure are explained in this paper.

# RÉSUMÉ

Cet article décrit un système de logiciels développé dans le but de prévoir la répartition des dommages dûs aux tremblements de terre futurs ainsi que l'influence des masses de décombres des immeubles écroulés sur les voies de circulation urbaine. Les auteurs exposent les différentes fonctions des logiciels, la description des données, le modèle d'accumulation des décombres des immeubles écroulés et le processus de raisonnement à suivre.

### **ZUSAMMENFASSUNG**

Es wurde ein Softwaresystem entwickelt, um die Verteilung von Erdbebenschäden und die Auswirkung der Trümmermassen auf die Befahrbarkeit städtischer Strassen für künftige Beben vorherzusagen. Der Beitrag behandelt die Datenbeschreibung, das Modell der Schuttanhäufung einstürzender Gebäude und die Vorgehensweise beim Schliessen.



### 1. INTRODUCTION TO THE SOFTWARE SYSTEM ---- PEDDD

In order to predict debris distribution of collapsed buildings during the earthquake, and to find out the influence of collapsed buildings both on road transportation and the rescue areas, the software PEDDD developed by Research Institute of Structural Engineering, Tsinghua University. Based upon it, Earthquake Resistant Office can organize a scientific aseismic and disaster relief plan and rescue scheme more effectively<sup>[1]</sup>. PEDDD can run on a micro-computer IBM PC / AT 286, 386 with graphics system or compatible. A digitizer and a plotter are needed. PEDDD consists of four functional modules as shown in Fig. 1.<sup>[2]</sup>

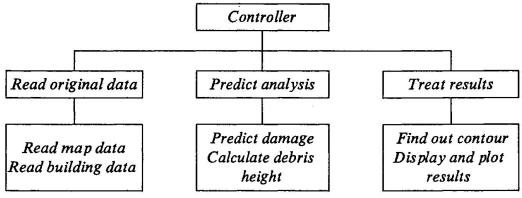


Fig.1 Functional modules diagram of PEDDD

PEDDD includes two characteristics: 1. In the earthquake damage, the accumulative effect of aftershock is considered, i.e. the effects of both the main shock and aftershock are all considered in PEDDD. 2. PEDDD has versatile graphics functions and make it easy to operate and to understand.

In order to realize the functions and characteristics of PEDDD, data and photographs from the surveys of post earthquake damage in many earthquakes in China and the ripe methods to predict earthquake damage in China are studied. These data, photographs and methods are turned into knowledge base described by computer. Finally, based on the earthquake damage prediction methods, the debris accumulation models and computer graphics technology, the objective of PEDDD is realized.

The approach of describing the building data and getting the debris accumulation type of a collapsed building will be explained in this paper.

# 2. REQUIRED PARAMETERS AND THEIR REPRESENTATION IN PEDDD

In the current version of PEDDD, two kinds of building i.e. multi-story masonry buildings and old brick timber buildings are considered. The selection and description of the parameters of a building are the keypoints during the process of prediction by computer.

Which parameters are required in PEDDD is determined by the applied methods which are come from the study of the surveys of the post earthquake damage in many earthquakes. The approach of getting the data of predicted buildings of PEDDD is to carry out the investigation of the existing buildings. Since the buildings are various and were built in different years, the data from the user may not contain all of them, i.e. it is impossible to get the accuracy initial parameters to predict.



In order to solve the above problem, the design maps of more than ten typical buildings are chosen to analyze and calculate. The basic data such as the weight per area and the wall percentage per area are obtained by statistics. It makes the work of getting initial data more rationally and rapidly. During the work of determining the parameters used in PEDDD, another contribution is to solve the determination of the existing station coefficient ( the service condition coefficient ) of the buildings. Because the coefficient of the situation of existing station of the building is a experience value evaluated by the experts, the method to get the coefficient in PEDDD is to consider the structural conditions of the building in different weight and to choose 12 factors to sum up in their weight. The coefficient is determined by using the sum to compare to the standard value.

After determining the required parameters of the building, the next problem is how to describe them in computer language. Based on the programming language Quick BASIC 4.5 used in PEDDD, the TYPE statement is used to solve it. There is a example to show how to describe the parameters in masonry buildings. The initial required parameters in predicting a masonry building which don't include the story information are 26. They are described as 'TYPE bricktype' in PEDDD. In the list of the explaining, 'non' means the parameter is not a required initial one, it is needed in linking another information of the buildings.

<b>TYPE</b>	bricktype			
ibs	AS		' the pointer looking for the building number	
itype	e AS	<b>INTEGER</b>	' the type of the building	
istor	yl AS	<b>INTEGER</b>	' non, link to the story information	
istor	y2 AS	<b>INTEGER</b>	' non, link to the story information	
score	e AS	SINGLE	' the coefficient of the existing station of the building	
shap	e AS	<b>INTEGER</b>	' the shape of the building	
supp	ort AS	<b>INTEGER</b>	' the load-bearing system of the building	
time	AS	INTEGER	' the time build the building	
slab	AS	INTEGER	' the panel system	
roof	AS	INTEGER	' the roof system	
max	1 AS	SINGLE	' the maximum distance between the adjacent transverse	
max	2 AS	SINGLE	'wall in the top (max1) and bottom story (max2)	
1	AS	SINGLE	the length of the building	
w	AS	SINGLE	' the width of the building	
colu	mn AS	<b>INTEGER</b>	' the situation of the constructed column	
bean	n AS	INTEGER	' the situation of the circle beam	
conn	ect AS	INTEGER	' the situation of the connection between the	
			' longitudinal wall and the transverse wall	
brick	c AS	INTEGER	' the type of masonry block	
place	e AS	<b>INTEGER</b>	' the ground condition	
hp	AS	SINGLE	' the height of the parapets	
area	AS	SINGLE	' the area of the building	
sb	AS		' there is a little house on the top or not	
ns	AS	INTEGER	' the number of the story of the little house	
floor	: AS	INTEGER	' there is a shop in the bottom or not	
brick	c1 AS	INTEGER	the type of masonry block of the little house	
h	AS	SINGLE	' the total height of the building	
g	AS	SINGLE	' non, the total weight of the building from calculating	
owe	AS		' non, the product of the l and w	
tw	AS	SINGLE	the thickness of the non load bearing wall	
END TYPE				

# 3. MODELS FOR DEBRIS ACCUMULATION OF COLLAPSED BUILDINGS


Based on the surveys of post earthquake damage of many earthquakes, especially on the pho-



tographs of TangShan earthquake<sup>[3]</sup>, 1976, China and other eight strong earthquakes in China, the authors analyzed and summarized these photographs and data, then proposed three debris accumulation models to describe the shape and the distribution of the debris of the collapsed buildings. So far, only masonry buildings and old brick timber buildings are considered.

# 3.1 Accumulation model of partial collapsed buildings

In this case, the external longitudinal walls and gable walls are collapsed, but the transverse walls and internal longitudinal walls still exist. Sometimes, the falling of the external walls maybe cause the falling of the adjacent internal walls or the corner of the house partly collapse. Therefore, partial collapsed model mainly describes the characteristics of the collapsed external wall. The debris distribution sketch is shown in Fig.2. The shape of the collapsed building is described in the following Eq.(1).

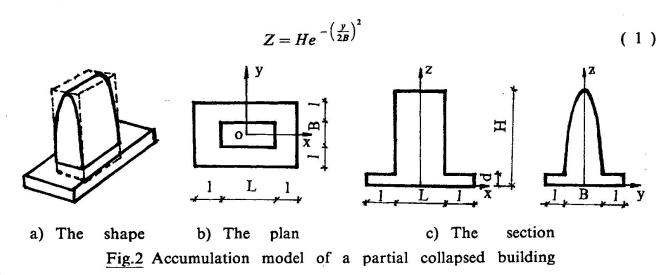

To describe the debris that come from the collapsed wall, the average thickness d in the involved range l is used. Assume that the wall are broken one story by one story, distance l to the horizontal position of the debris of the top story can be determined by Eq.(2).

$$l = \sum_{i=1}^{n} h_i Sin(\frac{i\pi}{2n})$$
 (2)

where n — the total number of stories;  $h_i$ — the height of the i—th story; If  $1 > l_c$  then the final value is  $l_c$ ,  $l_c$  is the nearest distance from the other adjacent buildings.

$$d = \frac{HW_d}{I} K_{\nu} \tag{3}$$

where W<sub>d</sub>---- the thickness of the external wall;

H ---- the total height of the building;

 $K_v$ —— the numerical coefficient with consideration of non-dense debris accumulation, for brick masonry buildings  $K_v = 1.5$ ; for old brick timber buildings  $K_v = 2.0$ .

# 3.2 Accumulation model of overall collapsed buildings

Overall collapse means that a building is totally collapsed, or the falling of the bottom story



lead to the building all collapsed. The debris graph is shown in Fig.3.

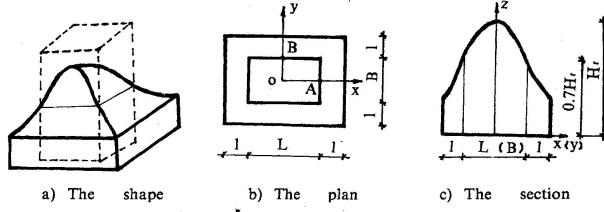


Fig.3 Accumulation model of a overall collapsed building

The formula to calculate the height Z of the debris accumulation is described as Eq.4.

$$Z = H_f e^{-\left(\frac{x}{\alpha}\right)^2} e^{-\left(\frac{y}{\beta}\right)^2} \tag{4}$$

where  $\alpha$ ,  $\beta$ —— are the falling gradient along the x,y axis respectively. Assume that at the point A and B in Fig.3, the height of the debris accumulation height is equal, and  $Z = 0.7H_f$  then  $\alpha = 0.837L$ ,  $\beta = 0.837B$ .

$$H_{f} = \frac{GK_{v}}{\gamma_{eq} \int_{\frac{1}{2}-l}^{\frac{1}{2}+l} \int_{\frac{1}{2}-l}^{\frac{1}{2}+l} e^{-\left(\frac{x}{\alpha}\right)^{2}} e^{-\left(\frac{y}{\beta}\right)^{2}} dx dy}$$
 (5)

where G ——— the total dead load of the building;

 $\gamma_{eq}$ —— the equivalent material volume weight; 1—— minimum of 0.5 H and  $l_c$ ;

 $K_{\nu}$ , H ——— the same meaning as Eq.(3)

# 3.3 Accumulation model of top collapsed buildings

In this case, several stories of a building are collapsed. Nevertheless, other lower stories of this building still exist. The debris accumulation graph is shown in Fig.4. The height of debris accumulation can be expressed as Eq.(6). The thinckness of debris accumulation in the involved range d is determined by Eq.(7).

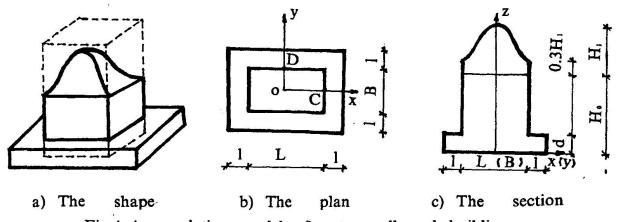


Fig.4 Accumulation model of a top collapsed building



$$Z = \begin{cases} H_0 + H_1 e^{-\left(\frac{x}{a}\right)^2} e^{-\left(\frac{y}{\beta}\right)^2} & (|x| \le 0.5L, |y| \le 0.5B) \\ d & (|x| > 0.5L, |y| > 0.5B) \end{cases}$$
 (6)

$$d = \frac{\frac{G'}{\gamma_{eq}} K_{V}^{-4} \int_{0}^{\frac{L}{2}} \int_{0}^{\frac{B}{2}} e^{-\left(\frac{x}{\alpha}\right)^{2}} e^{-\left(\frac{y}{\beta}\right)^{2}} dx dy}{(L+2l)(B+2l)}$$
(7)

where  $H_0$ —— the height of the part building non-collapse;  $H_1$ —— the maximum collapsed height;

$$H_{1} = \frac{G'K_{V}}{\gamma_{AB}BL} \tag{8}$$

and G'--- the weight of the part collapsed building;

 $\alpha,\beta$ —— the same meaning as the Eq.4. Assume that at the point C and D in Fig.4, the height is equal and  $Z = H_0 + 0.3H$ , then in Eq.(6)  $\alpha = 0.456$  L,  $\beta = 0.456$  B.

### 4. REASONING PROCEDURE OF THE DEBRIS ACCUMULATION MODEL

# 4.1 The method to predict earthquake damage level

The kind of the debris accumulation of a collapsed building is deduced by the damage level. The debris accumulation model of partially collapsed building is gained from the partial collapsed building. Whether the accumulation models is the top one or the overall one is determined by the different collapsed degree of the overall building. Here two methods to predict earthquake damage level are introduced in brief.

# 4.1.1 Mutil-story masonry buildings

Refer to the reference [4], the ripe method to predict earthquake damage for multi-story masonry structure in China is applied in PEDDD. The suitable amendments are purposed when aftershock is considered. The keypoints of this method is to check the shear strength of the wall. The kernel thought is in the following:

The damage level of the buildings can be divided into six class: Basic no-damage, Slightly damaged, Moderately damaged, Seriously damaged, Partially collapsed and Overall collapsed. The classification is determined by the aseismic capability of the building. The main formula to represent the aseismic capability is Eq.(9).

$$K = K_{\mathsf{T}} \quad K_{\mathsf{T}} \tag{9}$$

where K ——— the aseismic capability index, represents the earthquake resistance capability of the masonry building in the given earthquake intensity.

K<sub>1</sub>—— the aseismic strength coefficient of masonry building, obtained by calculating and comparing with the shear force of the building under the earthquake action.

K<sub>II</sub>— the secondly criterion coefficient. It is a revised coefficient considered other influenced factors on earthquake damage such as the connection, the existing station, the measure to strengthen the aseismic capability and the ground condition of the building.

Based on the above method and initial data of the masonry buildings, the aseismic capacity index of the each story of the building can be obtained. Using the following criterion in



DAMAGE LEVEL	THE CRITERION	NOTES
Basic No-Damage	K <sub>0</sub> >1.0	$K_0 = Min\{K_{Ii}K_{II}\}$
Slightly Damaged	$0.9 \le K_0 < 1.0$	
Moderately Damaged	$0.6 < K_0 < 0.9$	
Seriously Damaged	$\frac{1}{3} \le K_0 < \begin{cases} 0.6 & (N_0 > 1) \\ 0.7 & (N_0 > n/2) \\ 0.8 & (N_0 > 2n/3) \\ 0.9 & (N_0 > 3n/2) \end{cases}$	n — the total stories of the building; $N_0$ — the story number of unsatisfied aseismic capacity, if all are not satisfied then $N_0 = 2n$ .
Partially Collapsed	$K_0 < 1/3$ and $K_{Ii} \geqslant 1/3$	
Overall Collapsed	$K_0 < 1/3$ and $K_{Ii} < 1/3$	6

Table.1, the earthquake damage level can be determined.

The Criterion to predict earthquake damage level Table.1

## 4.1.2 Old brick timber buildings

There is a little different in damage level classification between the old brick timber buildings and masonry buildings. There is no partial collapse damage level in old brick timber building. If the building collapsed then it should be overall collapsed.

The method used to predict old brick timber buildings is very different from the method in masonry buildings. According to the features of the earthquake damage in data, refer to the reference [5], probability theory and fuzzy mathematics technique are combined to predict earthquake damage for old brick timber structure. In this method, take the length, the existing station and the number of the stories of the building as the fuzzy number and build up fuzzy subset A. At the same time, from the extensive survey of the post earthquake damage form the fuzzy subset of earthquake damage index R. Therefore, according to the fuzzy relation B = A R, the value B which express the damage level will be obtained.

### 4.2 Reasoning procedure of debris accumulation model

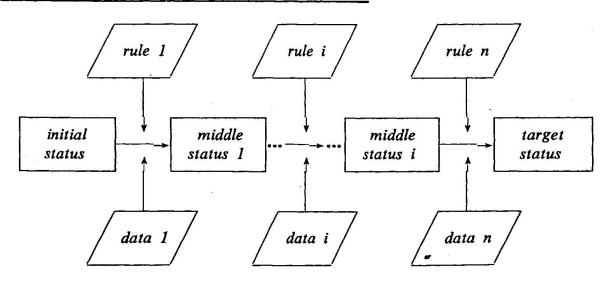


Fig.5 The reasoning procedure in PEDDD

In PEDDD, the following reasoning procedure is used. A reasoning path is formed by the driving status, the deductive method and the IF-THEN rule chains. Generally speaking, dif-



ferent initial data make the system use a suitable rule to obtain a approciate conclusion and to make the system be in different status. The current status will drive the system to choose another rule, be in another status, ..., and go on, until the earthquake damage level or the debris accumulation model is determined. The path can be shown in Fig.5.

#### 5. APPLICATION AND CONCLUSION

In order to verify the reliability and practicability of PEDDD, the earthquake damage of the buildings which introduced in the collected data about TangShan Earthquake damage, is analyzed and 'predicted'. The results obtained are coincide with the true situation. Because the interface of PEDDD is friendly, operation is convenient, promptness and help are enough and error processing and maintenance are strong, user can use it very well. The application of PEDDD in two small streets of Yangpu District, Shanghai City where there are 1100 masonry or old brick timber buildings show the good reliability and practicability. It is quite promising to apply PEDDD in the seismic zone in China where multi—story masonry buildings and old brick timber buildings are crowded.

### 6. ACKNOWLEDGEMENTS

We acknowledge the contribution and assistance of the teachers and students of Research Institute of Structural Engineering, Tsinghua University. Especially Prof. Wang Jizhi, Prof. Qiu Zonglian, Mr. Fu Pinjun and students Ma Donghui, Sun Jiehua and Zhao WenDong. Also we are thankful for the support and cooperation of Mr. Xie Weizhou and others of the Earthquake Resistant Office for Disaster Relief Work of Yangpu District of Shanghai City of China.

#### REFERENCES

- 1. FENG SHIPING, MA DONGHUI, Research on Earthquake Damage and Debris Distribution of Earthquake Collapsed Buildings with Brick Masonry Structure and Old Brick Timber Structure, Research report of RISE, Tsinghua University, Dec. 1991
- 2. WANG JiZHI, GUO HONGXIAN, SUN JIEHUA, Research Report on the Programming of PEDDD, Research report of RISE, Tsinghua University, Dec. 1991
- 3. YANG YUCHENG et al, The Method to Predict Earthquake Damage for Existing mutil-Masonry Building and its Reliability, EARTHQUAKE ENGINEERING AND ENGINEERING VIBRATION, P75-85, Sept. 1982
- 4. JIN GUOLIANG et al, The Method to Predict Earthquake Damage on Old Brick Timber Structure, ENGINEERING EARTHQUAKE RESISTANCE, P17-21, Jun. 1985
- 5. EARTHQUAKE DAMAGE ON TANGSHAN EARTHQUAKE, Seismic Press, May 1986