

Zeitschrift: IABSE reports = Rapports AIPC = IVBH Berichte
Band: 69 (1993)

Artikel: Probabilistic criteria for serviceability limit of wind response
Autor: Kanda, Jun / Tamura, Yukio / Nakamura, Osamu
DOI: <https://doi.org/10.5169/seals-52546>

Nutzungsbedingungen

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

Conditions d'utilisation

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

Terms of use

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

Download PDF: 16.03.2026

ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>



Probabilistic Criteria for Serviceability Limit of Wind Response

Critères probabilistes pour l'aptitude au service relative au vent

Probabilistische Gebrauchstauglichkeitskriterien für Windschwingungen

Jun KANDA

Assoc. Professor
University of Tokyo
Tokyo, Japan

Yukio TAMURA

Prof. Dr.
Tokyo Institute of Polytechnics
Atsugi, Japan

Osamu NAKAMURA

Engineering Consultant
Wind Engineering Institute
Tokyo, Japan

Kiyoshi UESU

Senior Res. Eng.
Housing and Urban Dev. Corp.
Tokyo, Japan

SUMMARY

Probabilistic criteria are proposed for serviceability limit state design for annual maximum wind speed. The variability of human perception limit based on simulated experiments is taken into account. Numerical examples for number of days per year of perception of motions are shown by utilizing wind speed data in Tokyo. Comparisons with an existing guideline in Japan are also made.

RESUME

Des critères probabilistes sont proposés pour l'état limite de l'aptitude au service pour la vitesse maximale, annuelle, du vent. La limite de perception humaine basée sur les expériences simulées est prise en considération. Des exemples numériques pour le nombre de jours par an pour la perception des mouvements sont indiqués en utilisant les données de la vitesse du vent à Tokyo. Des comparaisons avec une directive japonaise sont également effectuées.

ZUSAMMENFASSUNG

Es werden Wahrscheinlichkeitskriterien zur Bemessung auf Gebrauchstauglichkeit für jährliche maximale Windgeschwindigkeiten vorgeschlagen. Dabei werden die Unterschiede der menschlichen Wahrnehmungsgrenzen in simulierten Experimenten berücksichtigt. Numerische Beispiele bezüglich der Anzahl der Tage pro Jahr für die Wahrnehmung von Bewegungen werden unter Verwendung der Windgeschwindigkeitsdaten von Tokio gezeigt. Weiterhin werden Vergleiche zu bestehenden Richtlinien in Japan vorgestellt.



1. INTRODUCTION

Until recently design loads for most of tall buildings in Japan were dominated by the earthquake load rather than by wind load. Although the design criteria for the wind and the earthquake have to be carefully discussed on their relevance and consistency, wind responses of some flexible and/or light tall buildings, now, tend to be predicted in the range of deflection criteria. In such cases human perception of the wind response in fairly frequent storms can easily be anticipated.

Some vibration control devices have been installed in these buildings in order to suppress the wind response. However the serviceability criteria for wind responses are not well established. Several guidelines are available to describe the performance of the wind response, but they have not taken into account the variability of neither individual perception limits nor wind response magnitudes. And it is difficult for engineers to judge what is the appropriate level for the wind response.

Probabilistic criteria for the serviceability limit of wind responses are proposed based on some statistical information for the human perception of horizontal vibration. The meaning of the criteria is examined in various manners including comparisons with conventional criteria given to return period winds. Effects of the variability of wind response on the perception probability are also discussed.

2. SERVICEABILITY LIMIT STATE DESIGN

The magnitude of wind response is a function of the wind speed, which is a random variable. The perceptible level of motion varies considerably from a person to a person. Then a probability-based limit state design becomes necessary to take those variabilities into account. Since the perception of motion is a clear definition in comparison with the discomfort or the annoyance, it can be regarded as a representative serviceability limit for the wind response. Then a typical schematic flow of serviceability limit state design for wind-induced vibration is shown in Fig. 1.¹⁾

Once a construction site is given, the probability distribution of annual maximum wind speed is estimated from statistical meteorological data. The magnitude of wind response can be calculated in several ways for buildings with known dynamic characteristics. For human perception problems the acrosswind response has to be estimated as its peak acceleration usually dominates that of the alongwind response. The estimation is made either by empirical formulae or by wind tunnel experiments.

The perception limit for horizontal sinusoidal motions, P , may be modeled by a log-normal distribution with the mean μ_p and the coefficient of variation (c.o.v.) which is assumed as 0.4 based on simulation experiments²⁾, where μ_p in terms of the acceleration amplitude (m/s^2) is approximately expressed as follows,

$$\mu_p = 0.0148 f_0^{-0.6} \quad (1)$$

where f_0 is the frequency (Hz) of motion. Eq.(1) was obtained in a frequency range between 0.3 Hz and 2Hz.

Then the probability of perception of motion, P_p , can be estimated. When the target reliability index β_T is given, the design format becomes,

$$P_p = \text{Prob} [A > P] \leq \Phi(-\beta_T) \tag{2}$$

where A is the annual maximum response predicted in terms of the acceleration, and $\Phi(\cdot)$ is the standard normal cumulative distribution. Since the wind response is a random vibration, A must be a value equivalent to the amplitude of sinusoidal motion to be compared with a random variable P based on experiments. Tentatively $A=2\sigma_a$ is proposed¹⁾, where σ_a is the standard deviation of random acceleration response.

When the probability distribution of A is also modeled by the log-normal, the reliability index β for non-perception, i.e., $A < P$, is obtained by a simple formula as,

$$\beta = \frac{\lambda_p - \lambda_A}{\sqrt{\zeta_p^2 + \zeta_A^2}} \tag{3}$$

where $\lambda = \ln \mu - 1/2 \zeta^2$ (mean of logarithm)

$$\zeta^2 = \ln \{ 1 + (\sigma/\mu)^2 \} \quad (\text{variance of logarithm}).$$

According to eq.(2) for design formula, β of eq.(3) is compared with β_T as shown in Fig.1, and $\beta \geq \beta_T$ concludes the procedure, while $\beta < \beta_T$ requires some changes in design parameters as indicated in the flow.

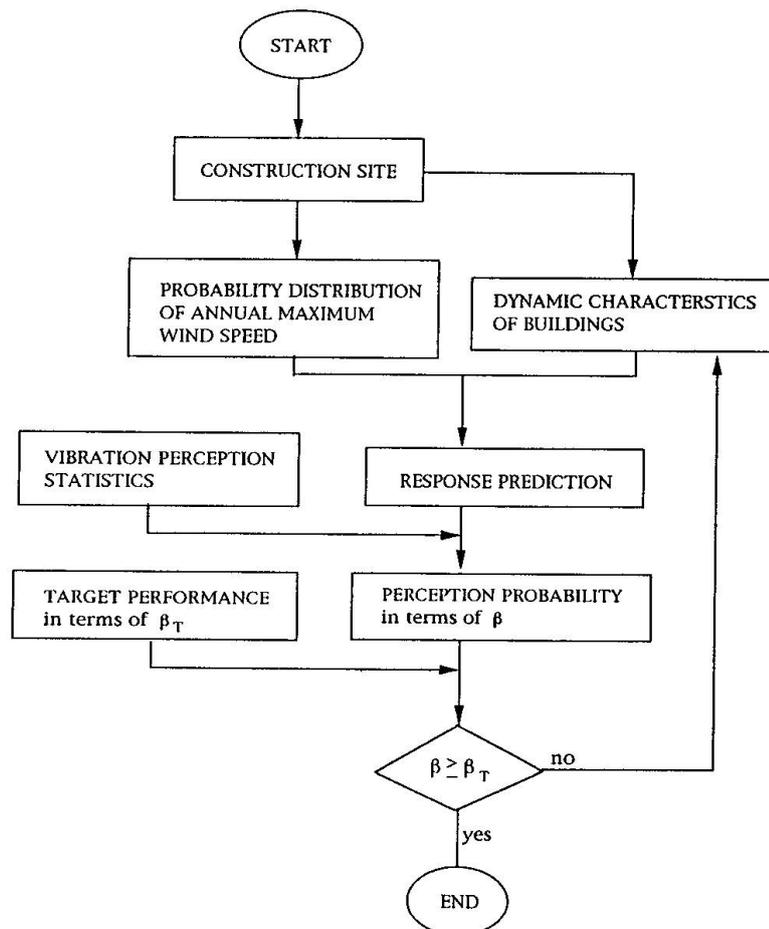


Fig.1. Schematic flow of serviceability limit state design for wind response



3. PROBABILISTIC CRITERIA FOR WIND RESPONSE

It is not so simple to judge which β is the most appropriate. Generally people do not expect that buildings vibrate in strong winds but they may accept if the perception of motion is not very frequent. Social and economical view points also have to be considered. Possible human reactions for β values may be described in Table 1.

Descriptions of human reactions are still only relative measures of performance. Nevertheless the β value provides objective wind response performance reflecting human perceptibility of motion. In order to discuss the appropriateness of β level, we need social experiments to examine feed-back opinions from occupants who are given information of design β . The annual probability of perception of motions is somehow general but rather abstract concept and can be explained more specifically in terms of number of days for perception of motions. Numerical examples are demonstrated for buildings in Tokyo area with different β values.

Wind data obtained at the Tokyo meteorological station during 10 years between 1979 and 1988 are utilized. The wind response in terms of equivalent acceleration amplitude, A , is assumed to be expressed as a function of U as,

$$A = \gamma U^{3.3} \quad (4)$$

When β is specified, γ is obtained for a frequency, f_0 , in eq.(1) according to the serviceability limit state design described in the previous section with the coefficient of variation for both A and P as 0.4. According to the probability distribution model of P , wind response level A , at which 10%, 30% and 50% of occupants perceive the motions of frequency f_0 , is calculated. From this A value for f_0 , the corresponding wind speed U can be obtained by eq.(4) with γ representing β levels. Then the number of days when 10%, 30% and 50% of occupants perceive the motion can be counted for each year. This number is obtained as constant with the frequency f_0 . Results are shown in Fig.2 for $\beta = -1.0, 0.0$ and 1.0.

Relatively frequent vibration perceptions are observed before 1982 in the figure. In 1984, vibration causing the perception to 30% occupants or more almost did not occur even for buildings designed with $\beta = -1.0$.

The average tendency is shown in Fig.3, where the average number of days of perception for 10 years are shown with β as the abscissa. In this example, the variability of the response calculation is neglected. In buildings with $\beta = -0.5$, 30% occupants or more perceive wind responses in 4 days per year and in buildings with $\beta = 0.5$, they perceive

Table 1. β categories for wind response

β value	human reactions
less than 0	complaints will occur
0 - 1	complaints may occur
1 - 2	perceptible but no complaints
greater than 2	not perceptible in majority

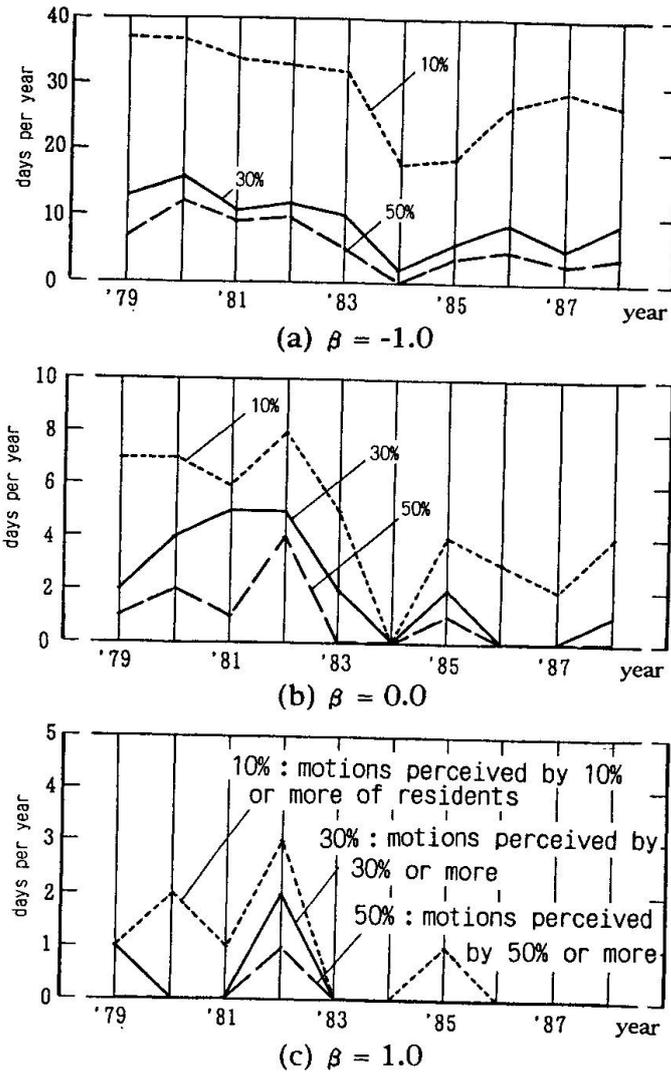


Fig.2. Annual change of number of days when occupants perceive motions due to wind

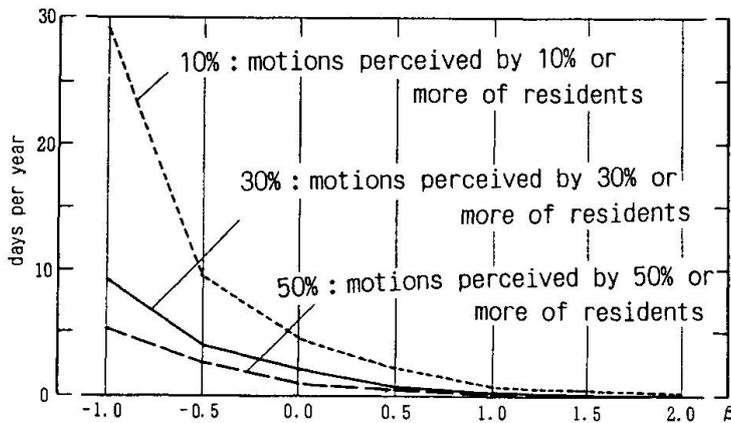


Fig.3. Average number of days for perception of motions due to wind with β

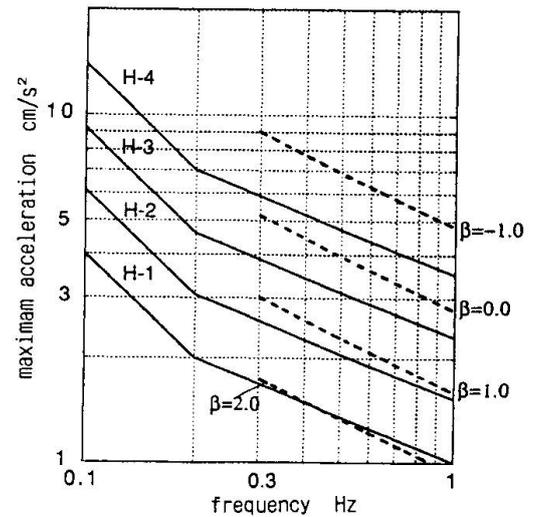


Fig.4. Comparison of perception criteria for wind response



motions in only one day per year as an average. Such numerical studies have to be followed in actual situations in order to reach a consensus on the target β_T among engineers, architects and occupants.

4. COMPARISONS WITH EXISTING GUIDELINE

Most existing guidelines for the serviceability criteria of wind responses are deterministically specified to a wind speed corresponding to a return period.^{3),4)} One of recent guidelines is shown in Fig. 4, when a design wind speed of one year return period obtained from daily maximum wind speed data is recommended to be used. The lowest level, i.e., H-1, is approximately consistent to ISO minimum perception limit.⁵⁾

For those criteria, the design format may be written as,

$$\hat{P} \geq \hat{A}_R \quad (5)$$

where \hat{P} is the perception limit and \hat{A}_R is the wind response amplitude due to the wind speed of R-year return period. When statistical data for the human perception of motion is utilized, \hat{P} can be specified in a probabilistic manner. For example, when P is modeled by the log-normal distribution with the mean of eq.(1) and the c.o.v. of 40%,

$$\hat{P} = \mu_p e^{-2 \zeta_p} = 0.685 f_o^{-0.6} \quad (6)$$

also gives a limit close to H-1 in Fig.4.

Probabilistic serviceability limit state design format can be rewritten, based on the log-normal distribution model, from eq.(3) as ,

$$\mu_p \geq e^{\beta} \sqrt{\sigma_p^2 + \sigma_A^2} \mu_A \quad (7)$$

In order to examine the relationship between probabilistic criteria in terms of β in eq.(7) and the deterministic criteria due to eq.(5), a parametric study was conducted. The c.o.v. of annual maximum wind speed, V_{va} , the uncertainty in the response prediction in terms of c.o.v., V_G , the c.o.v. of individual perception limits, V_p , and the return period R are chosen as variables. When the variability of the annual maximum wind speed and the uncertainty of the wind response prediction are given, Prob[$A > P$] can be calculated for the deterministic criteria with the design wind speed of return period R.

The c.o.v. of annual maximum wind load is assumed to be approximated by $2 V_{va}$. Then the wind load for R-year return period, W_R , is obtained based on the Gumbel distribution for the annual maximum wind load as,

$$\hat{W}_R = \left[1 + \left\{ -0.78 \cdot 2V_{va} \ln \left(-\ln \left(1 - \frac{1}{R} \right) \right) - 0.9 \right\} V_{va} \right] \mu_{wa} \quad (8)$$

where μ_{wa} is the mean of annual maximum wind load.

The peak acceleration response for R-year return period, \hat{A}_R , may be obtained by multiplying a coefficient C as,

$$\hat{A}_R = C \hat{W}_R \quad (9)$$

Although C may not be a constant in a wide range of wind load, a linear relationship between \hat{A}_R and \hat{W}_R is assumed for the simplification. Eq.(6) is also assumed, i.e., the

deterministic perception criteria is given as the probability point which is specified as (the mean) -two times (standard deviation) for the log-normal distribution, namely,

$$\lambda_p - 2 \zeta_p = \ln(\hat{A}R) \tag{10}$$

When the c.o.v. is on the order between 0.2 and 0.5, the Gumbel distribution can be approximated by a log-normal distribution. In particular when coefficient C is a random variable, the product of C and W_a can be well represented by a log-normal distribution.⁶⁾

Then the perception probability is obtained by eq.(3) with $V_A^2 = (2V_{va})^2 + V_G^2$, $\mu_A = C \mu_{wa}$. The annual perception probability $\Phi(-\beta)$ is calculated and listed for $V_{va}=0.1, 0.2$ and 0.3 ; $V_p=0.3, 0.4$ and 0.5 ; $V_G=0.0, 0.2$ and 0.4 in Table 2 (a) for $R=2$ (years) and (b) for $R=5$ (years).

For a typical case of $V_{va}=0.20, V_p=0.40$ and $V_G=0.20$, the perception probability, P_p , values for $R=2$ (years) and $R=5$ (years) are 9% and 3% respectively. P_p for $R=5$ is not sensitive to the change of V_{va}, V_p and V_G in comparison with that for $R=2$. By utilizing the wind data in Tokyo, proposed criteria with various β which are shown by dotted lines, are compared with A.I.J. criteria introduced in Fig. 4. The peak factor commonly used in the

Table 2. Perception probability for the criteria specified for a return period wind¹⁾

(a) 2-year return period wind				(b) 5-year return period wind			
(i) $V_{va} = 0.10$				(i) $V_{va} = 0.10$			
V_p	V_G			V_p	V_G		
	0.0	0.20	0.40		0.0	0.20	0.40
0.3	0.053	0.072	0.108	0.3	0.018	0.030	0.059
0.4	0.040	0.052	0.076	0.4	0.016	0.024	0.043
0.5	0.034	0.042	0.059	0.5	0.016	0.021	0.034
(ii) $V_{va} = 0.20$				(ii) $V_{va} = 0.20$			
V_p	V_G			V_p	V_G		
	0.0	0.20	0.40		0.0	0.20	0.40
0.3	0.110	0.132	0.140	0.3	0.029	0.037	0.055
0.4	0.077	0.085	0.101	0.4	0.022	0.027	0.040
0.5	0.059	0.065	0.078	0.5	0.019	0.022	0.031
(iii) $V_{va} = 0.30$				(iii) $V_{va} = 0.30$			
V_p	V_G			V_p	V_G		
	0.0	0.20	0.40		0.0	0.20	0.40
0.3	0.157	0.159	0.167	0.3	0.040	0.044	0.055
0.4	0.112	0.117	0.155	0.4	0.029	0.032	0.040
0.5	0.086	0.090	0.098	0.5	0.023	0.025	0.032



random vibration theory, which is 3.74 for $f_0=1$, is used to calculate the maximum amplitude in A.I.J. criteria, while 2 is tentatively used in the proposed one as mentioned previously. $\beta=2.0$ corresponds to the H-1 level and $\beta=0.0$ corresponds to a level between H-3 and H-4. Since V_{va} and V_G vary depending on site and design situation, perception probability consistent criteria seem to be preferable to a conventional criteria with a specified return period wind speed. The flexibility in the specification of building performance is described by the second moment reliability index β . A more consistent β value should be achieved through many opportunities of use of the serviceability limit state design with proposed probabilistic criteria, although it may take time to make such an index as a common measure for wind response performance in the society.

5. CONCLUSION

Probabilistic design criteria with the second moment reliability index are proposed based on experimental data on the human perception limits to low-frequency horizontal motions. A comparison with one of recent guidelines with conventional criteria was made by demonstrating numerical examples. The flexibility in the specification and the rationality for allowing the variability of both wind loads and individual perceptions are stressed.

ACKNOWLEDGEMENT

This study is a part of the research conducted in the committee on "Habitability performance of highrise residential buildings in strong winds" supported by Housing and Urban Development Corporation and Technology Research Center for National Land Development.

REFERENCES

1. KANDA, J., TAMURA, Y. and FUJII, K., Relationship between Probabilistic Criteria and Deterministic Criteria for Human Perception to Wind Induced Motions, Proc. Serviceability of Steel and Composite Structures, Pardubice, 1990, pp.61-66.
2. KANDA, J., TAMURA, Y. and FUJII, K., Probabilistic Perception Limits of Low-Frequency Horizontal Motions, Proc. Serviceability of Steel and Composite Structures, Pardubice, 1990, pp.67-72.
3. Korten. H. van., The Comparison of Measured and Calculated Amplitudes of Some Buildings and Determination of the Damping Effects of the Buildings, Proc. Wind Intern. Conf. Wind Effects Build. Stru., Tokyo, 1971, pp.825-839.
4. Architectural Institute of Japan, Guidelines for the Evaluation of Habitability of Building Vibration, April 1991.(in Japanese)
5. I.S.O., Guideline for the Evaluation of the Response of Occupants of Fixed Structures, Especially Buildings and Off-Shore Structures to Low Frequency Horizontal Motion (0.063 to 1 Hz), ISO 6897, 1st ed., 1984.
6. SUNOHARA, H. and KANDA, J., Probability Distribution of Yearly Maximum Wind Load, Rep. Ann. Meeting of Archit. Inst. Japan. Str. I., Oct. 1985, pp.675-676. (in Japanese)