

**Zeitschrift:** IABSE reports = Rapports AIPC = IVBH Berichte  
**Band:** 73/1/73/2 (1995)

**Artikel:** Strengthening of gravity dams using post-tensioned anchors  
**Autor:** Xu, Haixue / Benmokrane, Brahim  
**DOI:** <https://doi.org/10.5169/seals-55303>

#### **Nutzungsbedingungen**

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

#### **Conditions d'utilisation**

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

#### **Terms of use**

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

**Download PDF:** 19.02.2026

**ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>**

## Strengthening of Gravity Dams Using Post-Tensioned Anchors

Renforcement des barrages poids à l'aide d'ancrages précontraints

Verstärkung der Schwerkraft-Dämmen  
mit Hilfe von nachgespannten Ankern

### Haixue XU

Research Associate  
University of Sherbrooke  
Sherbrooke, PQ, Canada



Haixue Xu got his B.Eng and M.Eng. degrees in Mine Building Eng. at the Northeastern Univ., China, and Ph.D. degree in Civil Eng. at the Univ. of Bradford, UK. Interests: ground anchors, advanced composite materials and strengthening/rehabilitation of structures.

### Brahim BENMOKRANE

Associate Professor  
University of Sherbrooke  
Sherbrooke, PQ, Canada



Brahim Benmokrane got his Civil Eng. degree at Swiss Fed. Inst. of Technology, Lausanne, and Ph.D. degree at the Univ. of Sherbrooke, Canada. Interests: ground anchors, concrete, rehabilitation and strengthening of structures, advanced composite materials.

### SUMMARY

Many old gravity dams are in need of rehabilitation as a result of ageing, deterioration, deficiencies in design and construction, and more stringent safety standards. Post-tensioned anchors are the most practical and cost-effective method for strengthening concrete gravity dams subjected to direct tension, sliding, overturning, and seismic loading. This paper reviews 27 case histories of concrete gravity dams strengthened by cement grouted multi-strand post-tensioned anchors. The general design of post-tensioned anchors for strengthening gravity dams is outlined.

### RÉSUMÉ

De nombreux barrages poids doivent être consolidés suite au vieillissement, à la détérioration, aux déficiences dans la conception et la construction, et aux normes de sécurité plus sévères. La post-tension par ancrages est la méthode de renforcement la plus pratique et la moins onéreuse pour les barrages poids en béton soumis à une tension directe, glissement, renversement ou à un séisme. Cet article décrit 27 cas de barrages poids en béton renforcés à l'aide d'ancrages précontraints composés de câbles injectés au coulis de ciment. La conception générale des ancrages précontraints pour le renforcement des barrages est présentée.

### ZUSAMMENFASSUNG

Viele der alten Schwerkraftdämmen sind renovierungsbedürftig aufgrund der Alterung, Abnutzung, Mangel in Plan und Konstruktion, sowie strenger werdender Sicherheitsnormen. Benutzung von nachgespannten Ankern ist die praktischste und kostengünstigste Methode für die Verstärkung von Beton-Schwerkraft-Dämmen, welche der direkten Spannung, Rutsch- und Umlippgefahr, und Erdbebenlasten ausgesetzt sind. In diesem Artikel werden 27 Fälle dargelegt, in denen Beton-Schwerkraft-Dämmen mit vorgespannten Ankern verstärkt worden sind. Allgemeine Entwürfe und Bauarten vorgespannter Anker für die Verstärkung von Schwerkraftdämmen werden beschrieben.



## 1. INTRODUCTION

Many old gravity dams are in need of rehabilitation as a result of aging, deterioration, deficiencies in design and construction, and more stringent safety standards. Post-tensioned anchors are the most practical and cost effective method for strengthening gravity dams. The application of the post-tensioning force increases the frictional resistance at the concrete/rock interface and the moment against overturning, and reduces uplift pressures underneath the dam and tensile stresses on the upstream face. Post-tensioning a gravity dam can be an especially suitable remedial under the following conditions: 1) where the lift joins were inadequately treated during construction and so were weak in tension and shear; 2) when drawing down reservoir level is restricted due to the intolerable economic loss; 3) preservation of historical structures is required; 4) the space on the downstream face is limited for adding concrete mass; and 5) adding concrete is objectionable as in seismically active areas. The post-tensioning technique requires minimum demolition, has only minor impact on the structure, and is relatively inexpensive by using a small number of anchors.

Table 1 shows some gravity dams strengthened using cement grouted post-tensioned anchors in the last 20 years for the various reasons: 1) upgrading to the Probable Maximum Flood (PMF) (11 dams); 2) raising dam height (5 dams); 3) upgrading to the Maximum Credit Earthquake (MCE) (4 dams); 4) deficiencies in design (2 dams); 5) stabilizing concrete cracks (2 dams); and 6) others (4 dams). A dam may have more than one reason for rehabilitation. Post-tensioned anchors are most commonly used to meet the new design criteria relating to the updated PMF and MCE that expect much greater loads acting on a dam.

Steel strands are widely used for post-tensioned anchors due to their high strength, ease of tendon transport and storage, and considerable length. Recently, a comprehensive research program is being conducted on the strengthening and rehabilitation of gravity dams using post-tensioning techniques at the Université de Sherbrooke. This includes: 1) using various types of tendon strands such as conventional strands, epoxy-coated strands, and fibre reinforced plastic (FRP) strands; 2) developing instrumentation systems such as using vibrating wire gauges and optical fibre sensors; 3) investigating the performance of post-tensioned anchors in dam rehabilitation. On reviewing 27 case histories, anchor dimensions used in dam rehabilitation are summarized. The general design of cement grouted multi-strand post-tensioned anchors for strengthening gravity dams is highlighted.

## 2. DESIGN METHODS

Each anchor installed in a dam should be regarded as permanent. Therefore, corrosion protection is a vital and integrated part of anchor design and construction. The anchor design consists of mainly the overall stability of the strengthened dam, fixed anchor dimensions, and anchor embedment depth.

### 2.1 Overall Stability of a Strengthened Gravity Dam

The stability analysis of an old gravity dam strengthened with post-tensioned anchors can be accessed in the manner as for a normal gravity dam, with the addition of an extra stabilizing force from the anchors. Post-tensioned anchors for dam rehabilitation should be installed as near as practicable to the upstream face of the dam to provide the greatest stabilizing moment. Basically, a gravity dam should be safe against overturning at its toe and against sliding along the concrete-rock interface or at any weak plane within the foundation. The loads acting on a dam

consist of the hydrostatic loads ( $H_1$ ,  $H_5$ ), uplift load ( $V_2$ ), inertia loads of water ( $H_6$ ) and concrete ( $H_7$ ,  $V_3$ ) due to seismic activity, and excess loads due to silt ( $H_2$ ), ice ( $H_3$ ), and impact of waves ( $H_4$ ), as shown in Fig. 1. The post-tensioned anchor ( $F$ ) will counteract, together with the dead concrete weight ( $V_1$ ), against overturning and sliding of the gravity dam. Stability against sliding along the concrete-rock interface and overturning about its toe is expressed as:

Sliding:  $SF = \frac{Ac + (V_t + F)f}{H_t}$  [1]

$$\text{Overturning: } \frac{\Sigma \text{MW} + \text{MF}}{\Sigma \text{MV}} \geq F_s \quad [2]$$

where  $SF$  = shear friction factor;  $A$  = contact area of the base;  $c$  = unit shear resistance at the base;  $H_t$  = total horizontal load;  $V_t$  = total vertical load;  $f$  = coefficient of internal friction at the base;  $F_s$  = designated factor of safety;  $\Sigma MW$  = summation of anti-clockwise moments of forces  $V_1, H_5$  about point  $O$ ;  $\Sigma MV$  = summation of clockwise moments of forces  $H_1, H_2, H_3, H_4, H_6, H_7, V_2, V_3$ , about point  $O$ ;  $MF$  = moment of force  $F$  about point  $O$ .

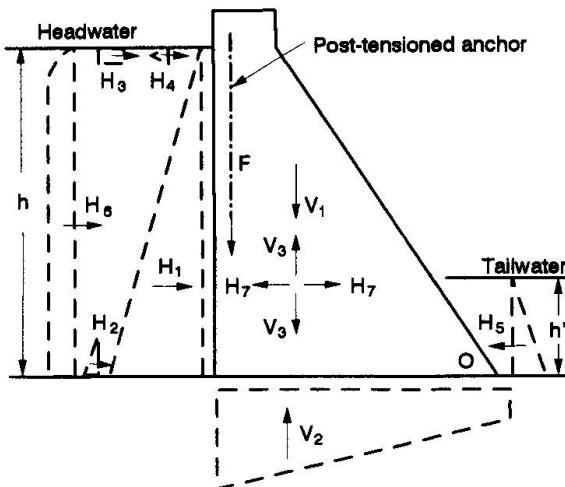


Fig. 1 Loads acting on the section of a gravity dam

The loads acting on a dam are generally categorized as usual, unusual and extreme. Post-tensioned anchors are usually used for the unusual and extreme loading situations that are based on the usual load combination with the PMF level, instead of the normal design reservoir level, and the usual load combination acting together with the MCE, respectively. The recommended factor of safety should be 2.0 and 1.3 for the unusual and extreme load combinations [18]. The force for individual anchor can be obtained from the above equations and is based on the dimension of dam crest, anchor spacing requirement and availability of anchor capacity. Most codes require a design working load of  $0.5f_{pu}$  (ultimate load of anchor tendon) with a factor of safety of 2 for permanent anchors. However, an analysis of anchors in Table 1 shows that a higher design working load of  $0.6f_{pu}$  is commonly used for permanent anchors. An even higher working load of  $0.65f_{pu}$  has been used for several dams in Australia where the anchors are monitorable at any time. Currently, the anchors installed at Burrinjuck Dam in Australia are the largest ones in the world, which consist of 63 No. 15.2 mm strands with a maximum capacity of 16500 kN and an overall length of 128 m [9].

## 2.2 Fixed Anchor Dimensions

The design approach to calculate the fixed anchor dimensions has been based on an assumed uniform bond stress between the grout and the rock [19]. Generally, the ultimate bond stress depends on the shear strength of the rock, the grout strength, and the method of construction. In UK practice [21], it is required that the ultimate bond strength used in the design should not exceed the minimum shear strength for rock with uniaxial compressive strength (UCS) less than 7 N/mm<sup>2</sup>, and can be taken as 10% of the UCS of the rock for strong rock but should not exceed 4.0 N/mm<sup>2</sup> for UCS value exceeding 40 N/mm<sup>2</sup>. Cement grouts with water-cement ratios of 0.40 to 0.45 are commonly used in practice and the rock/grout bond values recommended for design can be found elsewhere [18, 19, 21].



The fixed anchor length should be neither less than 3 m nor greater than 10 m [20]. For a short bond length (less than 3 m), sudden changes in rock quality along the fixed anchor zone as well as any constructional errors may induce a significant decrease in pull-out capacity. On the other hand, fixed anchor lengths of 10 to 12 m are considered useful only in particularly weak rocks such as mudstones and shales [21]. An analysis of anchor bond length in Table 1 shows that the bond lengths are generally in the range of 5.5 to 10 m. Anchors with a longer bond length up to 16 m have also been seen in practice. One of the extreme example is at Lake Lynn Dam, where a bond length of 18 to 40 m was used in clayey siltstone [6].

Fixed anchor diameters depend mainly on the size of tendon, corrosion protection requirements, size of drilling bit, and ground conditions. The practical hole sizes adopted in dam rehabilitation generally range from 114 to 330 mm (4.5 to 13 inch). Anchor spacing affects the behaviour of individual anchors. In dam rehabilitation, the minimum spacing is governed by practical requirements such as hole tolerances to avoid deep anchor crossing in the drilling line, anchor capacity, applied load per meter length of the dam, and rock mass discontinuity spacing. An analysis of anchor spacing in Table 1 shows that anchor spacing is generally in the range of 0.9 to 5.5 m with a more common range of 1.5 to 2.5 m.

### 2.3 Anchor Embedment Depth

The load of an anchor is resisted by the weight of a mobilized rock mass beneath the dam. Two alternative methods are used to determine the size of the mobilized rock mass. The pull-out cone method assumes that an inverted cone of rock is pulled out of the rock mass for a single anchor at failure. The weight of rock mass mobilized is calculated using the volume of the cone and the submerged weight of rock situated below water table. The wedge method assumes that the foundation rock is tied to the dam to against overturning with the dam. Case study has shown that the assumed cone method is more common than the wedge method in practice.

Current design approaches ensure that anchors are embedded deep enough so that failure of the tendon or at the grout-rock interface occurs before the rock mass being pulled-out. Over the years, the choice of apex cone position has been varied from the base of the anchor, the middle of the fixed anchor to the top of the fixed anchor. In dam rehabilitation, apex cone positions are usually chosen at the top or at the middle of the fixed anchor, and are often dictated by the surrounding ground conditions. It suggests that the apex cone position be taken at the middle of the fixed anchor when considering load transfer by bond [19, 20].

Generally, the included angle of inverted cone is assumed to be 90° in sound homogeneous rock with the apex at the bottom of the fixed anchor, and 60° in weak or highly jointed rock masses with the apex at the middle or at the top of the fixed anchor. When groups of closely spaced anchors have their fixed anchor zones located in the same rock horizon and the rock mass is horizontally bedded, a laminated failure could occur. As a result, it is necessary to incline the fixed anchor further apart or stagger the fixed anchors at different depths in order to reduce the intensity of stress on any plane.

## 3. SUMMARY

Based on reviewing 27 case histories, anchor dimensions used in dam rehabilitation are summarized. The general design of post-tensioned anchors for strengthening gravity dams is briefly described.

Country-Dam	Dam height (m)	Anchor no.	Strand tendon (mm)	Design capacity $T_c$ (kN)	Design load (% $T_c$ )	Bond length (m)	Anchor spacing (m)	Hole size (mm)	Anchor length (m)	Ref.
USA-Minidoka	*	7	44/15.2	11458	60	7.6	5.5	254	35	[1]
USA-Morgan Falls	16.8	100	31/12.7	6461	55	9.0	*	165	*	[2]
USA-Rainbow	8	6	Strand	4447	60	*	4.5	152	22	[3]
USA-Ryan	27	31	45/12.7	9576	60	16.2	0.9	203	49	[3]
USA-Crescent	12.2	151	12/15.2	3600	52	*	*	*	31	[4]
USA-Conowingo	30.4	537	20/15.2	5300	60	8.4	2.8	190	61	[5]
USA-Lake Lynn	38.1	75	58/15.2	15118	60	39.9	2.0	280	92	[6]
USA-Shepaug	40	97	53/15.2	13789	59	14.9	1.8	254	59	[7]
USA-Libby	128	100	16/12.7	2936	60	6.1	*	127	46	[8]
Australia-Cataract	54	*	55/15.2	13750	60	*	2.5	310	84	[9]
Australia-Burrinjuck	79	161	63/15.2	16500	65	*	1.5	310	128	[9]
Australia-Nepean	76	*	63/15.2	16500	57	*	2.0	314	119	[9]
Australia-Goulburnweir	15	*	27/15.2	6750	*	*	1.8	200	*	[9]
Australia-Hume	51	*	55/15.2	13750	65	*	*	312	85	[9]
Australia-Warragamba	137	*	63/15.2	16500	60	*	2.5	310	112	[9]
Australia-Maroondah	47	*	52/15.2	13670	*	*	3.6	305	*	[9]
Australia-Bickley	13	*	12/15.2	3150	*	*	1.2	165	*	[9]
Australia-Manly	19	46	24/15.2	6000	60	*	5.0	215	43	[9]
Iran-Sefid Rud	106	*	54/15.2	14000	54	*	*	*	40	[10]
Morocco-L. Taberkoust	57	54	49/15.2	12625	53	*	*	*	115	[10]
Australia-Tenterfield	15	>44	12/12.5	2508	62	5.5	1.8	114	24	[11]
Germany-Eder	47	104	34/15.2	8800	52	10.0	2.3	273	75	[12]
UK-Mullardoch	50	26	37/15.2	11100	42	5.4	1.5	330	55	[13]
Brazil-Rasgao	22	80	12/12.7	2232	45	*	1.0	*	*	[14]
Pakistan-Tarbela	148	576	16/15.2	4170	60	6.0	*	165	38	[15]
Uganda-Owen Falls	*	115	12/15.2	3180	62	8.0	*	131	36	[16]
Zimbabwe-Sebakwe	38.8	80	38/15.2	9905	60	8.0	*	175	70	[17]

Note: \* = data not available

Table 1 Concrete gravity dams strengthened using multi-strand post-tensioned anchors



## REFERENCES

1. BAALS Jr J.R. and RUCHTI, P.M. The Stabilization of Minidoka Powerplant and Dam. *Waterpower' 91, Int. Conf. on Hydropower*, New York, NY, 1991, 1278-1287.
2. PATRICK J.O. and MURRAY A.W. Changing Stability Criteria: Effect on Older Dams. *Waterpower' 85, Int. Conf. on Hydropower*, Las Vegas, NV, 2, 1985, 1382-1391.
3. EMMERLING C.L. Montana Power Company's Dam Repair Program. *J. of the Construction Division, Proc. of the American Society of Civil Engineers*, Sept., 1972, 295-311.
4. SUMNER A.C., NASH M.F. and HAAG T.W. Rehabilitation of the Dams at the Crescent and Vischer Ferry Hydroelectric Projects. *Waterpower' 91, Proc. of the Int. Conf. on Hydropower*, New York, NY, Part 3, 1991, 1485-1494.
5. MARCINKIEWICH E.A. and EPHROS A.Z. Dam Anchored to Foundation to Withstand Floods. *Civil Engineering, ASCE*, April, 1978, 55-59.
6. BRAGG R.A., WIMBERLY P.M. and FLAHERTY T. Anchoring a Dam. *Civil Engineering, ASCE*, Dec., 1990, 38-41.
7. BRUCE D.A. and CLARK J.H. The Stabilization of Shepang Dam, CT, using High Capacity Prestressed Rock Anchors. *Asso. of State Dam Safety Officials 6th Annual Conf.*, Albuquerque, 1989, 136-145.
8. BURO M. Rock Anchoring at Libby Dam. *Western Construction*, March, 1972, 42, 48, and 66.
9. CAVILL B. Very High Capacity Ground Anchors Used in Strengthening Concrete Gravity Dams. *FIP XIIth Int. Cong.*, Washington, May 29-June 2 1994, B30-B38.
10. CORNUT R. Heightening of Dams by Means of Prestressed Anchors - Experience and Perspective. *18th Int. Congress on Large Dams*, Durban, South African, 2, 1994, 211-221.
11. HETHERINGTON J.W. Construction Methods Used in Raising Tenterfield Dam. *Civil Engineering Transactions, The Inst. of Engineers, Australia*, 17(1), 1975, 37-39.
12. WITTKE W. and SCHRODER D. Upgrading the Stability of the Eder Masonry Dam. *The Int. J. on Hydropower and Dams*, 1(5), 1994, 57-66.
13. HINKS J.L., BURTON I.W., PEACOCK A.R. and GOSSCHALK E.M. Post-tensioning Mullardock Dam in Scotland. *Water Power and Dam Engineering*, Nov., 1990, 12-15.
14. BUDWEG F.M.G., MIGUEZ DE MELLO F. and MASAYOSHI J.G. Rehabilitation of Rasgao Dam. *15th Int. Cong. on Large Dams*, Lausanne, 4, Switzerland, 1985, 171-189.
15. WATER POWER and DAM CONSTRUCTION. Use of Rock Anchors at Tarbela, Feb., 1978, 44-47.
16. ARCANGELI E. and STELLA C. The Use of Prestressed Anchors at the Owen Falls Refurbishment. *Water Power and Dam Construction*, January, 1993, 23-30.
17. WATER POWER and DAM CONSTRUCTION. The Use of Rock Anchors to Heighten a Concrete Dam. March, 1984, 36.
18. XANTHAKOS P.P. *Ground Anchors and Anchored Structures*. John Wiley and Sons, New York, 1991.
19. LITTLEJOHN G.S. and BRUCE D.A. *Rock Anchors: State-of-the-Art*. Foundation Publications Ltd., Brentwood, Essex, England, 1977.
20. BRITISH STANDARDS INSTITUTION. *British Standard Code of Practice for Ground Anchorages, BS8081*. 2 Park Street, London, 1989.
21. BARLEY T. Ten Thousand Anchorages in Rock. *Ground Engineering*, 1988, 21(6), 20-29, 21(7), 24-35, 21(8), 35-39.