

Zeitschrift: IABSE reports = Rapports AIPC = IVBH Berichte
Band: 999 (1997)

Artikel: Composite rahmen railway viaduct of PPC beam and steel box beam
Autor: Tabata, Harumi / Kamata, Norio / Ishibashi, Tadayoshi
DOI: <https://doi.org/10.5169/seals-1096>

Nutzungsbedingungen

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

Conditions d'utilisation

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

Terms of use

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

Download PDF: 13.12.2025

ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>

Composite Rahmen Railway Viaduct of PPC Beam and Steel Box Beam

Harumi TABATA
Assistant Manager
East Japan Railway Co.
Tokyo, Japan

Tadayoshi ISHIBASHI
Dr. Engineer
East Japan Railway Co.
Tokyo, Japan

Norio KAMATA
Deputy Manager
East Japan Railway Co.
Tokyo, Japan

Yasuaki HOSOKAWA
Assistant Manager
East Japan Railway Co.
Tokyo, Japan

Summary

The railway viaduct required aesthetic improvements, as the space under the bridge was to be used as a footpath, so it was required to reduce both the number of pillars on this viaduct and, further, to reduce the diameter of the pillars. Consequently, the beams were basically constructed in the form of a PPC box-type, and at places where the bridge is long, the structure fashioned as a steel box beam. The piers were made of steel pipe wound RC pillars. In order to increase the bridge's anti-earthquake properties, the structure was converted to a complex Rahmen viaduct which is unified between these 2 types of beams and piers. This report describes the materials and design of these connectors.

1. Circumstances

At the time of Nagano Winter Olympic Games in 1998, the Hokuriku Super Express will be extended to Tokyo Station. To accommodate this extension, a railway viaduct on the Chuo-Line (about 970 m in length) is to be constructed. This viaduct was constructed taking into considerations the scenery surrounding the Tokyo Station which is noteworthy as the gateway of Japan (Figure-1).

2. Whole structure

The pillars of this viaduct were made of reinforced concrete (RC) on the railway side and steel pipe wound RC on the road side, making the shape on each side very different (Figure-2). If a pier is made into a single gate-type structure, when a large sideways horizontal force is applied such as in the case of an earthquake, because of the difference in displacement in the upper end of the pier, a large distortion occurs in the pier. For this reason, the entire viaduct was made into a Rahmen structure of multiple lengths, and the rigidity of the entire body (against plane distortion) was increased.

3. Connection of beam and pier

As for the structural form of the upper area, the general parts were made of PPC beam, but the parts of the crossing over the road were made of steel box beam because the length of bridge was relatively long (39 m.) The viaduct was in the form of a complex Rahmen structure which unified 2 types of beams as well as the crossbeams of the piers. The connecting part of the beam and the pier is shown in Figure-3. The design of the connecting part was made so as to secure an adequate

safety ratio ($F=1.0$) against the destruction of the cross section material, and to prevent stretching stress at the time of active load effects, considering the influence of temperature. As an example of PC cable arranged to this connecting part, there is a $12E15.2 \times 6$ set at the upper position of original point.



Figure-1 Viaduct completion forecast picture

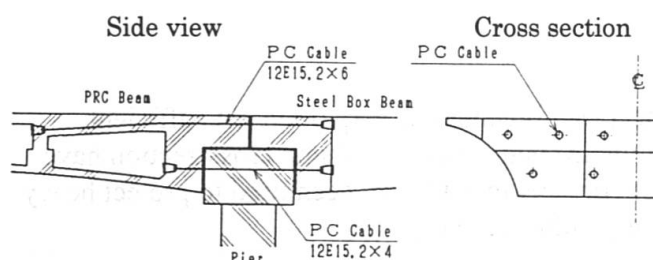


Figure-3 Connecting parts between beam and pier

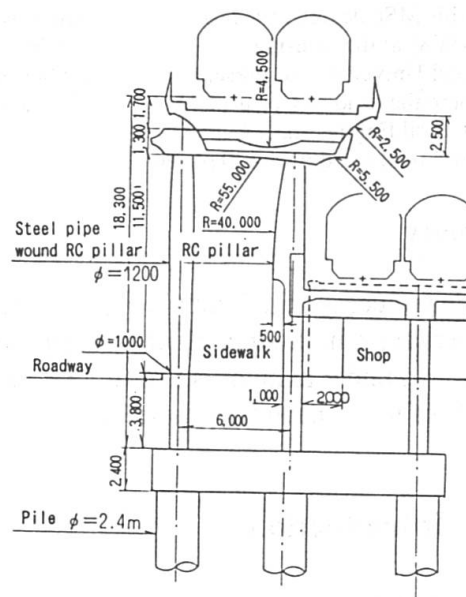


Figure-2 Cross section of viaduct (unit:mm)

4. Connections between steel pipe wound RC pillars and footings

As shown in Figure 1, the pillars of the viaduct on the left side were planned between the road and the footpath. Therefore, the pillar was to be made as thin as possible in order not to obstruct the passage of pedestrians. To cope with these demands, and considering the scenery, the pillars were made to a diameter of 1.0 meter on both ends and 1.2 meters in the center in the shape of an entasis (shaped like a cigar.) As for the constitution of the cross-sections of the pillars, steel pipes were used as Stirrup, and steel pipe wound RC pillar were constructed so as to allot the stretching forces to the iron bars in the concrete. In order to decide the arrangement of the iron bars at the connecting part of the upper crossway beam and steel pipe wound RC, experiments in horizontal load changing, using a 1/3-size model; results were applied to the actual design.

5. Postscript

Investigations were made in accordance with the above descriptions; the particular nature of each structure was determined, and the structure was erected. This viaduct was completed in November, 1996, and the train is currently in operation. The Hokuriku Super Express will begin operation starting in Autumn, 1997.