

**Zeitschrift:** IABSE reports = Rapports AIPC = IVBH Berichte  
**Band:** 999 (1997)

**Artikel:** Timber-glass composite in structural glazing  
**Autor:** Natterer, Julius / Hamm, Jan  
**DOI:** <https://doi.org/10.5169/seals-1120>

#### **Nutzungsbedingungen**

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

#### **Conditions d'utilisation**

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

#### **Terms of use**

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

**Download PDF:** 17.01.2026

**ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>**

## Timber-Glass Composite in Structural Glazing

**Julius Natterer**

Professor

Federal Institute of Technology  
Lausanne, Switzerland

In 1970, he founds his own office specialised in timber construction first in Munich, then in 1983, in Switzerland.

In 1978, he is named director of the Chair of Timber Construction of the Swiss Federal Institute of Technology in Lausanne

**Jan HAMM**

Research Assistant

Federal Institute of Technology  
Lausanne, Switzerland

Received his civil engineering degree in 1994, since then he is Research Assistant at the Chair of Timber Construction in Lausanne.

His main research work at the Institute is timber-glass composite in structural glazing. Timber-glass composite in structural glazing

### Summary

In the normal application of glass in buildings, glass panels are mounted in frames and designed to carry their self-weight, wind and snow load, which are then transmitted to the supporting structure. The timber-glass concept is a mixed structure of glass and wood, with both components acting as the supporting structure. This paper aims to present the problems related to such structures, and the solutions proposed by our research.

### Introduction

More and more architects and engineers are looking for an ecological way of construction. Glass is an ecological material in the sense that we can economise energy for heating and for light, if used in construction. In the same way wood is an ecological material because it is the only renewable raw material that stores carbondioxide which is necessary for wood growth. Less energy is needed to fabricate a timber beam compared to metal, aluminium or concrete. Therefore, timber and glass are often used in combination for construction like for greenhouses or facades.

In the traditional (not composite) timber and glass construction, the beam-sections are often so important, that it causes problems with aesthetic and natural lighting. So a timber-glass composite element has been developed, where the wooden frame is directly glued to the glass-plate (fig.I).

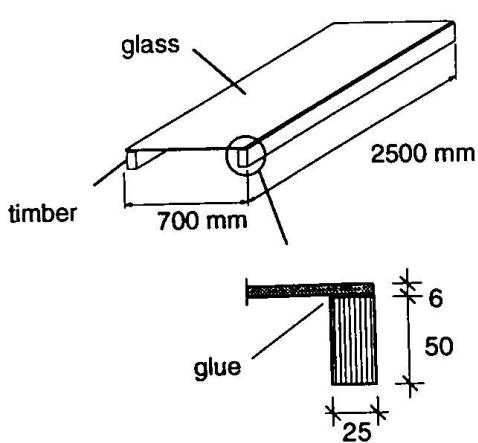
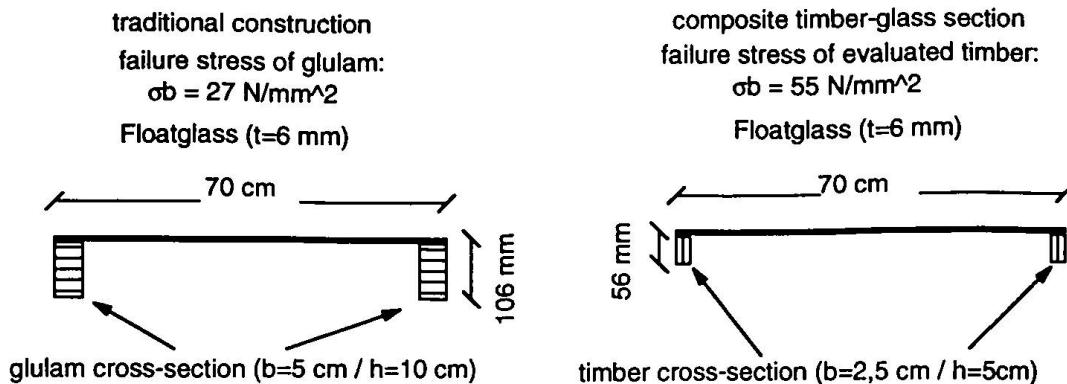


fig.I: composite element timber-glass

A comparison between the traditional and the composite structure shows that the wooden sections are much smaller with timber-glass composite structures (fig.II, next page).

This kind of composite structure has the following advantages:

- prefabricated sections
- minimal cold bridges
- optimised energetic profit
- light structure
- ecological
- economical



*fig.II: comparison between the traditional and the composite structure*

## Tests

To find the right glue for the timber-glass composite structure, several small specimens have been tested under shear compression loading. Because the composite elements are under climatic variations the test specimens were submitted to several cycles. One cycle consisted of 4 hours at -30°C, 4 hours at +70°C, 16 hours at +30°C and 80% humidity. This cycle was repeated up to seven times and specimens were tested after 0-cycle, 2-cycles, 5-cycles and 7-cycles to evaluate the possible degradation. Of the four glues which were tested, only one resisted to the stress-test.

After the right glue was found, 4-point loading tests on timber-glass composite plates were executed. The results of these tests showed that the efficiency of the glueing was nearly 100%. The rupture of these elements was due to the excess of the tensile-bending stress in the wood (in average: 66,24 N/mm<sup>2</sup>).

## Conclusion

The goal of this research is to develop composite timber-glass elements for structural glazing. A glue has been found and tested by shear compression loading after several climatic cycles. It was proven, that composite elements which are loaded perpendicular to its plane has a high rigidity and resistance. The research-team of timber-glass composite for structural glazing is now testing composite elements as shear-walls to stabilise greenhouses and facades. Also composite timber-glass beams will be tested.

## References

Savoy, Eric; *Traité technique du verre*;  
Imprimerie André Demierre SA (1989)

Couvrat, Patrice; *Le collage structural moderne- théorie & pratique*;  
TEC & DOC - LA VOISIER (1992)

Kollmann, F.F.P; *Principles of Wood Science and Technology*;  
Volume I, Springer-Verlag, Berlin (1984)