

**Zeitschrift:** IABSE reports = Rapports AIPC = IVBH Berichte  
**Band:** 999 (1997)  
  
**Artikel:** Steel-concrete structures in 24 storey bank building in Bratislava  
**Autor:** Kozak, Juraj / Distler, Pavel  
**DOI:** <https://doi.org/10.5169/seals-1021>

### **Nutzungsbedingungen**

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

### **Conditions d'utilisation**

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

### **Terms of use**

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

**Download PDF:** 05.09.2025


**ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>**

## Steel-Concrete Structures in 24 Storey Bank Building in Bratislava

### Juraj KOZAK

Consulting Structural Eng.  
Bratislava, Slovakia

Juraj Kozak, born 1922, received his Dr. techn. degree at the TU Bratislava, specialised in masts towers, tall buildings in steel, in composite and mixed technology.

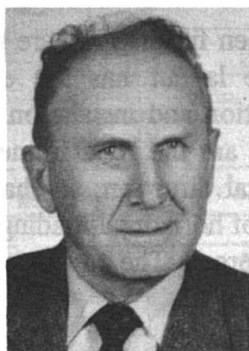

### Pavel DISTLER

Civil Engineer  
Bratislava, Slovakia

Pavel Distler, born 1961, graduated from the Faculty of civil engineering of TU Bratislava, specialised as designer of steel and composite structures.



### Summary

Last trends in construction technology of multistorey buildings. Steel skeleton stiffened by means of concrete elements. Fire protection of steel parts solved by embedding concrete. By a combination of various material-structural elements and technology an optimum could be achieved. At VÚB-Center Building constructed in combined technology with dominance of concrete have been solved by means of steel in the most exposed parts: the inner piers in ground floor cantilevered transverse plate with embedded steel grid, the statically most exposed facade columns.

### 1. Structural and construction technology of multistorey buildings-last trends

The multistorey buildings for civil and industry purposes could be realized in various structural, material and construction technology. It is to accent the great liaison of all these components. A competition exists among the construction systems, concerning the choice many and various criteria are important, often of conjunctural character and different in the countries. In steel skeleton some development trends could be distinguished:

1. Pure steel skeleton is rarely used, the spatial stability is mostly achieved by means of concrete elements, e.g. by concrete floor slabs, shear walls and cores.
2. The minimalisation of structural parts designed in steel - e.g. steel-sheet and r. concrete floor slab substituted by r. concrete slab, beam elements and/or columns by composite ones
3. The minimalisation of steel parts which have to be protected against corrosion and fire. The most simple and cheap solution is their embedding with concrete.
4. To enable the joining at concrete structures the use at progressive components - in formwork, reinforcing, geometry accuracy, precasting etc.
5. As last trend to win an optimal solution is a mixed structural system using various material-structural parts and/or elements and by following in-situ concrete to achieve a stiff monolithic structure. The following described building is realized in that technology.

## 2. VÚB - Bank Center building in Bratislava

### 2.1 Generally about the building

In Bratislava a 24 storey bank building has just been finished, where a combination of steel-concrete structures has been used (Fig. 1). The layout has the ellipse form with main dimensions of 25,2 x 48,0 m with the communication and instalation core 10 x 18 m in the excentrical position (Fig. 2). In the cross direction are the rigid frames in 6 m distance with middle span of 9,6 m, enough flexible in horizontal direction, so that their participation on carrying horizontal loading is negligible, all effects of horizontal loading is carried by the core with joined shear walls supplemented by torsion forces. The top part of the ellipse is in the ground floor cantilevered 6 m.

For bearing structures a mixture of various material technology has been used:

- in-situ concrete: the core, shear walls and the inner columns
- in precast concrete: the peripheral elliptical parapeth girders, most facade columns
- in composite concrete: the floor structures with prefabricated lower part and in-situ concrete upper layer (slab and cross beams)
- composite steel - reinforced concrete: the inner columns in 1<sup>st</sup> and 2<sup>nd</sup> floor, the transverse plate over 2<sup>nd</sup> floor carrying cantilevered part of the building, the most statically exposed facade columns.

In this paper we pay attention to the composite steel-reinforced concrete structures.



*Fig. 1. View on building during erection*

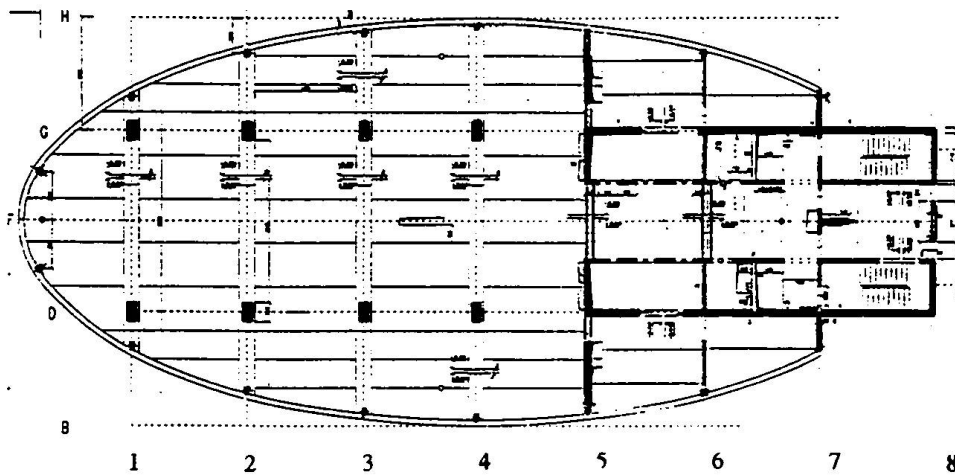


Fig. 2. Layout of typical storey

## 2.2 Composite inner piers

The inner piers in the ground floor are extreme loaded at axis 1 by an axial force of  $N_d = 26\ 800\ \text{Kn}$  and in the axis 2 and 3 by  $N_d = 16\ 800\ \text{kN}$  and demanded small dimensions of 1200/600 or 1000/500 mm respectively. If the need of structural clear seating of steel grid in transverse plate is respected, it is suitable to use for piers the composite steel-concrete form (Fig. 3). The piers have two welded I profiles which carry about 50% of designed normal force. The piers are boarded with a steel plate stiffened by vertical plates, the reinforcing bars are joint to them by welding. On the site were delivered the steel structures of piers included of reinforcing bars completed in two storey length.

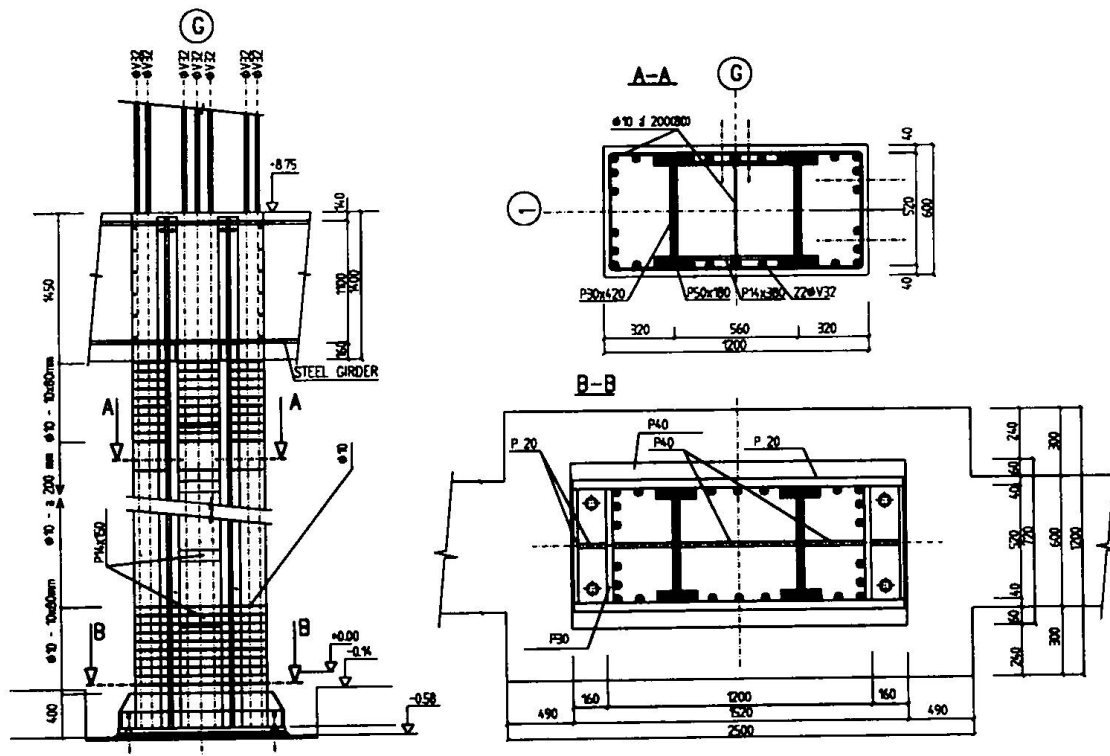


Fig. 3. Composite inner piers in ground floor

### 2.3 Cantilevered transverse steel-concrete plate over 2<sup>nd</sup> storey

Four facade columns situated in modulus 0 - 1 acting with normal forces about 5000 kN are based on the elliptical transverse plate. The statically exposed transverse plate demand the height of  $1,20 \div 1,40$  m, similar to the upper peripheral girders. The designed facade coating demands a very strong stiffness (the deflection of the top  $y_{\max} \leq 20$  mm, declination on the periphery  $\text{tg } \chi \leq 0,0015$ ). The site and construction conditions were not good for prestressed r. concrete, therefore the following solution was elected (Fig. 4):

- steel grid of 1,10m height in two fields with 6 m cantilevered console, elliptical layout, seated on composite piers, built from transversal and longitudinal girders dimensioned on dead load of 1,40 m concrete slab
- precast lower plates of 90mm height suspended on the steel girders dimensioned on the 0,4 m concrete layer
- in-situ concrete with reinforcement bars concreted in two steps.

By this solution is achieved: quick construction tempo (no strong formwork, no technology break), precise geometry.

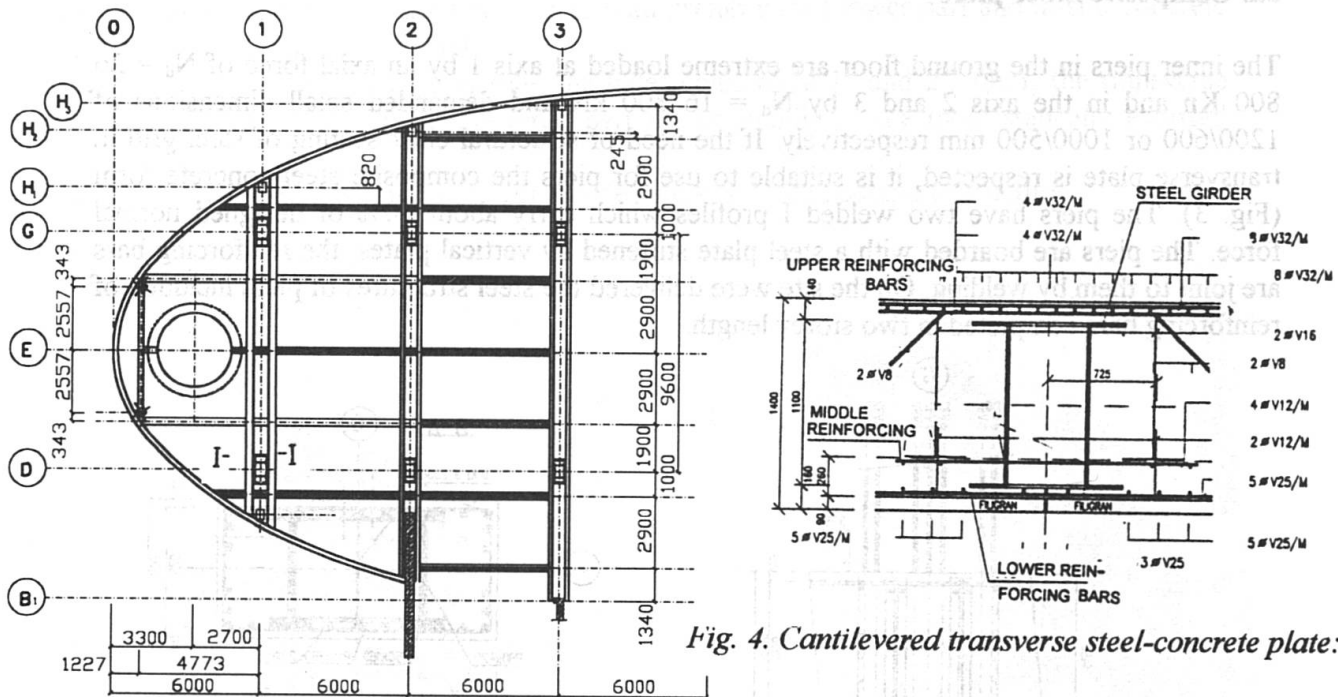


Fig. 4. Cantilevered transverse steel-concrete plate:

a - layout of steel grid, b - cross section



## 2.4 Precast facade columns

In spite of the normal forces in the columns varying from 1500 kN to 6200 kN the same rectangle size 30.40 m was elected.

The corresponding bearing capacity was achieved at constant total area  $A = A_s + A_b + A_p$  by combination of six parameters (index b - concrete, s - steel reinforcement, a - steel profile)

The total compression capacity was determined

$$N_{tot} = N_s + N_b + N_p = (A_s R_s + A_b R_b + 0,85 A_p R_p) \delta$$

where A-cross section area, R-design strength,  $\delta$ -buckling factor (expressing the influence of slenderness and of imperfections and loading excentricity). The minimum compression capacity is achieved at cross section with constructive reinforcement ( $A_s = 0,006A$ ), the middle one by higher quality of concrete and strong reinforcement and the max compression bearing capacity by addition of inner steel profile (Table 1).

The columns have been constructed as in shop prefabricated element. Most columns are of two storey length, fitted with short console for placing facade elliptical girders and crossing girders.

The contact joint is solved by means of steel boarding plate and screws (Fig. 5).







TYPE	CROSS SECTION	AREA [cm <sup>2</sup> ]	R <sub>i</sub> [N/mm <sup>2</sup> ]	MATERIAL	RESISTANC E N <sub>i</sub> [kN]	$\varphi$	N <sub>Rd</sub> [kN]
S 150		A <sub>s</sub>	R <sub>s</sub>		N <sub>s</sub>	0,803	1979
		A <sub>s</sub> = 6,2	R <sub>s</sub> = 375	O 10 425	N <sub>s</sub> = 232,5		
		A <sub>b</sub> = 1193,8	R <sub>b</sub> = 22	B 40	N <sub>b</sub> = 2626,5		
S 275		A <sub>s</sub>	R <sub>s</sub>		N <sub>s</sub>	0,812	2881
		A <sub>s</sub> = 36,6	R <sub>s</sub> = 375	O 10 425	N <sub>s</sub> = 1372,5		
		A <sub>b</sub> = 1163,4	R <sub>b</sub> = 22	B 40	N <sub>b</sub> = 2559,5		
S 350		A <sub>s</sub>	R <sub>s</sub>		N <sub>s</sub>	0,815	3642
		A <sub>s</sub> = 47,3	R <sub>s</sub> = 375	O 10 425	N <sub>s</sub> = 1773,8		
		A <sub>b</sub> = 1152,7	R <sub>b</sub> = 27,5	B 50	N <sub>b</sub> = 3169,9		
S 500		A <sub>s</sub> = 145	R <sub>s</sub> = 210	O 11 373	N <sub>s</sub> = 3045	0,785	5005
		A <sub>s</sub> = 24,6	R <sub>s</sub> = 375	O 10 425	N <sub>s</sub> = 922,5		
		A <sub>b</sub> = 1030,4	R <sub>b</sub> = 27,5	B 50	N <sub>b</sub> = 2833,6		
S 610		A <sub>s</sub> = 220	R <sub>s</sub> = 200	O 11 373	N <sub>s</sub> = 4400	0,785	6141
		A <sub>s</sub> = 32,2	R <sub>s</sub> = 375	O 10 425	N <sub>s</sub> = 1207,5		
		A <sub>b</sub> = 947,8	R <sub>b</sub> = 27,5	B 50	N <sub>b</sub> = 2606,4		

Table 1. Facade columns - cross section and compression capacity



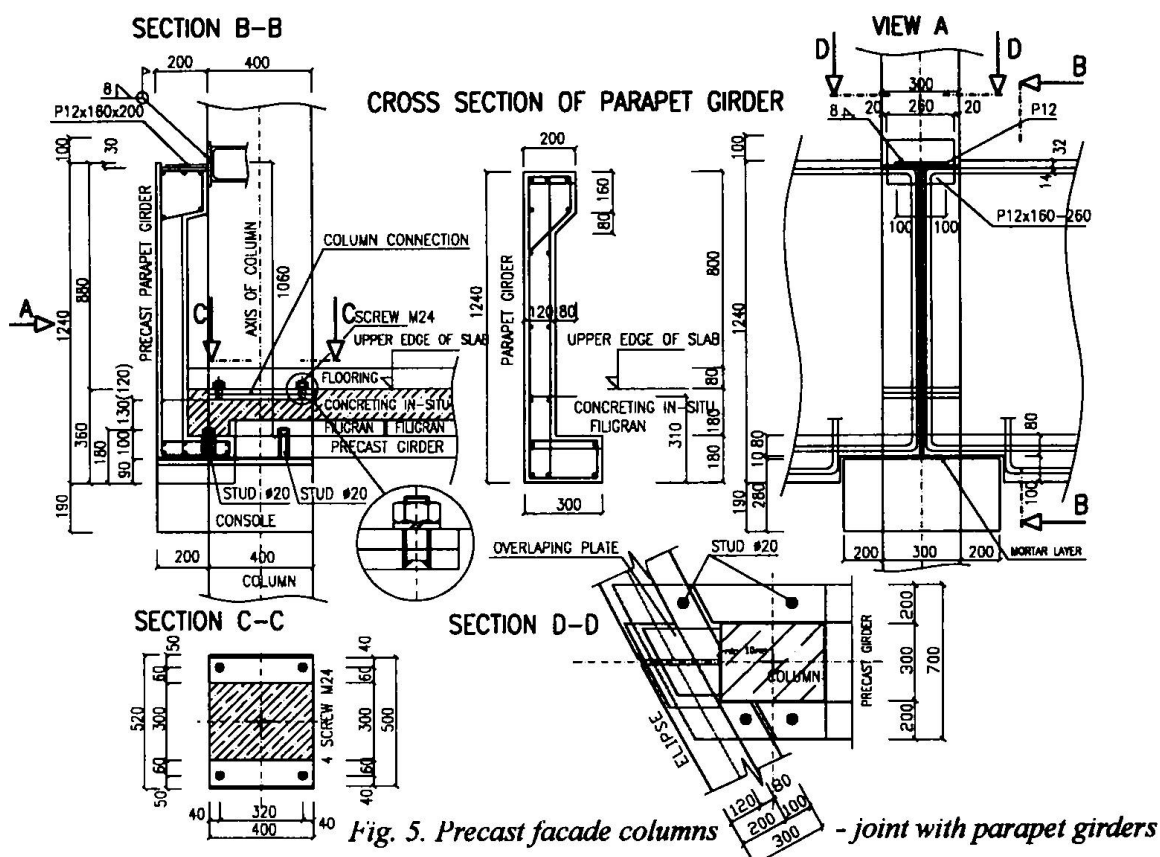

### 3. Experience results in combined technology realized building

**After our experiences, we could summarise:**

1. Combined structural system enables new architectural forms and realization technologies.
2. In comparison with complete steel solution: greater stiffness, rigidity and durability, simplified corrosion and fire protection, more structural complementation.
3. In comparison with complete concrete structure: smaller dimensions of the bearing elements, higher mass of structures which could be prefabricated, more precise geometry, shortening the erection time (namely in comparison with in-situ concrete).
4. New technology, short tradition, not enough knowledge from education process, structural designer obliged to know perfectly both materials.
5. Higher pretention on the coordination during the planning and realization.
6. The economical effects are in the region of indexes which are difficult to quantity - short time of realization, in the steel proper accuracy, clear static and structural system.

## References

1. Kozák J.: Structural system of concrete encased skeleton. Int. symposium Composite steel-concrete structures ČSVTS-IABSE, Bratislava, 1987, Vol. II.
2. Kozák J.: Steel-concrete structures for multistorey buildings, ELSEVIER, Amsterdam - Oxford - New York - Tokyo 1991
3. Kozák J.: Steel masts and towers (in Czech) SNTL Praha 1990
4. Kozák J.: Mixed and composite structural system in multistorey buildings In: ASCCS Conference, Košice 1994, Expertcentre Bratislava
5. Distler P., Šuppa F., Kozák J.: Steel-concrete structures of Czech bank Building in Prague. In steel structures and bridges 1994, Bratislava