

**Zeitschrift:** IABSE reports = Rapports AIPC = IVBH Berichte  
**Band:** 77 (1998)  
  
**Artikel:** Strengthening of structures with carbon fibre strips  
**Autor:** Haasis, Juergen  
**DOI:** <https://doi.org/10.5169/seals-58224>

### **Nutzungsbedingungen**

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

### **Conditions d'utilisation**

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

### **Terms of use**

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

**Download PDF:** 12.08.2025

**ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>**



## Strengthening of Structures with Carbon Fibre Strips

**Juergen HAASIS**  
Civil Engineer  
Sika Chemie  
Stuttgart, Germany



Juergen Haasis, born 1943 in Tuebingen, received his civil engineering degree from the Technical University Munich in 1969. Later on he issued structural safety approvals and since 1971 he is Field Manager for concrete refurbishment.

### Summary


Structural strengthening has always been state-of-the-art technology. Various reasons and causes such as change of use, damages or calculation errors are only some examples for cases where strengthening will become necessary. Conventional measures like strengthening with reinforced shotcrete are costly and often result in disturbingly enlarged cross-sections. Measures using bonded steel plates permit smaller cross-sections: A height increase will only become necessary if the safety margins in the compression section of the concrete are exhausted. Similar to the above described strengthening method with steel plates, but more elegant and thereby more versatile is the use of carbon fibre strips, a material which has proved its test of practice long ago, especially in aircraft construction and in the formula-one, as well as in the manufacturing of sports articles (tennis-rackets, etc.)

### Structural Strengthening with Carbon Fibre Strips

The classical theory of steel reinforced concrete is based on the model of a truss girder with horizontal ties and struts and diagonal members. The function of the horizontal as well as of the diagonal struts (as far as the values „remain within certain limits“) is taken over by the concrete, the function of the horizontal tie is taken over by the reinforcement. In case of change of use, damages or calculation errors it may become necessary to strengthen the horizontal tie, for adding tensile strength to the above truss girder model. This works only under condition that the cross-section in the compression section retains the appropriate reserves.

Bonded, additional external reinforcements, based on carbon fibre strips, are worldwide proved for approx. 10 years and have reached break-through in reinforced concrete construction. A general Technical Approval with the Number Z-36.12-29 of the „Deutsches Institut für Bautechnik (DIBt)“, Berlin, is available for the carbon fibre strips and for the adhesive. No matter which type of girders on cantilevered sections are concerned, the carbon fibre strip can in principle always be used wherever tensile forces have to be dealt with in the sense of truss girder analogy. The higher material cost of carbon fibre strips compared to steel plates is compensated by much easier application and by special advantages like unlimited lengths, easy handling and corrosion resistance. The strengthening on the rear side of a wrongly dimensioned supporting

wall is therefore an example for unrestricted use of carbon fibre strips , whereas bonded steel plates are unsuitable because they cannot safeguard longterm corrosion protection.

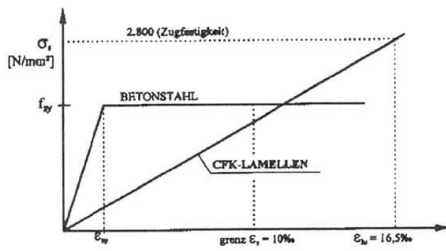

Contrary to steel, (see characteristic tension-elongation diagramme in Fig. 1), the carbon fibre strip shows an ideal elastic behaviour until break . The tension  $\sigma$  is ideally proportional to elongation  $\epsilon$  until break. The break occurs after approx. 16‰, the permissible elongation when strengthening a beam is limited to 8‰ in the Approval.

Fig. 1: Tension/elongation line steel/carbon fibre

As long as the ongoing research is not yet completed, transmission of compressive forces must be distributed with steel plates for the time being, analogous to the principles of steel reinforced concrete with the incorporation of ring bars. Carbon fibre strips are suitable for reinforced concrete, pre-stressed concrete, timber and steel. Strips are available with various E-moduli (3 types with 170, 210 and 300 Gpa). The thixotropic, filled epoxi adhesive is universally suitable for concrete, steel and wood. Two practical examples of strengthening measures on bridge constructions show the possibilities for the use of carbon fibre strips:

#### - Bridge Niederwartha (Dresden)

Unlimited use is now re-established after extensive repair measures in combination with carbon fibre strip strengthening.

#### - Bridge Meiningen

On this project re-structuring relied on combined measures: For the transmission of compressive forces, reinforced concrete was cast on top whereas the tensile strength on the underside was increased to the required level by carbonfibre strips as can be seen in fig. 3.

#### - Bridge Luzern

Wooden bridges are often classified as monuments. It is therefore essential that the increased safety demands are met with almost invisible measures without changing exterior appearance.

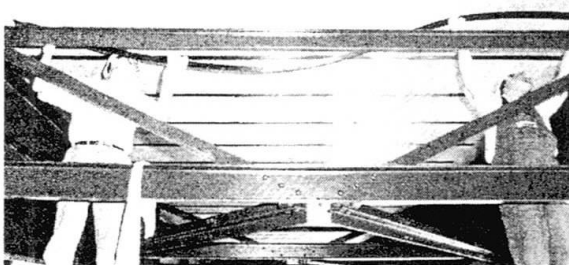


Fig. 2: Bridge Meiningen

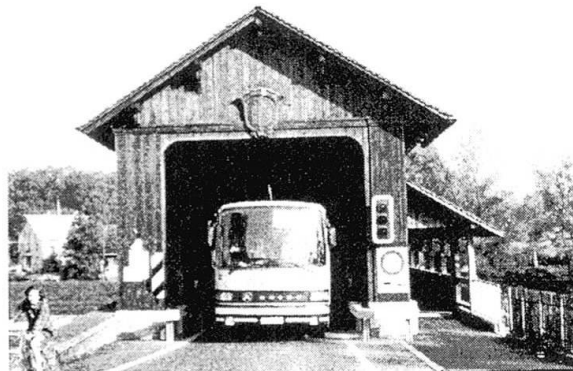


Fig. 3: Bridge Luzern