

Zeitschrift: IABSE reports = Rapports AIPC = IVBH Berichte
Band: 77 (1998)

Artikel: Fastening systems for suspended rear ventilated facades
Autor: Reinwarth, Peter
DOI: <https://doi.org/10.5169/seals-58242>

Nutzungsbedingungen

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

Conditions d'utilisation

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

Terms of use

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

Download PDF: 05.09.2025

ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>




Fastening Systems for Suspended Rear Ventilated Facades

Peter REINWARTH

Civil Engineer

BWM Duebel + Montagetechnik
Leinfelden-Echt., Germany

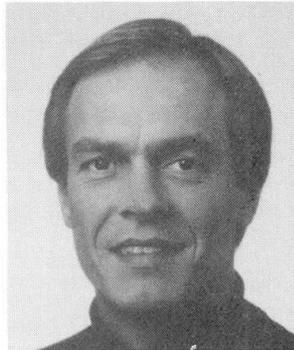

Peter Reinwarth, born in 1960, received his civil engineering degree from Stuttgart University. He is presently working with BWM - Duebel+Montagetechnik GmbH, Leinfelden-Echterdingen, Germany

Summary

The suspended rear ventilated facade in conjunction with appropriate insulation and supporting structure systems jointly offer optimal protection, preservation and embellishment for any building even in difficult situations.

Fascinating and original architectural effects can be obtained by utilising widely varying cladding material, surface structures, colours, formats, patterns, joint designs, structural sections and manifold attachment systems.

1. Rear ventilated facade

On new buildings as well as on existing buildings (maintenance, preservation and embellishment) the suspended rear ventilated facade system is the system that fulfills all the physical construction and design requirements for a facade: it insulates the structure from cold, heat and precipitation, it protects and decorates the building, it provides a comfortable environment inside the building, it saves heating energy costs, it permits diffusion of moisture.

Consequently the market offers a wide range of substructures for the different panel materials and systems with visible or hidden attachment.


In conjunction with a sophisticated anchoring the planner and architect is given a complete range of tools in order to give each facade an individually styled look.

2. Substructure principal and aspects to be considered


There are two categories of substructures (see fig. 1,2).

While the design of new buildings and their facades may be done using standard substructures, the cladding of existing buildings must be planned by taking into consideration the situation and the details of each individual building:

- additional weight from heavier facades (foundations, etc.)
- nature of the foundation for anchors (pull-tests with plugs may be necessary)
- walls may be uneven or have a strongly segmented structure (see fig. 3).
- defective zones (anchoring in certain areas impossible or too costly)
- with sandwich panels (three-layer construction): does it make sense and can the anchoring be attached to the outer cladding or should it be to the load-bearing layer ?)
- anchoring in the joint zones, corner zones (see fig. 4), etc.

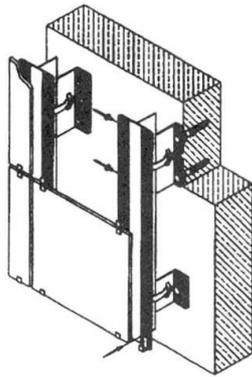


a) Excentric anchoring

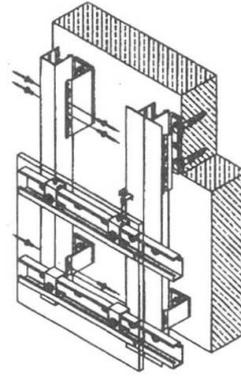


b) Centric anchoring

Fig. 1: Systems with brackets

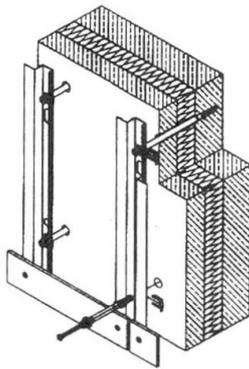

a) Fixing with distance wallplugs

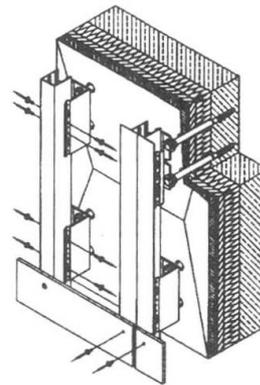

b) Fixing with distance wallplugs and brackets

Fig. 2: Distance systems

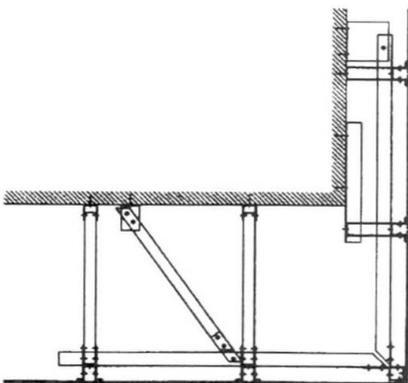


Fig. 3: Example: distance up to 700 mm

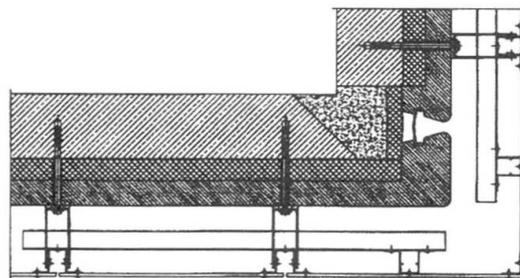


Fig. 4: outer corner WBS 70