

**Zeitschrift:** IABSE reports = Rapports AIPC = IVBH Berichte  
**Band:** 77 (1998)

**Artikel:** Evaluation of resistivity measurement of masonry by numerical simulation  
**Autor:** Van Gemert, Dionys / Venderickx, Kathleen  
**DOI:** <https://doi.org/10.5169/seals-58179>

### **Nutzungsbedingungen**

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

### **Conditions d'utilisation**

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

### **Terms of use**

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

**Download PDF:** 01.04.2026

**ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>**



## Evaluation of Resistivity Measurement of Masonry by Numerical Simulation

**Dionys VAN GEMERT**

Prof. Dr

WTA-International for Restoration

KU Leuven, Belgium

Dionys van Gemert, born 1948, graduated as a civil engineer at KU Leuven in 1971. He obtained his PhD at KU Leuven in 1976. Since 1978 he is member of the academics staff of the Civil Engineering Department of KU Leuven. He is president of WTA-International for Restoration. He is head of the Reyntjens Laboratory for Materials Testing. His research concerns repair and strengthening of constructions and concrete polymer composite.

**Kathleen VENDERICKX**

Dr Eng.

University of Leuven

KU Leuven, Belgium

Kathleen Venderickx, born 1970, received her civil engineering degree from the University of Leuven in 1995. She is a doctoral researcher at KU Leuven, and teaching as assistant of mechanics at the Hogeschool Limburg.

### Summary

Geo-electrical resistivity maps are being used for the evaluation of brick and stone masonry. They provide information about the inhomogeneities and the geometrical boundaries of the structure. Only the information of the inhomogeneities is of interest for the evaluation of the internal condition of the structure. Therefore, the influence of the boundary conditions on the measurements needs to be eliminated. This paper discusses the comparison of laboratory measurements on a well-known physical model consisting of a sandbox of 2.5 m x 2.5 m x 0.35 m with embedded blocs and the results of a numerical model which simulates the measurements. The moisture content of the materials influences the measurements and is taken into consideration. The geometrical boundaries, the moisture content as well as the dimensions and localisation of the inhomogeneities are known characteristics which are used as input of the numerical model.

### 1 Experimental research - physical model

The physical model used in this research consists of an insulated sandbox with embedded blocs (fig 2). The physical model simulates a wall of which the geometrical boundaries, the localisation and dimensions of the inhomogeneities, the electrical properties and the moisture content of the masonry are well known. The inhomogeneities are simulated by insulated cubes with varying dimensions which are burried in the sand at a certain depth. The measurements are done with the electrode configuration of the Wenner-spread (fig 1).

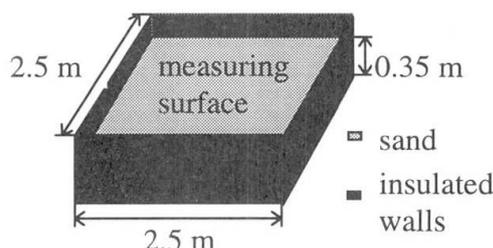
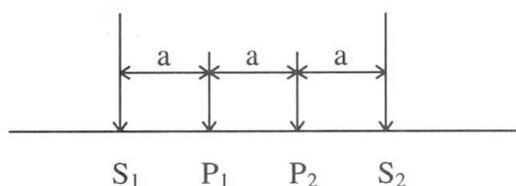


Fig. 1: Electrode configuration of the Wenner spread

Fig. 2: Physical model: insulated sandbox

The material in the model is sand with a moisture content of 5%. Due to gravitational water movements the moisture content of the sand does not remain at 5 % over the whole model, but increases with depth. This means that the resistivity of the sand will decrease with depth. Previous research has shown that the moisture content has a big influence on the resistivity measurements. This influence is determined by taking cores out of the model and measuring the resistivity profile over the core length.

## 2 Simulations

The simulations are made using a finite element model. For the sandbox without inhomogeneities, we only refined the model in the vicinity of the measuring points (fig 3). Submodelling is used for the simulation of the sandbox with a cube placed at the centre.




Fig 3: Finite element model

Some typical results of the measurements and the simulations are given in figure 4.

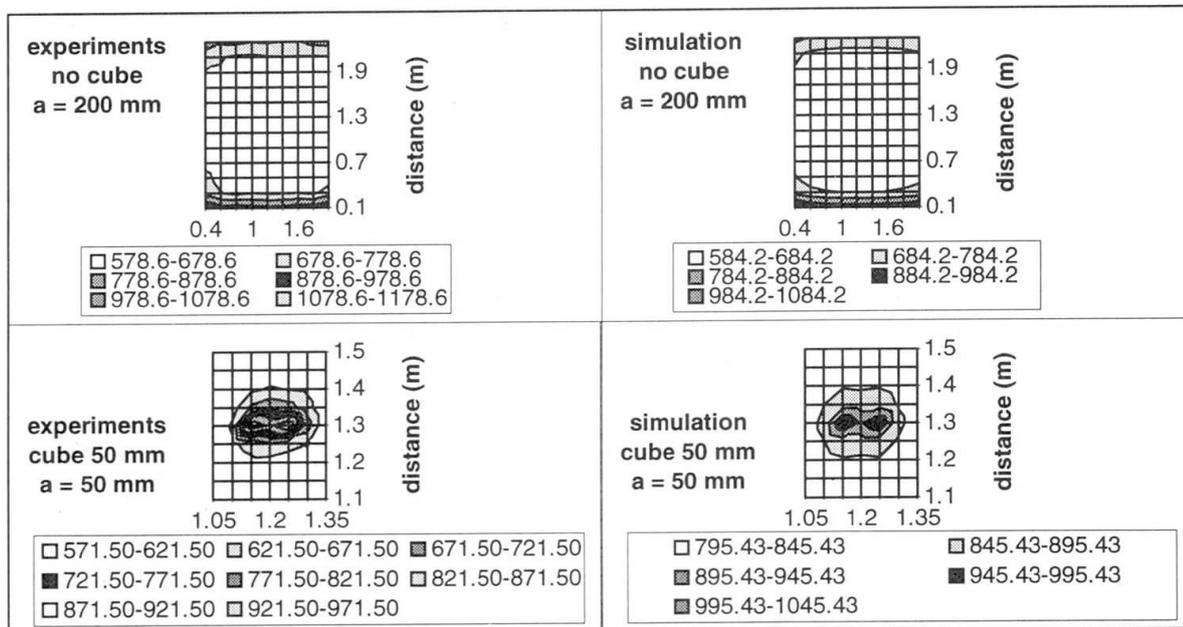


Fig 4: Comparison between experimental research and simulations (values in ohmm)

From this research we may conclude that the numerical model is able to simulate the influence of the geometrical boundaries and the inhomogeneities. It is accurate enough to be used for calibration and filtering of site measurements.