

**Zeitschrift:** IABSE reports = Rapports AIPC = IVBH Berichte

**Band:** 79 (1998)

**Artikel:** Construction of the Kurushima bridge

**Autor:** Kanisawa, Yasuhito / Fujii, Hiroshi / Kawaguchi, Koji

**DOI:** <https://doi.org/10.5169/seals-59838>

### Nutzungsbedingungen

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

### Conditions d'utilisation

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

### Terms of use

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

**Download PDF:** 16.07.2025


**ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>**

## Construction of the Kurushima Bridge



**Yasuhito KANISAWA**  
Gen. Mgr, Third Constr. Bur.  
Honshu Shikoku Bridge Auth.  
Onomichi, Japan

Born in 1944, got his Civil Eng. degree at Tokoku Univ. Since 1996 he has been the Gen. Mgr of the Third Constr. Bureau of H.S.B.A.

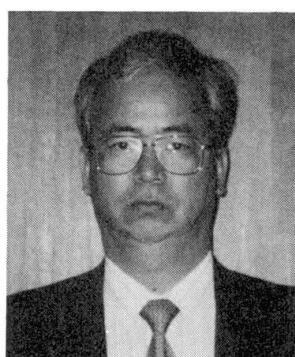

**Hiroshi FUJII**  
Gen. Mgr, Imabari Constr.  
Honshu Shikoku Bridge Auth.  
Imabari, Japan

Born in 1948, got his Civil Eng. degree at Waseda Univ. Since 1997 he has been the Gen. Mgr of the Imabari Constr. Office of H.B.S.A.



**Koji KAWAGUCHI**  
Mgr, Third Constr. Bur.  
Honshu Shikoku Bridge Auth.  
Onomichi, Japan

Born in 1953, got his Civil Eng. degree at Tokyo Institute of Technology. Since 1996 he has been the Mgr, Design Div. of Third Constr. Bureau of H.S.B.A.

### 1. Outline

The Kurushima Bridge, located on the Onomichi-Imabari Route of the Honshu-Shikoku Bridges, is the three connecting suspension bridges across the Kurushima Strait. The Kurushima Strait with its beautiful scenery is designated as one of Japan's national parks. The strait is approx. 4 km wide and divided into three marine traffic routes by the two small islands. Compounding the heavy shipping traffic, the strait is hazardous for its geographical conditions characterized by numerous


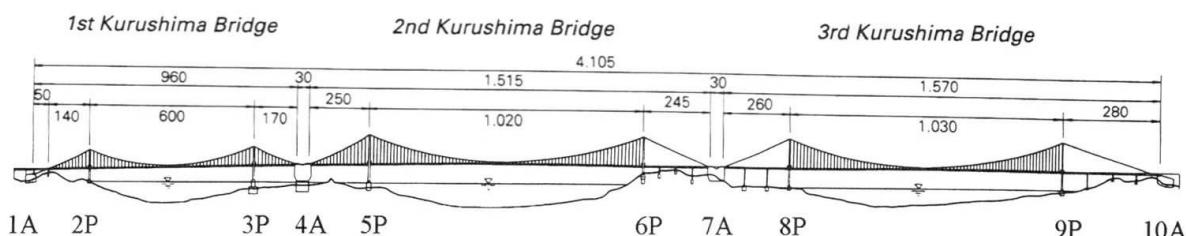



Fig. 1 General view of the Kurushima Bridge

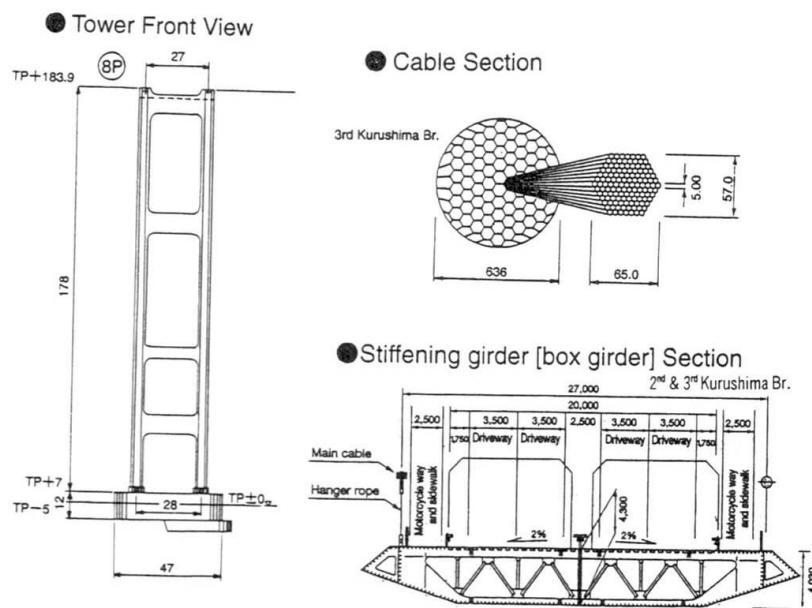


islets and swift tidal current with a maximum velocity of 10 knots. The construction work started in September of 1990 and will be finished in 1999.

## 2. Towers

The tower height is generally determined so that the sag ratio may become optimum in dynamics and economy and the line linking the tower tops may become parallel to the vertical alignment of the girder. However, in the case of this bridges, this manner brings about the discontinuity of the towers' height, because the center span length of 1st bridge is shorter than that of 2<sup>nd</sup> and 3<sup>rd</sup> bridge. Therefore, the special consideration was paid for aesthetics and the towers' heights were determined in the manner of continuous variation through the comparative study.

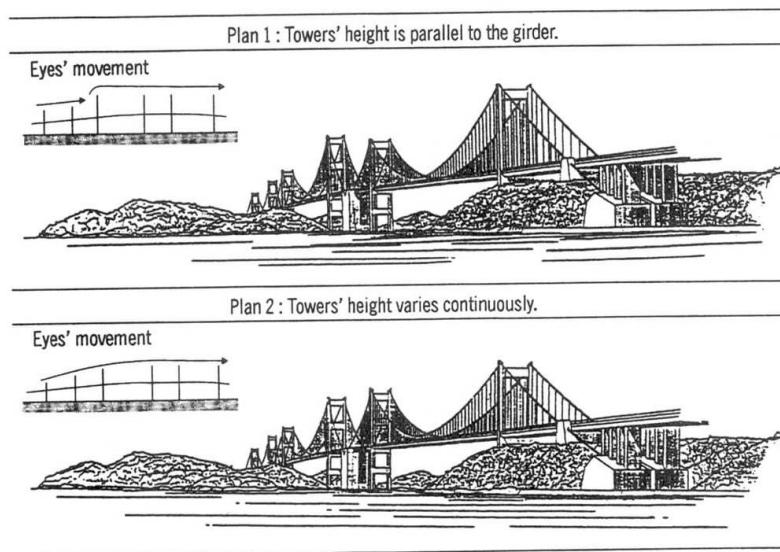

*Fig.2 Comparison of looks in different tower heights*

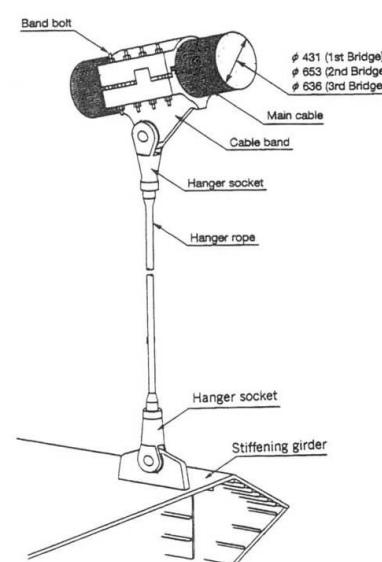


*Fig.3 Hanger rope fixing structure*

## 3. Cables

Cables are wired with the prefabricated-strand method. Every strand is comprised of 127 recently developed high-strength steel galvanized wires of 180 kgf/mm<sup>2</sup> which were also adopted for the Akashi Kaikyo Bridge. Each hanger rope is a bundle of 5 mm-diameter galvanized steel wires of high-strength grade arranged in parallel. The rope surface is covered with polyethylene for corrosion protection of the hanger rope, to which fluorocarbon resin coating is further applied for coloring. The hanger rope is connected both to the main cable and the girder with pin.

## 4. Girders

Stiffening girder is erected by the perpendicular hanger method. A prefabricated-at-factory girder blocks on a barge is placed under the perpendicular location of the erection firstly, and it is lifted to fix to the hangers by the lifting machine on the cables. In order to stand the strong tidal current, a sailing barge, was originally developed to secure a certain position without mooring any anchor.

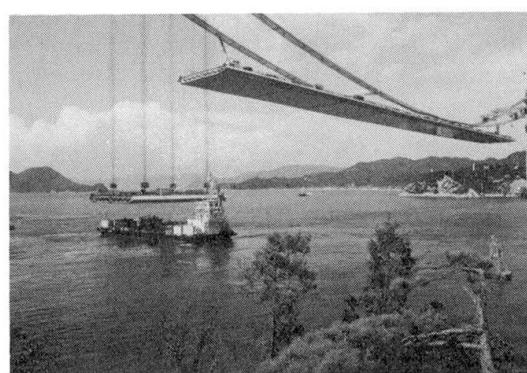

*Fig.4 View of the girder erection*