

**Zeitschrift:** IABSE reports = Rapports AIPC = IVBH Berichte  
**Band:** 79 (1998)

**Artikel:** Prestressed concrete bridge with tendons of large eccentricities  
**Autor:** Yamazaki, Jun / Ido, Kosei / Kono, Hiroki  
**DOI:** <https://doi.org/10.5169/seals-59857>

#### **Nutzungsbedingungen**

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

#### **Conditions d'utilisation**

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

#### **Terms of use**

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

**Download PDF:** 16.01.2026

**ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>**

## Prestressed Concrete Bridge with Tendons of Large Eccentricities

**Jun YAMAZAKI**  
Professor  
Nihon Univ.  
Tokyo, Japan

Born in 1942, received his degrees at Univ. of Tokyo and Univ. of Washington.

**Kosei IDO**  
Graduate Student  
Nihon Univ.  
Tokyo, Japan

Born in 1973, graduate from Nihon Univ., College of Science and Technology.

**Hiroki KONO**  
Graduate Student  
Nihon Univ.  
Tokyo, Japan

Born in 1973, graduate from Nihon Univ., College of Science and Technology.

### Summary

A model favorable in structural behavior and ease of construction was created based on a design rationale selected for prestressed concrete (PC) girder bridge with external tendon of large eccentricity. For a self anchored suspension PC bridge, possible minimum values were derived for girder depth, area, section modulus, tendon sag and prestressing force. For this type of structure a span length of about 180 m was found to be favorable. A finite deflection analysis suggested that ultimate state of 1.7 times (Dead load+ Live load) is not attained for span lengths larger than 180 m. Load test results for reduced scale specimen were satisfactory for preliminary plans and tests are being continued.

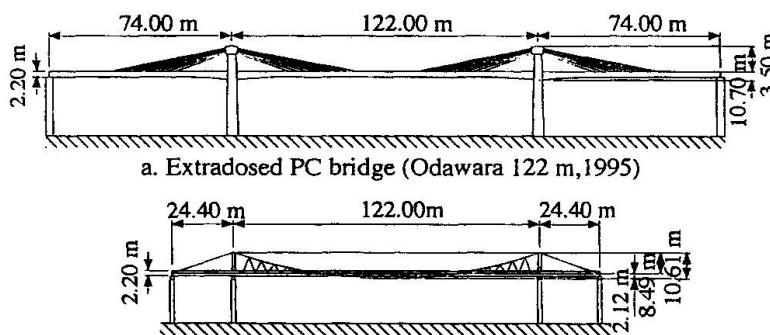


Fig.1 Prestressed concrete (PC) bridges with tendons of large eccentricity

### 1. Proportioning the structure for service load

A model chosen was mono-cable self-anchored PC suspension bridge (Fig.1,b). For an assumed live load of  $4 \text{ kN/m}^2$ , requirements set for proportioning were; (1) deflection due to live load is  $1/1000$  of span, (2) maximum fiber stress in concrete beam under extreme moments is  $10 \text{ MPa}$ , (3) ultimate tendon strength is  $1900 \text{ MPa}$ . In a simplified response model the assumptions were;

(1) cable profile shape is parabola and remains as parabola after deflection, (2) cable and beam deflection is same at span center only and compatibility is ignored elsewhere, (3) and thus the beam is loaded downward by uniform design load and upward by uniform load from cable.

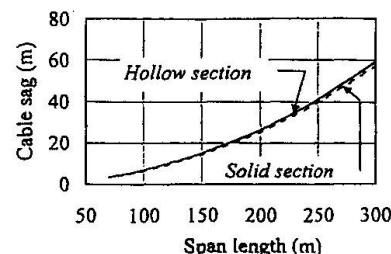


Fig.4 Cable sag

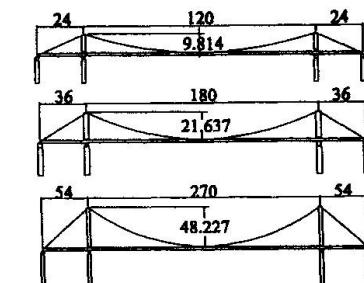


Fig.2 Structure profile shapes derived by stated rationale for varying span lengths

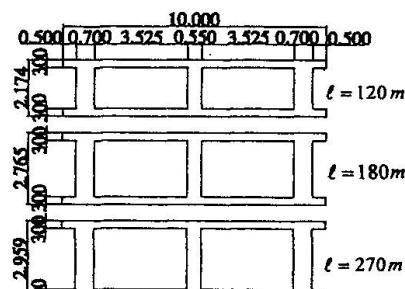


Fig.3 Cross section shapes

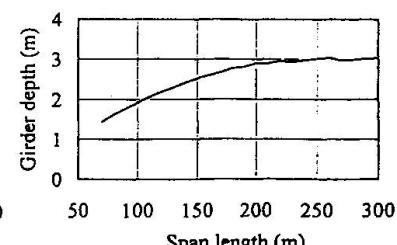


Fig.5 Girder depth



## 2. Structural characteristic obtained

In view of results shown in Figs.2 through 7, a proportion for a span length of 180m is found to be favorable in terms of response to service load and construction method. A stress increase due to live load in tendon was 7% of initial tension (Fig.6). Tendon is composed of 335 of 15.2mm strands and initial tension is 51,100kN (0.6 times the ultimate). A girder depth of 2.765m (Fig.3) and a height of deviator tower of 21.6m (Fig.2, span-sag ratio is 8.32) are favorable for current state of practice of construction method.

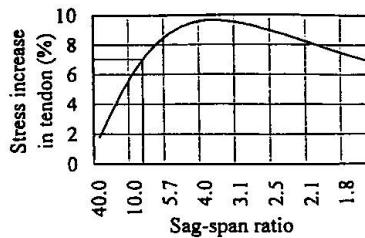


Fig.6 Stress increase in cable due to live load

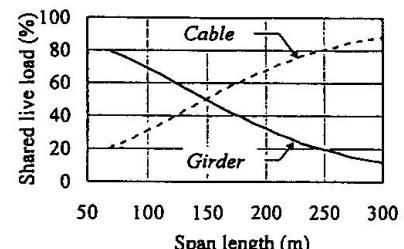


Fig.7 Load shared by girder and cable

## 3. Finite deflection analysis for ultimate

An assumption of load sharing between cable and beam is same as stated before in Section 1.

An analysis model is as shown in Fig.8. Load carrying capacity of the beam is reduced by axial force component of prestress as deflection increases. However, ultimate strength of 1.7 times (D+L) is attained for span length of 180m as seen in Fig.9.

## 4. Load testing model

Similitude of 1/24 scale model (Fig.10) was true for sag-span ratio and girder depth, but it was violated for girder cross section area and section modulus (by factors not exceeding 2) and prestress. For elastic range of tendon, response to load was satisfactory to prediction including deflection (Fig.11) for preliminary stage of test plan.

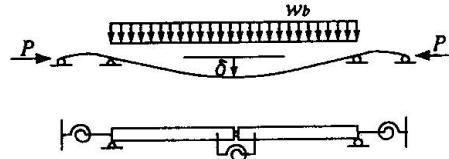


Fig.8 Mechanics model for deflection analysis

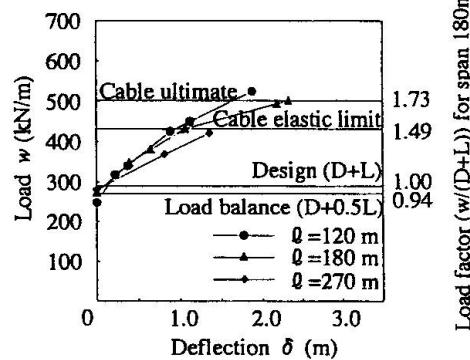


Fig.9 Load vs deflection by finite deflection analysis

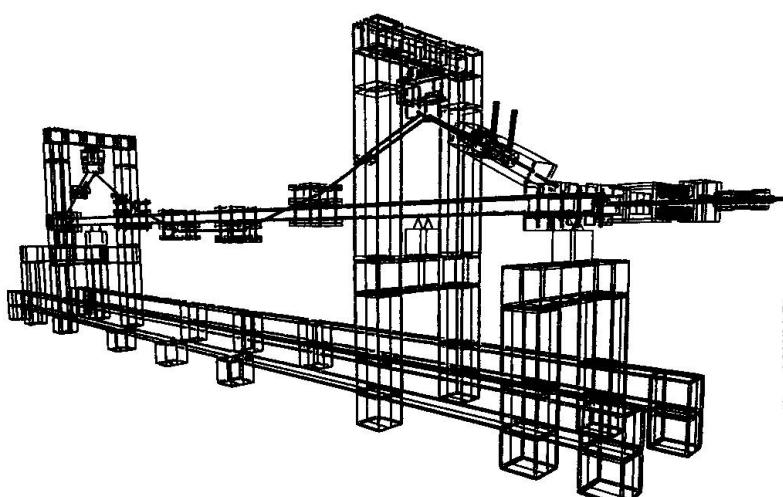


Fig.10 Scheme of load test apparatus (scale 1: 24)

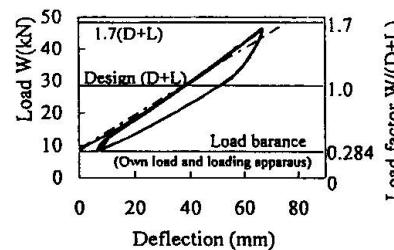


Fig.11 Load vs deflection