

**Zeitschrift:** IABSE reports = Rapports AIPC = IVBH Berichte  
**Band:** 79 (1998)

**Artikel:** Super long-span bridge with 2-box and 1-box combined girder  
**Autor:** Ogawa, Kazushi / Shimodoi, Hideki / Nogami, Chiaki  
**DOI:** <https://doi.org/10.5169/seals-59931>

### **Nutzungsbedingungen**

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

### **Conditions d'utilisation**

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

### **Terms of use**

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

**Download PDF:** 01.04.2026

**ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>**

## Super Long-Span Bridge with 2-Box and 1-Box Combined Girder

**Kazushi OGAWA**  
Senior Mgr, Bridge Eng. Dept  
Kawasaki Heavy Ind. Ltd  
Akashi, Hyogo, Japan

**Hideki SHIMODOI**  
Mgr, Bridge Eng. Dept  
Kawasaki Heavy Ind. Ltd  
Akashi, Hyogo, Japan

**Chiaki NOGAMI**  
Eng., Bridge Eng. Dept  
Kawasaki Heavy Ind. Ltd  
Akashi, Hyogo, Japan

### Summary

In the super-long span suspension bridge, it becomes serious how to make the bridge aerodynamically stable in economical ways. This paper investigates application of the 2-box and 1-box combined girder to the super-long span suspension bridge, in which the 1-box girder is used at the tower part and the 2-box girder at the other part. The 2-box girder opened between boxes improves aerodynamic stability and the 1-box girder prevents the deck width from increasing the space of pylon. In the study the newly developed suspension bridge with the 2-box and 1-box combined girder shows better aerodynamic characteristics on flutter than the usual suspension bridge with the 1-box girder.

### 1. Description of super-long span bridge with 2-box/1-box combined girder

A conceptual view of the newly developed suspension bridge having a main span of 2,500m is shown in Fig.1. Areas of the 1-box girder and the 2-box girder are indicated in Fig.2. Cross sections of 1-box girder and 2-box girder are shown in Fig.3. The space between cables is 7m, adjusted to the open width of the 2-box girder. Hangers suspend the 1-box girder obliquely and the 2-box girder vertically. The total mass of the girder and cables in the 2-box/1-box combined girder is 37.9t/m, which is only 1.1 times heavier than that in the 1-box girder. According to the dynamic analyses of the super-long span bridge with the three dimensional finite element method, the 17th mode corresponds to the 1st torsional vibration, in which torsional displacement prevails. The 1st torsional frequency is 0.155Hz.

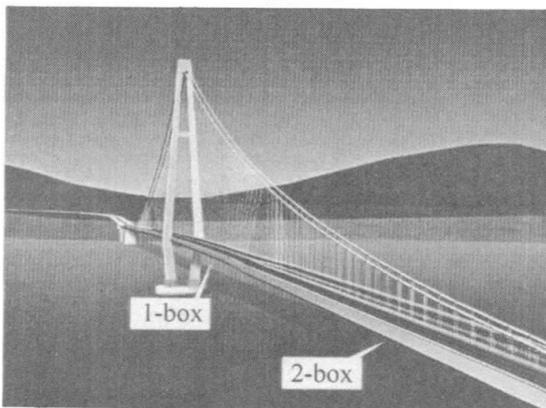


Fig. 1 Image of super-long span bridge

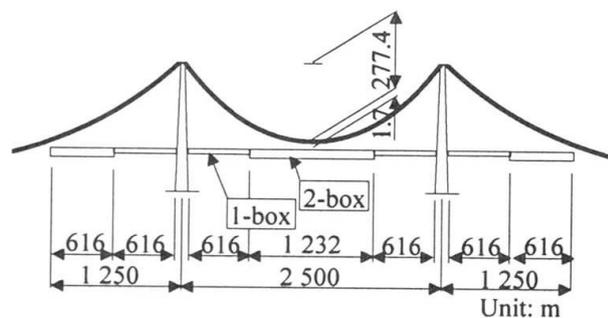


Fig. 2 Areas of 2-box girder and 1-box girder



## 2. Aerodynamic characteristics of super-long span bridges

Distortion of the super-long span suspension bridge in wind was analyzed with the large deformation finite element method. Fig.4 shows torsional displacement of the girder at the center of the main span due to wind forces. In the original 2-box and 1-box combined girder, unbearable large torsional displacement is induced in the high wind velocity of over 70m/s. Using the modified section in the 2-box girder to abbreviate pitching moment of the steady aerodynamic force on the girder, torsional displacement can be decreased less than that of the suspension bridge with the 1-box girder only.

The flutter phenomena on the bridge were analyzed with the multi-mode flutter analyses, considering the first 30 modes. The aerodynamic forces on the girder were induced from the wind tunnel test with the two dimensional deck model. Fig.5 shows results of flutter analyses on the super-long span suspension bridge at the wind attack angle of 0°. The flutter velocity in the 2-box/1-box combined girder, 67m/s, is higher than that in the 1-box girder, 50m/s. Applying the modified section to the 2-box girder, it can be improved to 80m/s. If torsional displacement of the girder due to wind is considered in the flutter analyses, the flutter velocity can be estimated at 90m/s. Thus combination of the 2-box girder and 1-box girder can improve flutter stability of the super-long span suspension bridge notably.

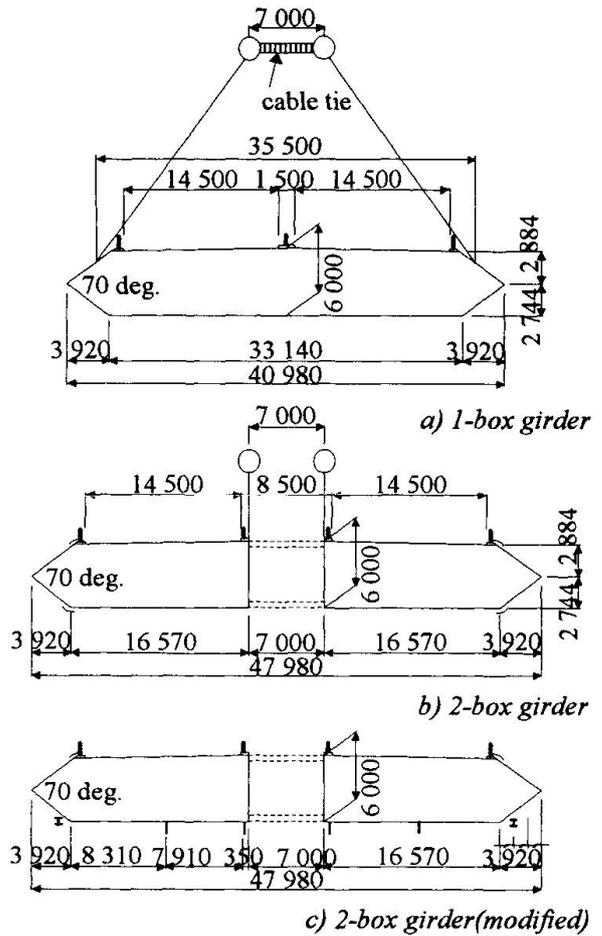


Fig. 3 Stiffening girder section

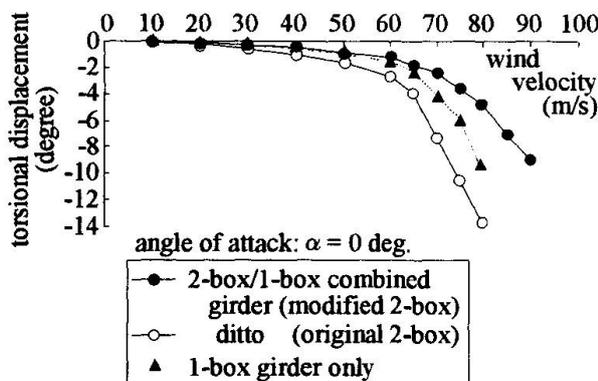


Fig. 4 Torsional displacement of girder due to wind forces

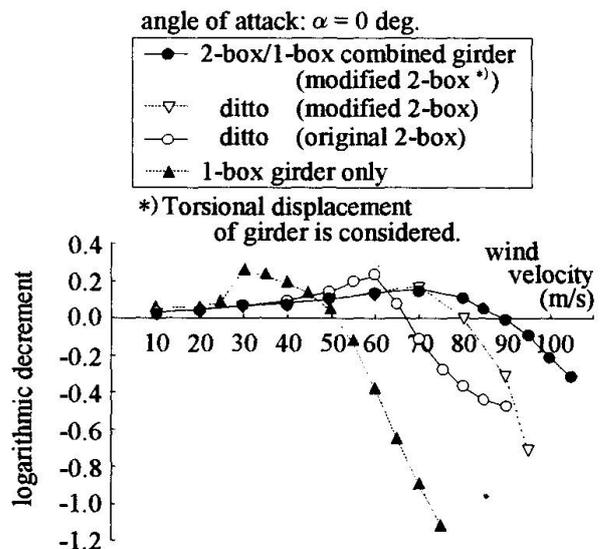


Fig. 5 Flutter response of super-long span bridges