

**Zeitschrift:** IABSE reports = Rapports AIPC = IVBH Berichte  
**Band:** 79 (1998)

**Artikel:** Performance of framed-tube structures under vertical forces  
**Autor:** Bose, Bishwanath  
**DOI:** <https://doi.org/10.5169/seals-59950>

#### Nutzungsbedingungen

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

#### Conditions d'utilisation

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

#### Terms of use

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

**Download PDF:** 26.07.2025

**ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>**

## Performance of Framed-Tube Structures under Vertical Forces

**Bishwanath BOSE**  
Lecturer  
Univ. of Abertay Dundee  
Dundee, Scotland, UK



Bishwanath Bose, born 1939, received his civil engineering degree from Patna Univ., India in 1960 and PhD from the Univ. of Strathclyde, Scotland in 1976. He is currently a lecturer at the Univ. of Abertay Dundee, Scotland.

### Summary

This paper reports the summary of a simplified analysis of framed-tube structures subjected to vertical forces.

### 1. Introduction

The framed-tube structure consists of a closely spaced exterior columns tied at each floor level by spandrel beams to produce a system of four orthogonal rigidly jointed frame panels forming a rectangular tube system (see fig 1(a)). The most significant framed-tube structure are the 110-storey twin towers for the World Trade Centre in New York, USA. The analysis of framed-tube structures supported on rigid and elastic bases and subjected to lateral wind load were considered in two papers<sup>1,2</sup>. By replacing the discrete structure by an equivalent orthotropic tube (see fig 1(b)), and making simplifying assumptions regarding the stress distribution in the substitute structure simple closed solutions were obtained. In addition to the lateral load, the framed-tube structure is subjected to vertical forces due to the dead load of the structure and the imposed load acting on the floor areas.

### 2. Method of analysis


Detailed analysis of a framed-tube structure of rectangular cross-section, subjected to vertical forces, is given in Reference 3. In this paper a framed-tube of square section, of side  $2b$ , is considered (see fig 2). The vertical force caused due to the weight of the structure itself may be considered as a uniform force  $\rho_s$  per unit volume of the equivalent tube structure. The weight of the floor system and the imposed load acting on the floor areas are transferred equally to the four panels at every floor level, which for the panel AD may be expressed as

$$\rho = \rho_f \left[ 1 - \left( \frac{y}{b} \right)^2 \right] \quad (1)$$


where  $\rho_f$  is a constant term independent of the height coordinate  $z$ .

The simplest approximation which may be made for the symmetrical distribution of vertical stress  $\sigma_z$  in the panel AD may be expressed as

$$\sigma_z = f_1 + \left( \frac{y}{b} \right)^2 f_2 \quad (2)$$

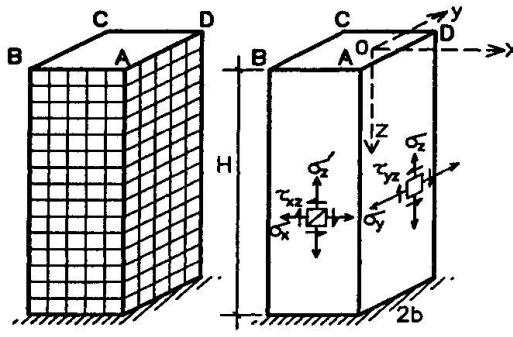

(a)   
 Fig 1 Framed tube (a) real and  
(b) substitute structure

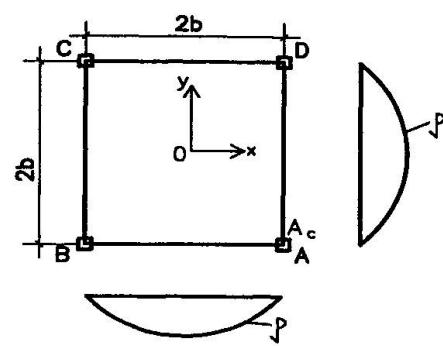

(c)   
 Fig 2 Vertical forces  
 due to floor load

in which  $f_1$  and  $f_2$  are functions of the height coordinate  $z$  only.

By considering the condition of vertical force equilibrium at any level  $z$  the function  $f_1$  is given as

$$f_1 = -\frac{W}{A} - \frac{3n+2}{3(n+2)} f_2 \quad (3)$$

in which  $W$  is the total vertical force at that level, given by

$$W = 4tz \left[ \frac{4}{3} bp_f + \left( 2b + \frac{Ac}{t} \right) p_s \right] \quad (4)$$

$n = A_c/bt$ ,  $A$  is the area of the equivalent tube section, given by  $A = 8bt + 4 A_c$ ,  $t$  is the thickness of the equivalent tube and  $A_c$  is the area of the corner column.

By applying the laws of equilibrium and the principle of least work the function  $f_2$  is determined as

$$f_2 = \frac{\rho_f \sinh m_2 H \xi}{m_2 \cosh m_2 H} \quad (5)$$

in which  $m_2$  is constant and  $\xi = z/H$ .

The distribution of vertical stress in each panel may be expressed as

$$\sigma_z = -\frac{W}{A} - \left[ \frac{3n+2}{3(n+2)} - \left( \frac{y}{b} \right)^2 \right] f_2 \quad (6)$$

The normal stress  $\sigma_y (= \sigma_x)$  and shear stress  $\tau_{yz} (= \tau_{xz})$  may also be found. The results from the substitute continuum system must then be transferred into the real discrete structure to give shears, and thus moments, and axial forces in beams and columns.

## References

1. Coull, A and Bose, B. Simplified analysis of frame-tube structures. Journal of the Structural Division, ASCE, November 1975, 2223-2240.
2. Bose, B. Analysis of framed-tube structures supported on elastic base. Proceedings of the 2nd International Conference on high-rise buildings, Nanjing, China, March 1992, 69-74.
3. Bose, B. Analysis of framed-tube structures for high-rise buildings. PhD thesis, University of Strathclyde, Glasgow, 1976.