

**Zeitschrift:** IABSE reports = Rapports AIPC = IVBH Berichte  
**Band:** 82 (1999)  
  
**Artikel:** Aerodynamic performance of cable-supported bridges with large span-to-width ratios  
**Autor:** Larsen, Søren V.  
**DOI:** <https://doi.org/10.5169/seals-62132>

### **Nutzungsbedingungen**

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

### **Conditions d'utilisation**

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

### **Terms of use**

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

**Download PDF:** 10.12.2025

**ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>**



## Aerodynamic Performance of Cable-Supported Bridges with Large Span-to-Width Ratios

**Søren V. LARSEN.**  
Dr. Eng.  
Danish Maritime Inst.  
Lyngby Denmark



Søren V. Larsen, born 1966, obtained his degree in 1991, and his Ph.D. in 1997. He joined DMI in 1995. Project Manager, Hydro- and Aerodynamics

### Abstract

Laterally slender bridges seem to be an area which until now has not had very much attention. Therefore, it has been found valuable to carry out a comprehensive study of an important topic related to such bridge structures: the aerodynamic characteristics of long and narrow cable supported bridges.

A primary concern is the study of a proposed spatial cable-stayed bridge, or spatial system, that consists of four inclined cable planes which enable both vertical, lateral and torsional support of the girder. Two bridges of a conventional design are included for comparison. These are a suspension bridge and a cable-stayed bridge of the modified fan type with two parallel cable planes. Such conventional systems offer only vertical and torsional support. However, the suspension bridge is to some extent able to support the bridge deck in lateral direction due to the so-called pendulum effect. The support of the bridge deck in lateral direction becomes increasingly important with increased ratio between the length of the main span and the width of the stiffening girder, the span-to-width ratio.

The three cable supported bridges comprised in the study have an extreme span-to-width ratio of 100, which is almost twice of what is seen in cable supported bridges today. However, both cable-stayed and suspension bridges are being erected with larger and larger span-to-width ratios. The three types are illustrated on the enclosed figure. All bridges chosen for the study have a main span of 800 m and two side spans of 250 m


Two cross-sections of the bridge deck have been studied, namely a streamlined and a bluff section. An extensive test programme was carried out with aeroelastic full bridge models of the three structural systems. The primary concern of the full bridge model tests was determination of stability limits and measurement of buffeting response.

As expected, the spatial system constitutes a promising system due to a significantly smaller lateral response. In the erection stage, the spatial system eliminates the problems of a conventional cable-stayed bridge with excessive lateral deflections. Even mounted with an aerodynamic "unfortunate" bluff section, the spatial system was well-behaved. The observed instabilities of the conventional bridges were one degree of freedom instability (torsional) and there was no coupling of the instability with the lateral degree of freedom.

It is concluded that the proposed spatial cable-stayed bridge in terms of aerodynamic behaviour appears to be very advantageous, especially with a slender girder which can cause problems for




conventional cable supported systems.  
The three bridges are illustrated in Figure 1.

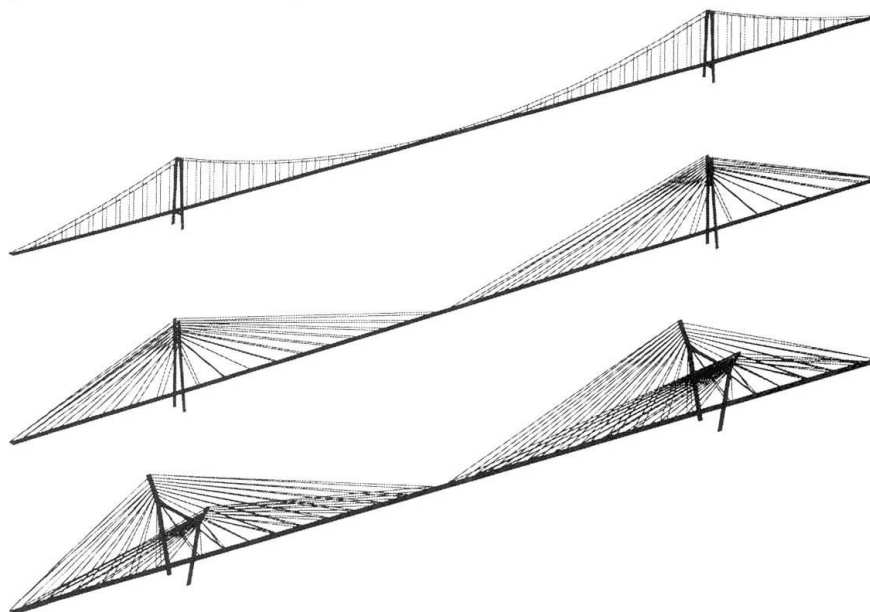


*Figure 1 Illustrations of the three cable-supported bridges studied. Upper: suspension bridge, middle: plane (or traditional) cable-stayed bridge, lower: spatial cable-stayed bridge.*


Figures 2 through 4 show photographs of the full bridge models installed in DMI's very wide boundary layer wind-tunnel.

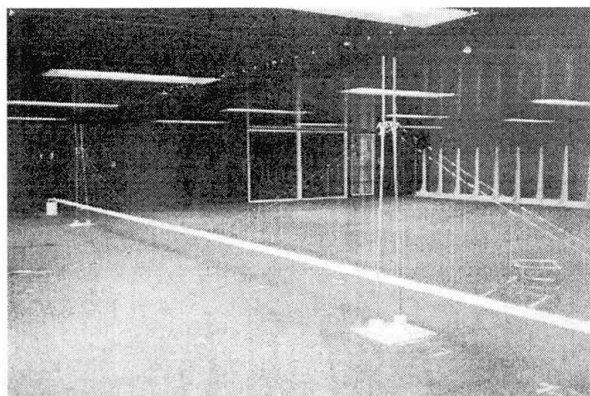

*Figure 2 Suspension Bridge Model*

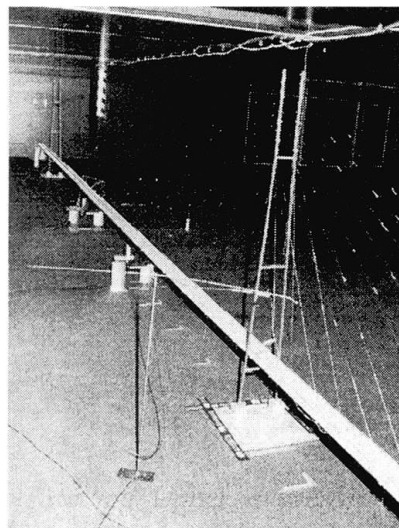

*Figure 3 Plane Cable-Stayed Bridge Model*

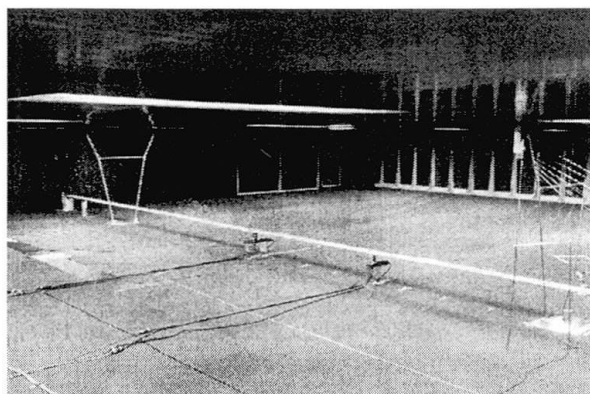

*Figure 4 Spatial Cable-Stayed Bridge Model*