

**Zeitschrift:** IABSE reports = Rapports AIPC = IVBH Berichte  
**Band:** 82 (1999)

**Artikel:** The lifting, transport and placing of the Øresund pylon caissons  
**Autor:** Trenkler, Ferdinand / Skrikerud, Petter / Voll, Dan M.  
**DOI:** <https://doi.org/10.5169/seals-62135>

#### **Nutzungsbedingungen**

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

#### **Conditions d'utilisation**

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

#### **Terms of use**

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

**Download PDF:** 06.02.2026

**ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>**



## The Lifting, Transport and Placing of the Øresund Pylon Caissons

**Ferdinand TRENKLER**  
Civil Engineer  
VSL (Switzerland) Ltd.  
Lyssach, Switzerland

Ferdi Trenkler, born 1941, received his civil engineering degree in 1966 from the Swiss Federal Institute of Technology. Since 1977, he has worked with VSL (Switzerland) Ltd. Presently he is Chief Engineer with Heavy Lifting, one of VSL's worldwide activities.

**Dr. Petter SKRIKERUD**  
Civil Engineer  
Structural Engineering AS  
Lysaker, Norway



Petter Skrikerud, born 1947, received his civil engineering degree in 1970, and the Ph.D. degree in 1982, from the Swiss Federal Institute of Technology. He is presently senior partner of Structural Engineering AS, and is mainly engaged with projects for the offshore oil industry.

**Capt. Dan M. VOLL**  
Master Mariner  
Neptun AS  
Stavanger, Norway

Dan Magne Voll, born 1952, seaman experience since 1968, received his Master Mariner degree in 1974. His experience encompasses master of various marine operations with command of several vessels and equipment. He is presently tow master / salvage master and is involved in offshore oil industry projects.

### Abstract

The two 204 metre tall main pylons of the cable stayed, central part of the Øresund bridge rest on concrete caisson foundations. Each caisson has plan dimensions of 35 by 37 metres, is 22.5/21 metres high and has a dry weight of about 20'000 tonnes. The two caissons were prefabricated in the Kockums dry dock in Malmö. They were prestressed in all three directions. The anchor heads of the vertical prestressing cables were used as attachment points for the lifting tendons.

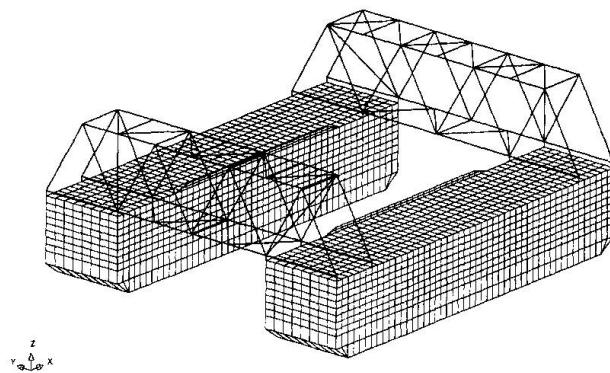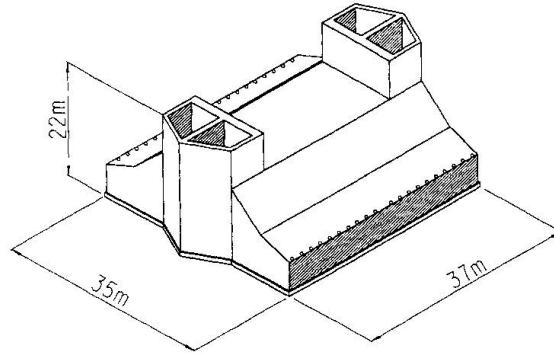

The transportation of the caissons from the dry dock to their permanent location in Øresund was achieved by means of a purpose built and equipped catamaran. The same consisted of the two existing Neptun barges Goliat 18 and Goliat 19, suitably strengthened, connected with two space truss structures (one fore and one aft), and equipped with VSL hydraulic strand lifting/lowering equipment. The design lifting weight of the partly submerged caisson was 12'200 tonnes.


Following were the main steps of the two LTP (Lifting-Transport-Placing) operations:

- After flooding the dock, entering the catamaran into the dock and positioning with the first caisson between the two barges



- Connection of the strand tendons of the lifting equipment to the post-tensioning anchor heads of the caisson by means of screw type couplers
- Lifting of the caisson until achieving the same draught of both catamaran and caisson (6.4 m)
- 110% load test by temporary lifting the caisson a further 1 metre out of water (reduced buoyancy)
- Seafastening of the caisson in horizontal direction by means of shimming towards surge and sway stoppers attached to the barge side shells
- Mechanical locking of the lifting tendons for the sea transportation
- Manoeuvring of the loaded catamaran out of the dock and out of the Malmö harbour
- Towing to installation site using 5 tugs, three in front and two aft, navigating the extraordinary load over the 12 kilometres distance using satellite based system (GPS)
- At the installation site coupling of the catamaran to a pre-laid and pre-tested 8-legged mooring system consisting of anchors and chains
- Positioning of the catamaran with winches and mooring cables
- Using the satellite navigation system (GPS) to satisfy the tight placement tolerances ( $\pm 75$  mm)
- Lowering of the caisson by 12 meters onto pre-installed foundation pads on rock, 10 meters below sea bed, while simultaneously filling the catamaran with ballast water. Touch-down weight about 3.000 tonnes
- After touch-down, immediately slackening of the lifting tendons by combination of pay-out several strokes of the hydraulic jacks and ballasting of catamaran
- Uncoupling of the lifting tendons by divers
- Return of the catamaran to the dry dock to repeat the same operational steps for the second caisson

The LTP operations as described were successfully completed during April 1997. The achieved placement accuracy was 42 mm for the first (west) and 24 mm for the second (east) caisson.

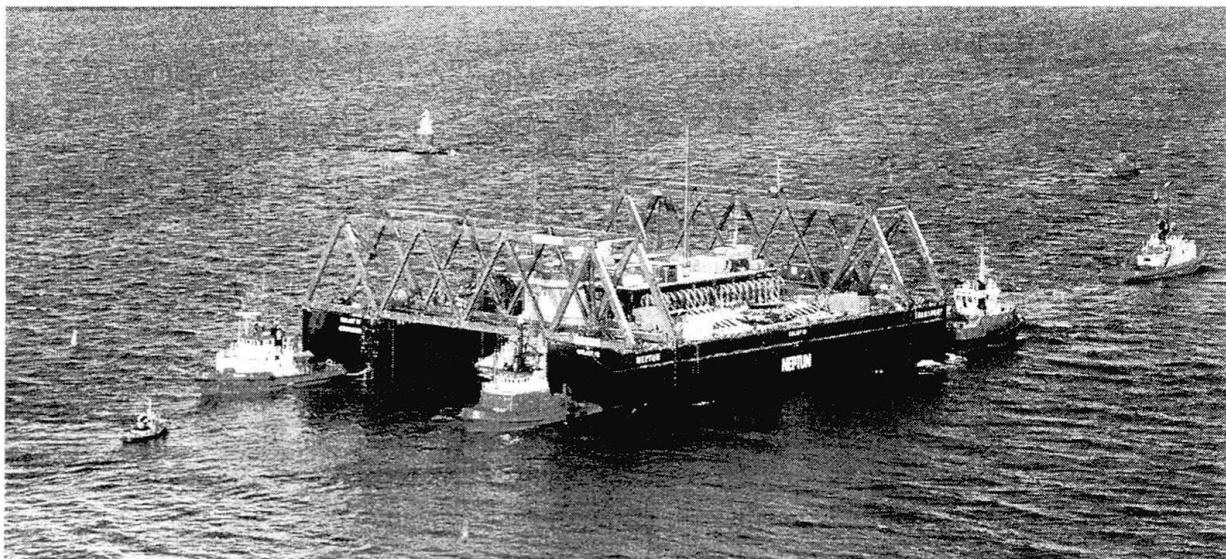

*West Caisson during Towing*