

**Zeitschrift:** IABSE reports = Rapports AIPC = IVBH Berichte  
**Band:** 82 (1999)

**Artikel:** The development of composite cable-stayed bridges  
**Autor:** Svensson, Holger S.  
**DOI:** <https://doi.org/10.5169/seals-62143>

### **Nutzungsbedingungen**

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

### **Conditions d'utilisation**

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

### **Terms of use**

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

**Download PDF:** 16.03.2026

**ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>**



## The Development of Composite Cable-Stayed Bridges

**Holger S. SVENSSON,**  
 Managing Director  
 Leonhardt, Andrä und Partner  
 Stuttgart, Germany



Holger Svensson, born 1945  
 received his Diplom-Ingenieur  
 (M.Sc.) degree in 1969.

He specialised in all aspects of  
 the design and construction of  
 long-span, mainly cable-stayed  
 bridges all over the world.

### Abstract

The first modern cable-stayed bridge was built in Sweden at Strömsund in 1955 with a composite beam.

Since the 80's composite cable-stayed bridges have dominated over all-concrete and all-steel ones. The main reasons are economy in materials and ease of construction. By using concrete rather than steel in compression and by using a concrete slab rather than an orthotropic deck, substantial savings against all-steel bridges are realised.

The construction of a composite beam can use small parts – main girders, cross girders, precast slabs – which can easily be lifted. They can simply be joined by bolting or welding the steel girders and by connecting the precast slabs with cast-in-place joints. Thus smaller lifting equipment and the absence of match-cast joints together with savings in cable steel favour composite beams against all-concrete ones.

In order to distinguish the different types of composite beams we split them into four groups:

- Composite main girders have a concrete roadway slab on top of a steel grid or beam (31 examples)
- A steel (or composite) beam in the centre spans is combined with concrete side spans (8 examples)
- Composite cross girders comprise a beam with concrete main girders and concrete floor slab supported by steel cross girders (2 examples)
- Composite roadway slabs are orthotropic steel decks stiffened by a substantial layer of concrete (3 examples)

Composite bridges are currently not only numerous, but they are the last 3 record span holders: the Yang Pu Bridge in Shanghai with 602 m in 1993, the Normandy Bridge in France with 856 m since 1995 and the Tataru Bridge in Japan in 1999 with 890 m. Important double deck composite bridges are the Kap Shui Mun Bridge in Hong Kong and the Öresund Bridge between Sweden and Denmark, see Figure 1.

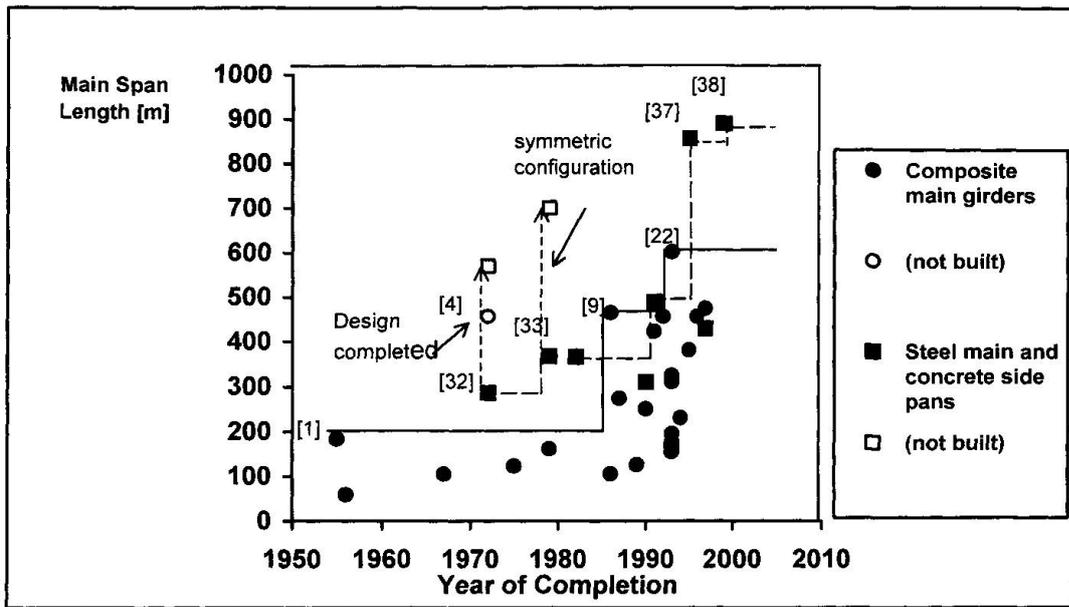


Figure 1. Development of span lengths, from Tables 1 and 2

Composite beams are most economic for main spans between about 350 m to 600 m, concrete approach bridges with a steel (or composite) main span govern between 650 m to 1000 m, see Figure 2.

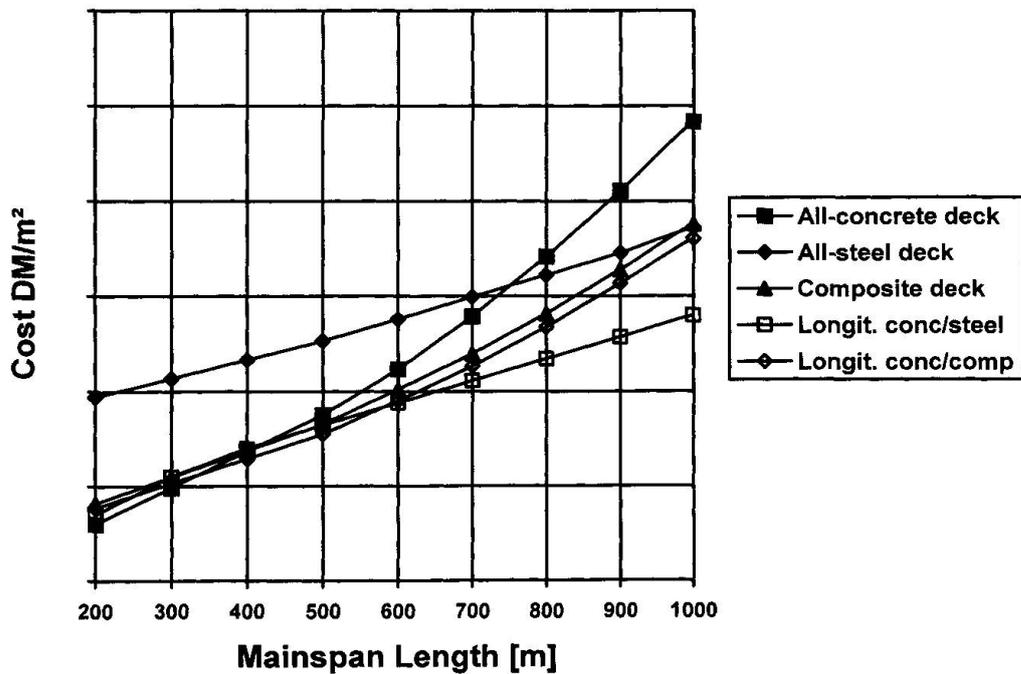


Figure 2. Unit costs for different types of cable-stayed bridges