

Zeitschrift: IABSE reports = Rapports AIPC = IVBH Berichte
Band: 82 (1999)

Artikel: Comparison of slab participation: assumed for design vs. FEA
Autor: Byers, David D. / Hague, Steven T. / McCabe, Steven L.
DOI: <https://doi.org/10.5169/seals-62144>

Nutzungsbedingungen

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

Conditions d'utilisation

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

Terms of use

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

Download PDF: 05.08.2025

ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>



Comparison of Slab Participation: Assumed for Design vs. FEA

David D. BYERS
Project Engineer,
HNTB Corporation
Kansas City, MO, USA

Steven T. HAGUE
Project Engineer,
HNTB Corporation
Kansas City, MO, USA

Steven L. McCABE
Professor
The University of Kansas,
Lawrence, KS, USA

David M. ROGOWSKI
Manager, Highway Bridge Design
HNTB Corporation
Kansas City, MO, USA

Abstract

Bridge design has developed through the centuries in a fashion that continues to improve upon the types of materials being used, as well as to use existing materials in a more efficient manner. Thus, as new materials, analysis methods, design concepts and construction methods are developed, they are frequently employed in bridges because of society's need for longer, more durable spans that can be built within ever-tightening public budgets. However, with new technologies such as the cable-stayed bridge, the rush to implement the concept frequently does not permit the answering of all the important engineering questions prior to implementation. To date, no information has been recorded in the literature that sheds light on the actual longitudinal stress distribution in the concrete deck portion of any of the composite steel and concrete cable-stayed bridges that have been constructed. Without this information, determining the extent to which the concrete deck is participating in the resistance of external force is unknown.

The use of Finite Element Methods (FEM) for design in civil-structural applications has been slow in evolving, primarily due to the cost associated with engineering design time and the general simplicity of most of the models encountered. In addition, proper modeling of structures as large as a typical cable-stayed bridge structure requires modern software to be pushed to its maximum capacity for operation. Consequently, modeling of structures of this nature for design is generally performed using a two-dimensional (2-D) or three-dimensional (3-D) direct stiffness model, making use of three degree of freedom (DOF) or six DOF nodes respectively. Cable-stayed bridge design is no exception and makes almost exclusive use of these less complex, direct stiffness analysis methods.

Results of a study in slab participation and resulting stress distribution in the concrete deck of composite cable-stayed bridge systems are presented. Analytical models developed using the ANSYS[®] finite element analysis package have been investigated for typical span arrangements, similar to those being designed and constructed in the United States. Particular attention is given to the longitudinal stress distribution across the deck section and the resulting effective slab width. Recommendations for the implementation of a *modified effective slab width* procedure, shown in Fig. A-1, are referenced.

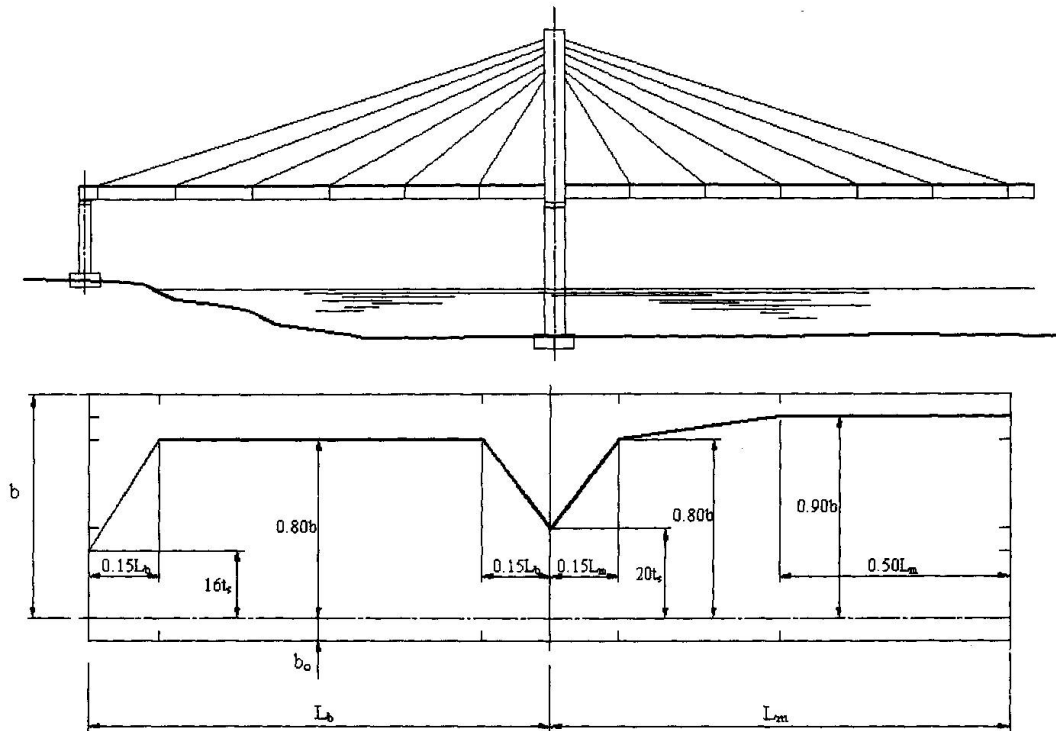


Figure A-1 Proposed Modified Effective Slab Width

Finally, a full scale model of a cable-stayed structure, similar in size to the 350 meter cable-stayed span over the Mississippi River currently under construction at Cape Girardeau, Missouri, USA; and the U.S. record 420 meter cable-stayed span over the Mississippi River near Greenville, Mississippi, USA was developed using both finite elements and conventional direct stiffness modeling. Stress results are compared for the full-scale model using both the *current method* of practice as well as the proposed *modified method*. Stress results, similar to those shown in Fig. A-2, are presented.

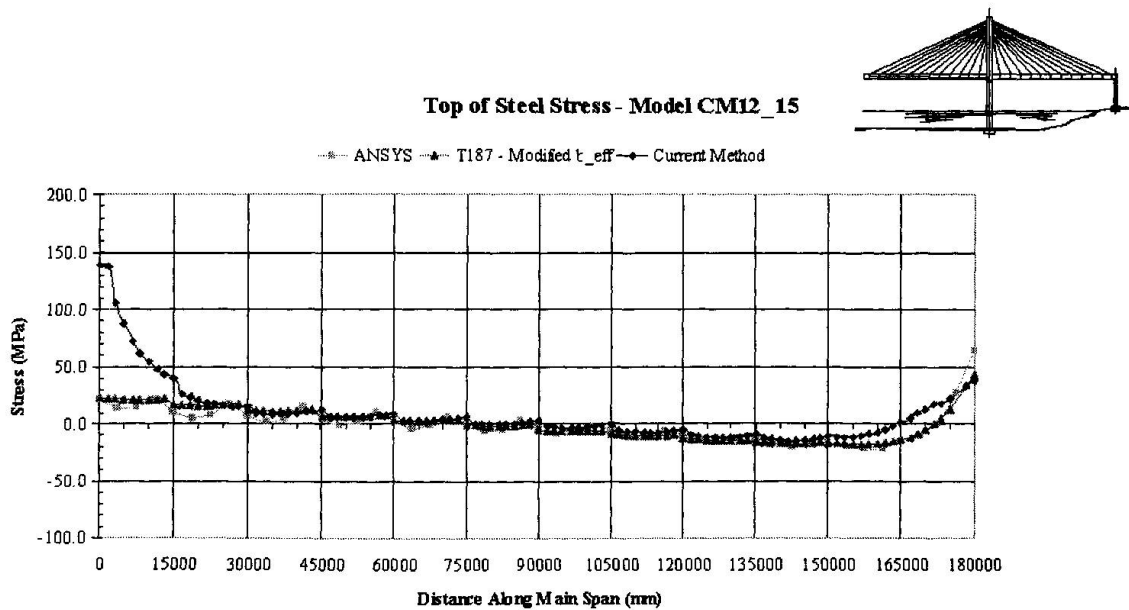


Figure A-2 Top Flange Stress Comparison