

Zeitschrift: IABSE reports = Rapports AIPC = IVBH Berichte
Band: 82 (1999)

Artikel: Vibration control of stay cables
Autor: Stubler, J. / Ladret, P. / Domage, J.B.
DOI: <https://doi.org/10.5169/seals-62162>

Nutzungsbedingungen

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

Conditions d'utilisation

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

Terms of use

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

Download PDF: 05.08.2025

ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>



Vibration Control of Stay Cables

J. STUBLER

Technical Director
Freyssinet International
Vélizy (France)

P. LADRET

Principal Engineer
Freyssinet International
Vélizy (France)

J.B. DOMAGE

Principal Engineer
Freyssinet International
Vélizy (France)

Abstract

During the recent past years several analyses have been conducted dealing with the vibration characteristics of stay cables. The fundamental theories as well as the fundamental behaviour of various types of cables have been developed. At the same time, various remedies and vibration control devices were proposed by contractors and suppliers.

This paper reviews the previously used systems and presents the up-to-date technology which is available today. It covers the streamline sheath coping with the rain and wind vibration phenomena, the internal or external hydraulic dampers, the visco-elastic dampers and the damping cross ropes. Calculations of the damping system characteristics, prediction and measurement of the damping ratio are presented.

1. Introduction

Cable vibrations can be excited by dynamic wind forces acting directly on the cable itself or by the movements of the cable attachments on the pylon or on the deck due to the action of traffic loads or of the wind itself. Four different sources of vibrations are considered in the analysis :

- parametric excitation by the movements of the pylons and the deck ;
- rain and wind vibration ;
- low wind dry vortex ;
- galloping.

2. Damping technologies

2.1 Damping ropes

The natural frequency of the stays can be modified by means of transversal cables connected to them. This solution which is effective although expensive and delicate to install has been used for some large bridges. It is recommended when the vibration frequencies of the deck or pylon are close to the frequencies of the stay cables.

2.2 External hydraulic damper

This damper is specifically designed to each project. The damping capacity can be tuned to obtain the required logarithmic decrement. However it requires a regular maintenance and it is not always meeting the aesthetics objective of the designer.



2.3 Internal visco-elastic damper (IED) and Internal hydraulic damper (IHD)

This damper is completely invisible from the deck since it is located inside the steel guide pipe of the stay cable.


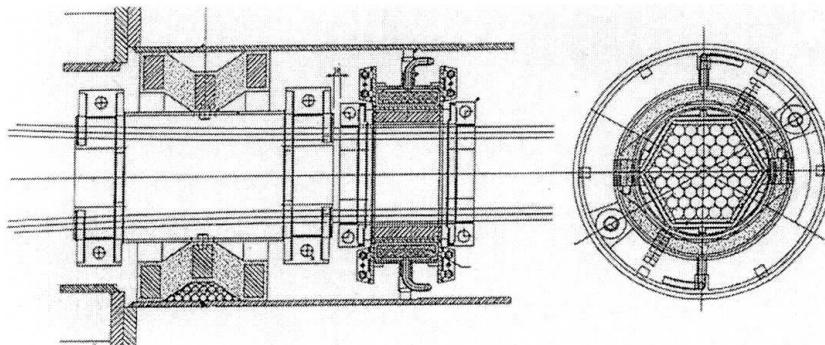


Figure 1

3. Vibration control

Calculation models have been developed to evaluate the logarithmic decrement δ provided by the various types of damping systems. A universal damping surface has been established allowing an accurate tuning of the damper.

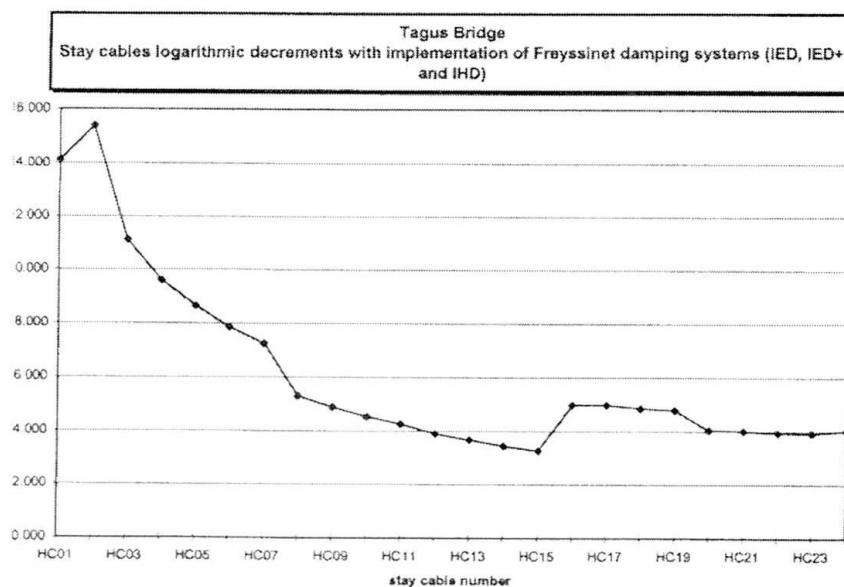

Tagus bridge Lisbon (Portugal)