

**Zeitschrift:** IABSE reports = Rapports AIPC = IVBH Berichte  
**Band:** 82 (1999)  
  
**Artikel:** Field observation on aerodynamic response of Meiko West Bridge  
**Autor:** Suzuki, Yuji / Mizuguchi, Kazuyuki / Ueda, Toshio  
**DOI:** <https://doi.org/10.5169/seals-62168>

### **Nutzungsbedingungen**

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

### **Conditions d'utilisation**

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

### **Terms of use**

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

**Download PDF:** 05.08.2025

**ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>**

## Field Observation on Aerodynamic Response of Meiko West Bridge

**Yuji SUZUKI**  
Japan Highway Public Corp.  
Nagoya, Japan

**Kazuyuki MIZUGUCHI**  
Japan Highway Public Corp.  
Nagoya, Japan

**Toshio UEDA**  
Hitachi Zosen Corp.  
Osaka, Japan

**Satoru SAKUMA**  
Japan Highway Public Corp.  
Nagoya, Japan

**Toshiaki MAEKAWA**  
Japan Highway Public Corp.  
Nagoya, Japan

**Yoshikazu KOBAYASHI**  
Hitachi Zosen Corp.  
Osaka, Japan

### Abstract

The Meiko West Bridge is composed of two cable-stayed bridges with flat box girders. The interval between parallel cable-stayed bridges is 50m as shown in Fig.1. The phase I line bridge completed in 1985 has been put in service, and the phase II line bridge was finished in 1998. Now both bridges become a part of the Ise-Bay Highway that will link the New Tomei and Meishin Expressways.

The aerodynamic stability of these bridges in tandem arrangement was investigated by the wind tunnel tests using the 3-dimensional aeroelastic models with the scale of 1/100 in Hitachi Zosen's wind tunnel facility. From the results, it is concluded that the vortex-induced oscillation occurs in a smooth flow, but it vanishes in a turbulent flow. In order to certify those phenomena, the field observation was carried out from the early erection stage to the final erection stage at which the both side girders were connected at the center of the main span.

The characteristics of the wind on the site were measured by the ultrasonic anemometer and the girder responses were picked up by the servo-type accelerometer.

Many precious data including monsoon in winter and three times typhoons in 1997 were recorded by the automatic measuring systems.

The wind direction was predominantly northwest on the land side and southeast on the seaside, and so it inclined diagonally to the axis of the bridge girder respectively.

The response data are similar to the one derived from the wind tunnel tests in a boundary layer turbulent flow with 10% or 15% intensity of turbulence, and so it is estimated that the aerodynamic safety of these bridges is enough.

It is well known that the rain-wind-induced vibration was discovered under construction of the phase I line bridge of the Meiko West Bridge in Japan. By this time all stay cables of this bridge have been connected mutually by the wire ropes. Therefore it will be necessary for any controlling device to be installed if the same phenomenon occurs on the phase II line bridge. To obtain the materials for the design judgement, the field observation of the stay-cable's motion was carried out simultaneously.

Ten times rain-wind-induced vibration's data and many vortex-induced oscillation's data were obtained.

The hard rubbers for suppression of bending at the end of cables and the rubber covers for sealing the cable-anchorage pipes are set on the phase I line bridge's stay-cable



after completed, but there is no such attachments on the phase II line bridge cables under construction. Therefore, the aspect of the rain-wind-induced oscillations of two bridges are different each other. That is, the oscillation in the phase I line bridge's cables is composed of many vibration modes, i.e. from 1st to 20th mode, and on the other hand the oscillation of the phase II line bridge's cables includes only a few low-frequency modes.

The maximum total value derived from the addition of each mode's displacement is about 30cm on the phase I line bridge and about 10cm on the phase II line bridge, respectively. Those results show that there is no problem in the fatigue strength of the stay-cables. But, from the view point of serviceability, the controlling devices with high viscous damping rubbers were installed on both bridges taking the aesthetic design into consideration.

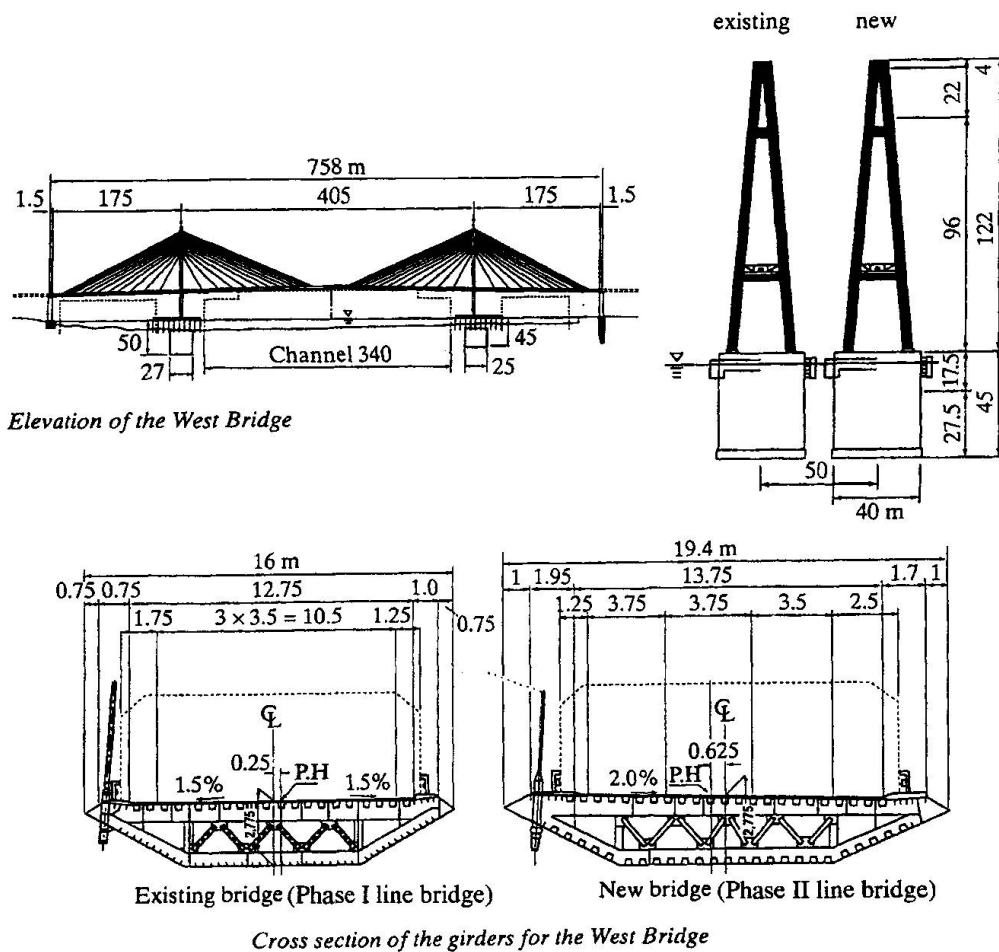


Fig.1 Outline of Meiko West Bridge