

Zeitschrift: IABSE reports = Rapports AIPC = IVBH Berichte
Band: 82 (1999)

Artikel: Dynamic tests on Vasco da Gama cable-stayed bridge
Autor: Cunha, Álvaro / Caetano, Elsa / Calçada, Rui
DOI: <https://doi.org/10.5169/seals-62175>

Nutzungsbedingungen

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

Conditions d'utilisation

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

Terms of use

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

Download PDF: 07.02.2026

ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>

Dynamic Tests on Vasco da Gama Cable-Stayed Bridge

Álvaro CUNHA
Assistant Professor
University of Porto
Porto, Portugal

Rui CALÇADA
Assistant
University of Porto
Porto, Portugal

Elsa CAETANO
Assistant
University of Porto
Porto, Portugal

Raimundo DELGADO
Associate Professor
University of Porto
Porto, Portugal

Abstract

The Vasco da Gama Bridge is the new Tagus River crossing in Portugal, 17300m long, including three interchanges, a 5km long section on land and a continuous 12300m long bridge, recently constructed close to the area of EXPO-98 international exhibition. It includes a cable-stayed component (Figure 1) over the main navigation channel with 420m central span and three lateral spans (62+70.6+72m) on each side, corresponding to a total length of 829.2m between transition piers. The bridge deck is 31m wide and is formed by two lateral prestressed girders, 2.6m high, connected by a slab and by transverse steel I girders. It is continuous along its total length and it is suspended at level 52.5m by two plans of 48 stays connected to each tower. The two towers are H shaped and 147m high above a massive zone at their base as protection against ship collision.

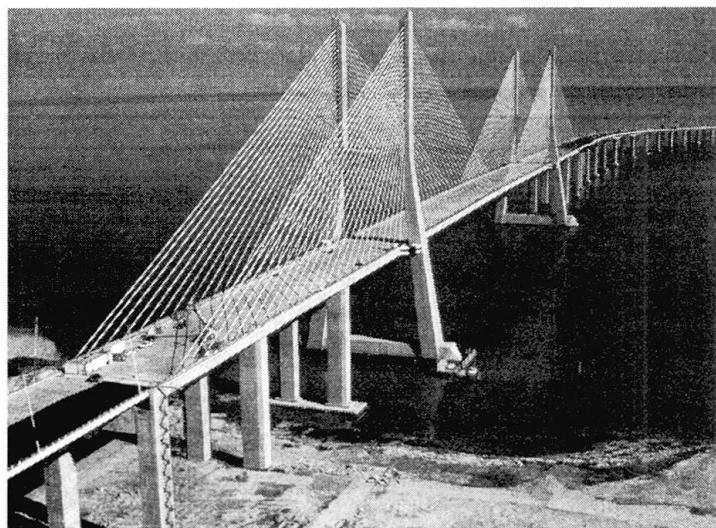


Figure 1: View of Vasco da Gama cable-stayed bridge

Due to the high proneness of long span bridges to be affected by aerodynamic instability problems, as well as to the high seismic risk of the Southern part of Portugal, the dynamic behaviour of Vasco da Gama cable-stayed bridge has been extensively studied using both experimental and numerical approaches. In particular, dynamic tests have been performed by the University of Porto in order to experimentally identify the most relevant modal parameters of the cable-stayed bridge from the aerodynamic and seismic behaviour point of view, and correlate them with the corresponding parameters provided by the 3-D numerical model developed by EEG (Europe Etudes Gecti, Villeurbanne, France), using the finite element program Hercules.

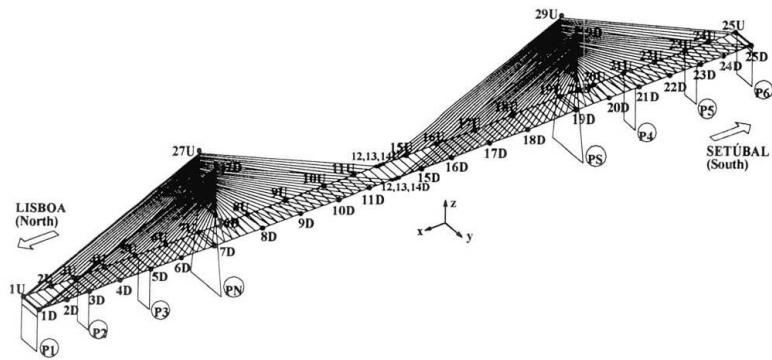


Figure 2: Schematic representation of the bridge with indication of the measurement sections used in the ambient vibration test

These dynamic tests, involved the following main tasks:

- preliminary measurements for evaluation of the levels of acceleration signals and identification of an appropriate reference section;
- development of an ambient vibration test for identification of natural frequencies and mode shapes, involving tri-directional measurements at 58 distinct points along the deck and towers;
- performance of response measurements under the passage of heavy trucks, passing over a hood plank, to increase the vertical accelerations;
- development of a free vibration test by sudden release of a mass of 60t suspended from the deck, in order to accurately identify modal damping factors;
- performance of dynamic measurements on some of the longest stay cables so as to identify global and local natural frequencies, both using conventional piezoelectric accelerometers and a laser Doppler velocity transducer;
- experimental evaluation of dynamic amplification factors (DAFs) associated to the passage of heavy traffic at different speeds and along several lanes.

This paper makes a brief presentation of these dynamic tests, which permitted, in particular, (i) to evidence the efficiency of the measurement system applied in the ambient and free vibration tests, based on the use of independent triaxial accelerographs conveniently programmed and synchronised by a portable PC; (ii) to obtain very accurate estimates of natural frequencies, mode shapes and damping factors, despite the rather low level of signal captured, the low range of natural frequencies of interest (0-1Hz) and the relatively high number of different modes of vibration in that range (iii) to achieve modal parameters estimates that present an excellent correlation with the corresponding parameters calculated on the basis of the 3D finite element model developed at the design stage; (iv) to stress the interest of application of a laser Doppler velocity transducer to perform dynamic measurements in stay cables, providing a simple and accurate alternative procedure for systematic performance of dynamic measurements in stay cables without direct contact with the cable surface; (v) to show the feasibility of experimental evaluation of DAFs.