

Zeitschrift: IABSE reports = Rapports AIPC = IVBH Berichte
Band: 83 (1999)

Artikel: Quality assessment and damage detection by monitoring
Autor: Wenzel, Helmut
DOI: <https://doi.org/10.5169/seals-62813>

Nutzungsbedingungen

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

Conditions d'utilisation

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

Terms of use

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

Download PDF: 05.02.2026

ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>



Quality Assessment and Damage Detection by Monitoring

Helmut WENZEL

Dr.-Ing.

Vienna Consulting Engineers
Vienna, Austria




Helmut Wenzel is chairman of WC V of IABSE. He earned a Ph.D. in Bridge Construction from the University of Vienna in 1978 and is the Managing Director of VCE, with offices in Vienna, Taiwan and Korea. Dr. Wenzel also teaches Bridge Design and Construction at the University of Vienna.

Abstract

Owners of structures realize the need for quality control tools to be applied for maintenance and rehabilitation planning as well as lifetime assessment. Practicing engineers highly desire quality control of construction and a feedback from structures for more economic design and better understanding of the performance. Researchers were always fascinated by the potential of full scale dynamic tests of structures. These common aspects triggered the development of structural monitoring. Each structure has its typical dynamic behavior which may be addressed as vibrational signature. Any changes in a structure, such as all kinds of damages leading to decrease of the load carrying capacity have an impact on the dynamic response. This suggests the use of the dynamic response characteristic for the evaluation of quality and structural integrity. Monitoring of the dynamic response of structures makes it possible to get very quick knowledge of the actual conditions and helps in planning of rehabilitation budgets.

General

Monitoring the quality of structures comprises a wide field of engineering tasks. The most promising recent development has been achieved with Ambient Vibration Testing and dynamic System Identification tools.

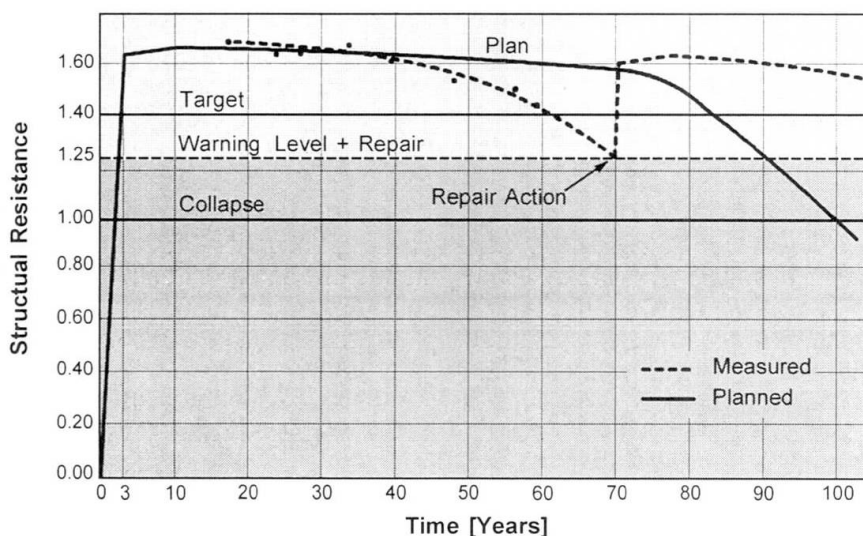

Therefore this contribution concentrates on this subject. Life time assessment is another high light. The full paper provides a brief history of monitoring, an introduction to the most important tools of system identification. 12 examples of application are provided out of which 2 are shown in the following page. There seems to be no limit in application.

Fig. 1 Development of resistance over time

Quality Control of Construction

The vibrational characteristic changes with each construction stage. Monitoring instruments are able to record these changes and therefore confirm the quality of construction steps carried out. Another benefit is that major impacts are recorded which might influence the quality of the structure. In case of cable stayed bridges the stresses in the cables can be monitored and compared to the desired values. Another application is the check of the removal of temporary fixations during construction. Complex systems can so be checked easily as demonstrated in Fig. 2.

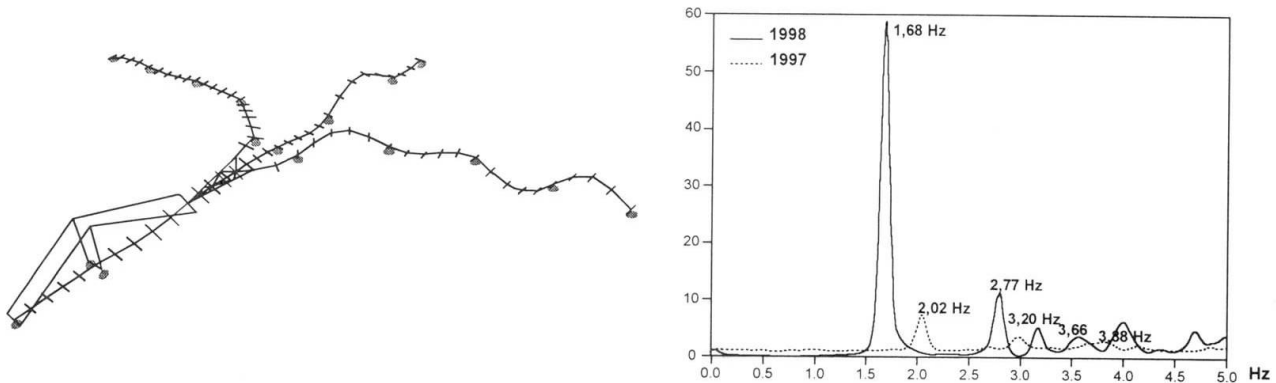


Fig. 2 Hall West Bridge, effect of the release of a horizontal restraint

Structures of the Cultural Heritage

The described method is not limited to bridges and towers, but can also be applied at monuments of the cultural heritage. The exceptional statue of Erzherzog Karl at the Heldenplatz in Vienna represents one of the two largest statues with a horse-rider situated on the two back shoes only. This 12 m high Bronze-statue is surrounded by thousand of tourists daily. The material properties of the structure formed 160 year ago can be assessed by the application of the vibrational characteristic method (Fig. 3). Consecutive measurement over a period of time provides information on the development of the structural integrity. Further application in this respect are the assessment of cantilever staircases built from natural stone, the assessment of the tiny structural members of Gothic churches and the integrity of Frescos and Mosaics.

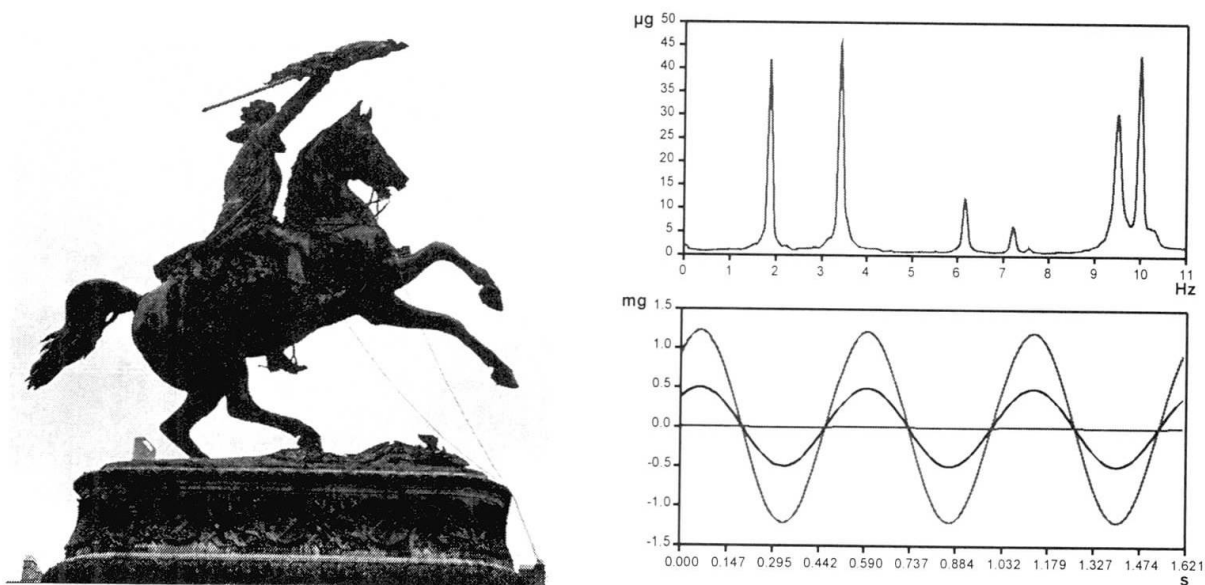


Fig. 3 Erzherzog Karl Statue with ambient spectrum and damping window