

**Zeitschrift:** IABSE reports = Rapports AIPC = IVBH Berichte  
**Band:** 83 (1999)

**Artikel:** Performance validation of large seismic response modification devices  
**Autor:** Seible, Frieder / Filiatrault, André / Benzoni, Gianmario  
**DOI:** <https://doi.org/10.5169/seals-62826>

#### **Nutzungsbedingungen**

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

#### **Conditions d'utilisation**

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

#### **Terms of use**

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

**Download PDF:** 05.02.2026

**ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>**



## Performance Validation of Large Seismic Response Modification Devices

### Frieder SEIBLE

Professor  
UC San Diego  
La Jolla, CA, USA

Born in 1952, received his Ph.D. in 1982 in Civil Engineering from the University of California, Berkeley.

### Gianmario BENZONI

Senior Development Eng.  
UC San Diego  
La Jolla, CA, USA

Born in 1956, received his Ph.D. in 1981 in Structural Engineering from the Politecnico Di Milano.

### André FILIATRAULT

Professor  
UC San Diego  
La Jolla, CA, USA

Born in 1960, received his Ph.D. in 1988 from the University of British Columbia, Vancouver, Canada

### Tom POST

Chief  
Caltrans, ESC  
Sacramento, CA, USA

Born in 1961, received his B.Sc.E. (Civil) in 1983 from The Univ. of Michigan and his Juris Doctor in 1990 from the Univ. of the Pacific, McGeorge School of Law.

## Abstract

In the seismic retrofit design of California's Toll Bridges, seismic isolation is used in several bridges to limit the seismic force input into the superstructure and to avoid costly superstructure retrofit measures which would require partial lane closures and traffic interruptions. Isolation bearings designed for these seismic bridge retrofit projects can have  $\pm 1.2$  m horizontal design displacements while carrying up to 50 MN of axial load from gravity and seismic overturning effects. Viscous dampers to provide energy absorption and deformation control at movement joints are designed with up to 5 MN capacity. Seismic Response Modification Devices (SRMDs) with these capacities have not been manufactured or tested to date and questions concerning scale-up effects for these response modification devices become critical since the safety of the retrofitted bridge relies on well defined friction and energy absorption characteristics. Only full-scale real-time dynamic testing of these new SRMDs can verify the actual response characteristics and thus validate the structural retrofit concept.

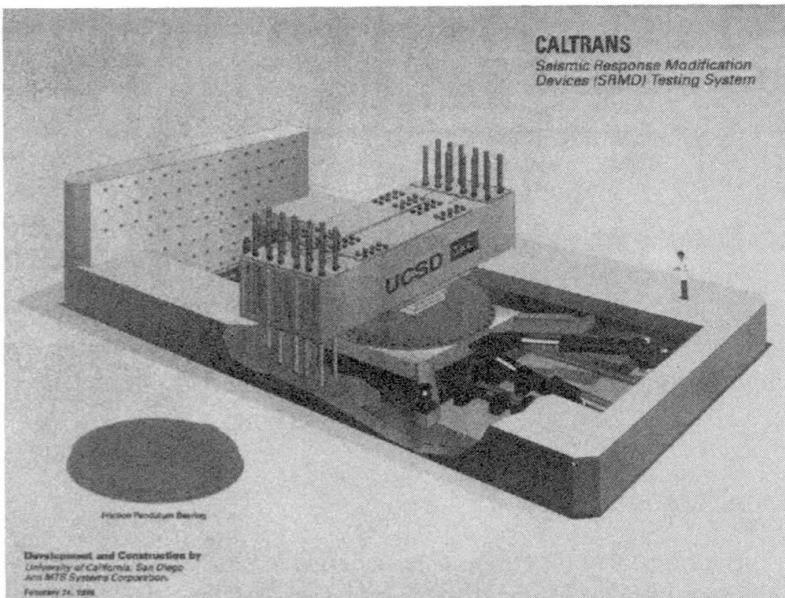


Fig 1 SRMD Test System

### The Caltrans Seismic Response

Modification Device Test System (SRMD), developed jointly by Caltrans, UCSD, and MTS, requires an exceptional hydraulic power, equal to about 19,000 liters (5,000 gal) of oil storage and pressurization through nitrogen gas up to 34 Mpa (5,000 psi), in order to achieve the technical specifications indicated in Table 1. The machine performance, the different types of isolating devices and dampers to be tested, and the testing objectives and procedures, drove the overall design approach. The isolating devices

considered were the Friction Pendulum System (FPS) and high damping rubber or lead core elastomeric isolation bearings, proposed solutions for the Benicia-Martinez and Coronado bridges, respectively, as well as viscous dampers and lock-up devices, common to almost all the toll bridge retrofit projects. Testing objectives ranged from slow speed uni-directional testing for basic performance characterization to high speed, 3-D testing for energy based analysis. The investigation of the effect of wear and aging was also an important issue in the proposed test program, through re-characterization of the performance of the prototype SRMDs already exposed to the actual bridge loads, deformations and environmental conditions. The testing system consists of a horizontal prestressed concrete reaction frame (concrete box), and of a moving platen, connected by four horizontal actuators to the concrete box. The platen slides over four hydraulic hydrostatic low friction bearings attached to the floor of the concrete structure. The platen also extends with four steel outrigger arms that support four low friction-sliding actuators at their tops. The testing system is completed by two additional reaction structures: a steel cross beam, removable and linked to the concrete box through a tie-down rod system, and a heavily prestressed reaction wall on one end of the machine. Due to the large displacements of the test specimens in the longitudinal and transverse directions, the traditional solution of a platen with hinge connection to horizontal and vertical actuators was not practical. This configuration would have required very long stroke vertical actuators, with deep excavation inside the existing building. Space limitations, difficulties of access for tall excavating equipment and the need to maintain the rest of the existing laboratory in working condition during construction made this solution impractical. The adopted solution was the use of 4 vertical hydraulic sliding bearings which support the moving platen, apply the vertical load, and allow horizontal motion and swivel capacity with very low friction (less than 0.2% of vertical force). The four horizontal actuators have a 2.5m stroke, 800 ton capacity and dual 20m<sup>3</sup>/min. servo-valves, and the 4 vertical low friction bearing actuators have 0.25m stroke, 2,000 ton capacity and 11m<sup>3</sup>/min. servo-valves each.

This paper describes the design, construction and performance characterization of a full-scale testing facility (Fig. 1) which will allow the real-time 6-DOF dynamic characterization of these new generation of seismic response modification devices for long span bridges.

*Table 1 Technical Specifications*

Vertical Force	53,400 kN
Longitudinal Force	8,900 kN
Lateral Force	4,450 kN
Vertical Displacement	±0.127 m
Longitudinal Displacement	±1.22 m
Lateral Displacement	± 0.61 m
Vertical Velocity	±254 mm/s
Long. Velocity	±1,778 mm/s
Lateral Velocity	±762 mm/s
Height of Specimen	Up to 1.52 m
Relative Platen rot.	±2°