

Zeitschrift: IABSE reports = Rapports AIPC = IVBH Berichte

Band: 83 (1999)

Artikel: External beam-column joints: the importance of stirrups

Autor: Reys de Ortiz, Icléa

DOI: <https://doi.org/10.5169/seals-62862>

Nutzungsbedingungen

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

Conditions d'utilisation

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

Terms of use

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

Download PDF: 01.04.2026

ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>



External Beam-Column Joints - The Importance of Stirrups

Icléa REYS DE ORTIZ

Civil Engineering
Univ. Federal do Rio de Janeiro
Rio de Janeiro, Brazil



Icléa Reys de Ortiz received her Civil Engineering and Master of Science degrees from the Catholic Univ. of Rio de Janeiro, Brazil. In 1993 she received her PhD from the University of Westminster - London - England.

Abstract

This paper presents the results of experimental tests on reinforced concrete external beam-column joints (T joints). The seven test specimens were designed planning to have real practical dimensions avoiding major size effects and at the same time suiting the rig arrangements that simulates the points of contraflexure in framed structures – see Figure 1. The concrete strength, the beam and the column reinforcement were intended to be the same for all the specimens. Different reinforcement details were used in the joints and in some tests the columns were axially loaded to simulate other floors in the building. The Beam-Column-Joint (BCJ) and the corresponding control specimens were tested the same day.

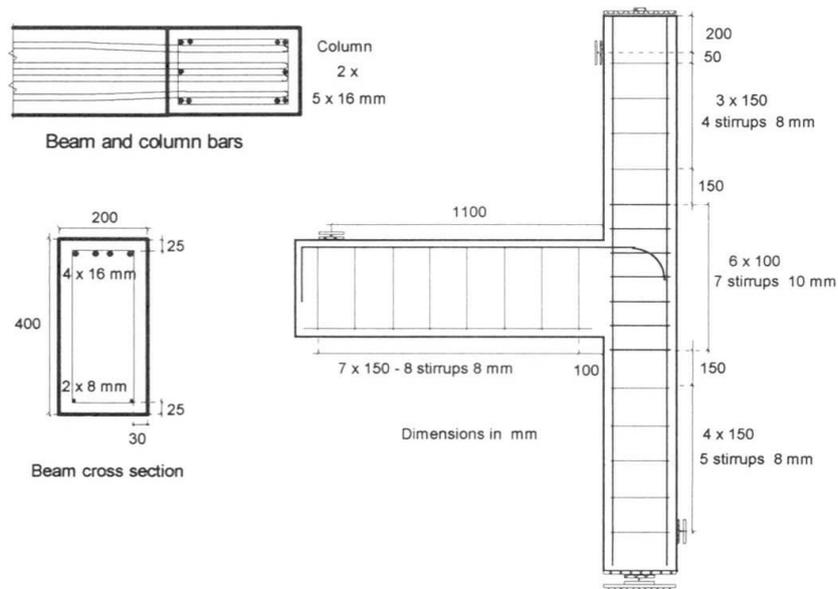


Figure 1 - Details of BCJ7

The aim of the tests was to study the internal mechanisms of stress transfer in the joints and the effects of the stirrups in the connection. The tests were carried out accompanied by strain measurements on the most important sections and on several points of the reinforcement. The crack patterns were observed and marked at each step of the tests.

Based on the measurements and on the observations during the tests, a strut-and-tie modelling is developed showing how the stirrups work.

A resistance analysis is developed based on the shear that acts in the connection (beam bars tension minus column shear) and the vertical forces coming from the column. This analysis shows that the transverse reinforcement has an important role at the ultimate resistance of the connection – see Figure 2 - but has no influence at the first thin crack appearance.

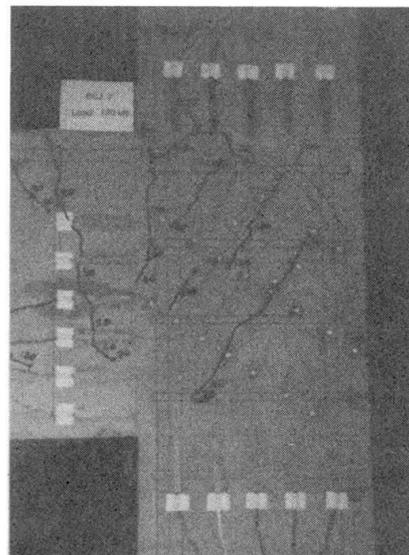
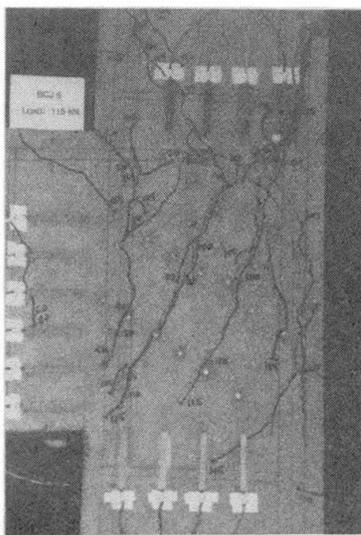


Figure 2 - a) BCJ6 – without stirrups – 115 kN

b) BCJ7 – with stirrups – 120 kN

The effect of the stirrups is limited by the concrete resistance of the joint – concrete strength and connection dimensions. Any excess of transverse reinforcement does not increase the strength of the joint.

A theory is proposed to analyse the shear strength and to design the transverse reinforcement (stirrups) for this type of joint.

These tests have shown that the active stirrups have to be evenly distributed between the direction of the top of the beam chord and the main beam bars (at the top of the beam). At least two extra stirrups should be located up to half column depth above the connection to guarantee the region to where the cracks tend to run.

The observations, conclusions and analysis of this work have been seen to concur with published test results.