

# Traffic load models and weigh-in-motion data

Autor(en): **Bailey, Simon / Schumacher, Ann / Nussbaumer, Alain**

Objektyp: **Article**

Zeitschrift: **IABSE reports = Rapports AIPC = IVBH Berichte**

Band (Jahr): **83 (1999)**

PDF erstellt am: **01.05.2024**

Persistenter Link: <https://doi.org/10.5169/seals-62864>

## **Nutzungsbedingungen**

Die ETH-Bibliothek ist Anbieterin der digitalisierten Zeitschriften. Sie besitzt keine Urheberrechte an den Inhalten der Zeitschriften. Die Rechte liegen in der Regel bei den Herausgebern.

Die auf der Plattform e-periodica veröffentlichten Dokumente stehen für nicht-kommerzielle Zwecke in Lehre und Forschung sowie für die private Nutzung frei zur Verfügung. Einzelne Dateien oder Ausdrucke aus diesem Angebot können zusammen mit diesen Nutzungsbedingungen und den korrekten Herkunftsbezeichnungen weitergegeben werden.

Das Veröffentlichen von Bildern in Print- und Online-Publikationen ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. Die systematische Speicherung von Teilen des elektronischen Angebots auf anderen Servern bedarf ebenfalls des schriftlichen Einverständnisses der Rechteinhaber.

## **Haftungsausschluss**

Alle Angaben erfolgen ohne Gewähr für Vollständigkeit oder Richtigkeit. Es wird keine Haftung übernommen für Schäden durch die Verwendung von Informationen aus diesem Online-Angebot oder durch das Fehlen von Informationen. Dies gilt auch für Inhalte Dritter, die über dieses Angebot zugänglich sind.



## Traffic Load Models and Weigh-In-Motion Data

### **Simon BAILEY**

Senior Research Engineer  
MCS - DGC - EPFL  
Lausanne, Switzerland

Simon Bailey graduated from Southampton University and received his doctorate from the Swiss Federal Institute of Technology in Lausanne (EPFL). Since 1996 he is Head of the Structural Evaluation Groups at MCS and ICOM at EPFL

### **Ann SCHUMACHER**

Doctoral Student  
ICOM - DGC - EPFL  
Lausanne, Switzerland

Ann Schumacher graduated from Dalhousie University and received her Master of Science from the University of Alberta. Since 1997 she has been working as a research engineer at ICOM, EPFL

### **Alain NUSSBAUMER**

Senior Research Engineer  
ICOM - DGC - EPFL  
Lausanne, Switzerland

Alain Nussbaumer graduated from the Swiss Federal Institute of Technology in Lausanne (EPFL) and received his doctorate from Lehigh University. He is currently a Lecturer and Head of the Fatigue Group at ICOM, EPFL

## **Summary**

During the evaluation of an existing bridge, measurements at the site can be used to update the traffic load model. Measurements can be made with either temporary Weigh-In-Motion (WIM) sensors installed on the road surface or with strain gauges installed on the structure. The aim of updating a traffic load model is to avoid costly interventions on an existing bridge that are often proposed as a result of an assessment using a design traffic load model. This paper presents the measurement of traffic loads and effects at a bridge site in Switzerland. Simultaneous measurements with temporary WIM sensors placed adjacent to a bridge and strain gauges on bridge elements were used to study vehicle characteristics and traffic load effects. The results of this study provide valuable information about the effects of actual traffic on bridges and the use of WIM data for bridge evaluation.

**Keywords:** Road bridges, traffic loads, weigh-in-motion, strain measurement.

## **Strain measurements**

Static and dynamic load tests were carried out during a bridge closure using two 3-axle test vehicles with a total weight of approximately 25 tonnes each. Continuous dynamic measurements under normal traffic conditions were subsequently made over two periods totalling 18 days. Strain measurements during the static load test enabled the behaviour of the bridge to be assessed. These measurements showed that traffic load effects were lower than assumed during design, thereby illustrating the advantage of carrying out measurements on a structure as opposed to using a default structural model.

By processing the strain data from continuous measurement under normal traffic, it was possible to filter out noise, dynamic effects and temperature effects in order to identify vehicle loading events and to determine the peak static effect of traffic actions during each event. Figure 1 shows a histogram of peak stresses obtained by processing data recorded over a period of three days.

## **WIM Traffic survey**

The vehicle survey was carried out using temporary Weigh-In-Motion sensors installed on the road surface at a distance of approximately 200 metres from the bridge. The portable WIM system consists of inductive loops to detect the presence of a vehicle and to measure its speed and length combined with WIMstrip capacitive sensors that weigh half of each axle. More than 30 000 heavy vehicles were measured using the WIM system over a period of 18 days. However, the system is

sensitive to vehicle speed and experiences problems measuring axle groups. For this reason, erroneous measurements were later filtered out and approximately 10,600 heavy vehicles were retained for further analysis. A histogram of heavy vehicle total weight is shown in Figure 2.

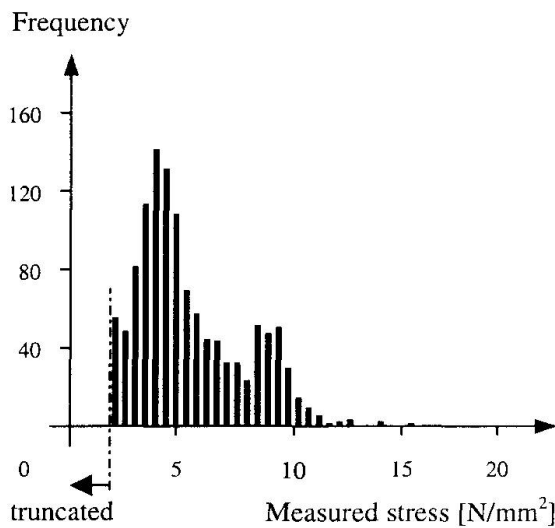


Fig. 1. Histogram of peak stresses measured under normal traffic conditions

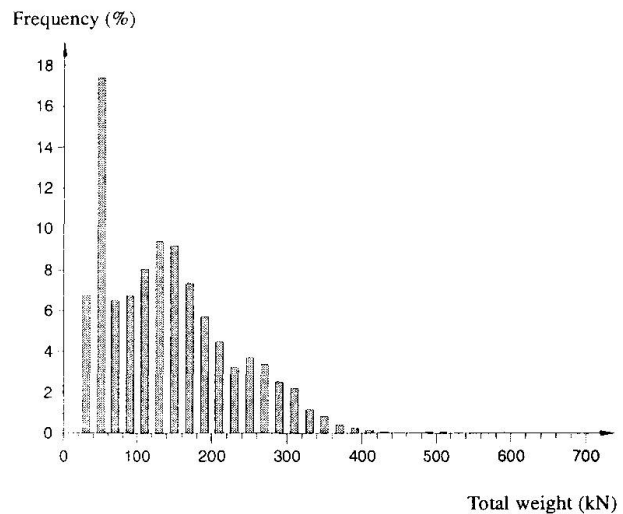


Fig. 2. Histogram of heavy-vehicle total weight

## Discussion

The two approaches to updating traffic load models involve different amounts of effort and yield results of different quality. The continuous measurement of strains in a bridge requires expensive equipment and the use of expert technicians as well as complex data post-processing. On the other hand, the use of temporary WIM sensors is relatively straightforward and real-time processing produces vehicle data that is easy to use. In terms of financial investment in equipment and man-time, strain measurement is approximately twice as expensive as the use of temporary WIM sensors. This comparison of cost should in turn be balanced against the value of the data collected. In this respect, this study has shown that strain measurement yields precise data about traffic action effects and bridge behaviour, whereas vehicle data collected using temporary WIM sensors is subject to significant uncertainty. A decision about which approach to adopt must therefore be made by considering the purpose of measurement. If vehicle counting and a general idea of average vehicle loads is required then temporary WIM sensors suffice, otherwise a more costly permanent installation of WIM sensors is necessary for weight data of greater accuracy. If dynamic traffic action effects and bridge behaviour are of interest then strain measurement is preferable.

## Conclusions

The measurements carried out as part of the study presented in this paper clearly demonstrate the relative advantages and disadvantages of two approaches to updating design traffic load models for bridge evaluation.

A traffic survey with a temporary WIM system has shown that measurements are subject to significant dispersion. The prediction of extreme traffic loads, in particular, is therefore subject to high uncertainty. Furthermore, traffic action effects calculated using traffic data are dependent on an assumed bridge model, thus introducing further uncertainty.

Strain measurement provides accurate information about the actual traffic action effects on a structure, but is limited to instrumented elements. Direct measurement provides information about load distribution within a structure, the combined effect of vehicles and dynamic effects. However, the volume of strain data recorded should be reduced by processing in real time.