

**Zeitschrift:** Ingénieurs et architectes suisses  
**Band:** 111 (1985)  
**Heft:** 1-2

**Artikel:** Ultimate load behaviour of longitudinally and transversally web plates loaded in shear  
**Autor:** Mele, Michele / Puhali, Rome / Puhali, Roberto  
**DOI:** <https://doi.org/10.5169/seals-75603>

### **Nutzungsbedingungen**

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

### **Conditions d'utilisation**

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

### **Terms of use**

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

**Download PDF:** 14.03.2026

**ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>**

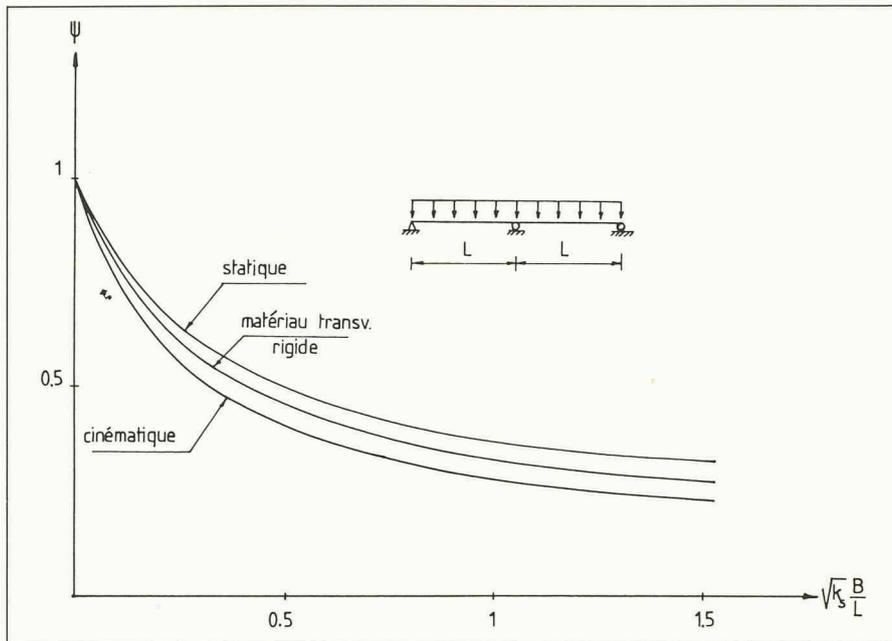


Fig. 4. — Poutre continue à deux travées égales chargées uniformément.

Dans le cas d'une semelle isotrope, on a :  $E_x = E_y$  et en admettant  $E/G = 2,6$  pour les matériaux métalliques,  $\omega^2$  vaut 2,191. La largeur effective vaut alors :

$$\psi = \frac{1}{1 + 0,757 \frac{Pb}{M}} \quad (35)$$

On peut généraliser au cas d'une charge supplémentaire uniformément répartie, on trouve aisément :

$$\psi = \frac{1}{1 + \frac{1}{3} \frac{E}{G} \frac{pb^2}{M} + \frac{P\omega b}{4 M \left( \frac{G}{E_x} + \frac{\omega^2}{21} \right)}} \quad (36)$$

Il n'y a plus de relation simple entre  $\omega$  et  $k_s$  et il n'est plus possible d'obtenir une formule générale équivalente à (25). Dans le cas d'un matériau isotrope, pour lequel  $k_s = 2,6$ , on a :

$$\psi = \frac{1}{1 + \frac{1}{12} k_s \frac{pB^2}{M} - 0,235 \sqrt{k_s} \frac{\Delta T \cdot B}{M}} \quad (37)$$

puisque  $B = 2 b$  et  $\Delta T = -P$ .

5. Conclusions générales

L'expression de la largeur efficace réduite s'écrit, en toute généralité, sous la forme simple suivante :

$$\psi = \frac{1}{1 - \alpha \sqrt{k_s} \frac{B\Delta T}{M} + \frac{k_s}{12} \frac{pB^2}{M}} \quad (38)$$

où  $k_s$  est un coefficient d'orthotropie (pour plus de détails, consulter [2], [3]), qui dans le cas d'une semelle isotrope se réduit au rapport  $E/G$ .

En développant successivement l'approche «exacte» (r) pour le matériau transversalement rigide [3], puis l'approche cinématique (c) et l'approche sta-

tique (s), on trouve que le coefficient  $\alpha$  correspondant prend les valeurs ci-après :

$$\alpha_r = 0,270 \quad \alpha_c = 0,323 \quad \alpha_{st} = 0,235$$

Cette dernière valeur  $\alpha_{st}$  n'est valable que pour un matériau isotrope; si la valeur de  $k_s$  augmente, elle se rapproche de  $\alpha_r$ .

Les figures 3 et 4 fournissent respectivement les résultats obtenus pour la largeur efficace d'une part, à mi-portée d'une poutre sur deux appuis, chargée d'une force concentrée dans cette même section, et d'autre part, sur l'appui intérieur d'une poutre continue à deux travées égales, chargée uniformément. On observera que l'approche basée sur l'hypothèse du matériau transversalement rigide est sensiblement la moyenne des deux autres.

Tout en gardant à l'esprit que, en toute rigueur, les solutions proposées ne don-

Bibliographie

- [1] MASSONNET CH.: *A New Approach (Including Shear Lag) to Elementary Mechanics of Materials*. International Journal of Solids and Structures, vol. 15, n° 1, 1983, pp. 33-54.
- [2] MAQUOI R. et MASSONNET CH.: *Une évaluation simple de la largeur efficace de trainage de cisaillement*. Construction métallique, n° 2, 1982, pp. 17-24.
- [3] JETTEUR PH., MAQUOI R. et MASSONNET CH.: *A Simple General Solution of the Shear Lag Phenomenon*. Festschrift Roik, Mitteilung nr. 84-3, Technisch-Wissenschaftliche Mitteilungen, Institut für Konstruktiven Ingenieurbau, Ruhr-Universität Bochum, Sept. 1984, pp. 74-90.
- [4] SEDLACEK G. et BILD S.: *Simplified Rules for the Determination of the Effective Width of Bridge Decks caused by Shear Lag*. Verba volant, scripta manent. Volume d'hommage au professeur Massonnet, Liège, 1984, pp. 333-348.
- [5] FRAEIJIS DE VEUBEKE F.: *Upper and Lower Bounds in Matrix Structural Analysis*. AGARDograph, 72, 165, Pergamon Press, 1964.
- [6] FRAEIJIS DE VEUBEKE F.: *Displacement and Equilibrium Models in the Finite Element Method*. Stress Analysis,

nent des bornes que pour l'énergie, le faible écart entre les courbes obtenues donne à penser que l'approche préconisée fournit des résultats fort voisins de la solution exacte.

Auteurs :

Charles Massonnet, professeur honoraire  
René Maquoi, chargé de cours associé  
Philippe Jetteur, ancien chercheur IRSIA  
Université de Liège  
Institut du génie civil  
Quai Banning 6, 4000 Liège (Belgique)

## Ultimate Load Behaviour of Longitudinally and Transversally Web Plates Loaded in Shear

by. Michele Mele, Rome and Roberto Puhali, Trieste

### 1. Introduction

In more recent years a lot of experimental and theoretical work has been devoted to the study of stiffened web panels loaded beyond the critical load until the point of collapse. Among the design methods which have been developed as a result of these research works the one by Rockey, Evans and Porter [1] named Cardiff Method, is well known and has already been introduced into some codes. Ano-

Summary

The paper briefly reports a general method for designing stiffened webs loaded in shear, which allows for any kind of stiffening. The cases of compact and stiffened flanges are separately dealt with. The theoretical procedures, the experimental and numerical research programmes carried out during the last ten years, as well as the comparison with other design methods are described.

ther design method, named Trieste Method [2], was proposed by the authors [3], [4] and was introduced into the Italian Code in 1973. Its main features are to

<sup>1</sup> See references at the end,

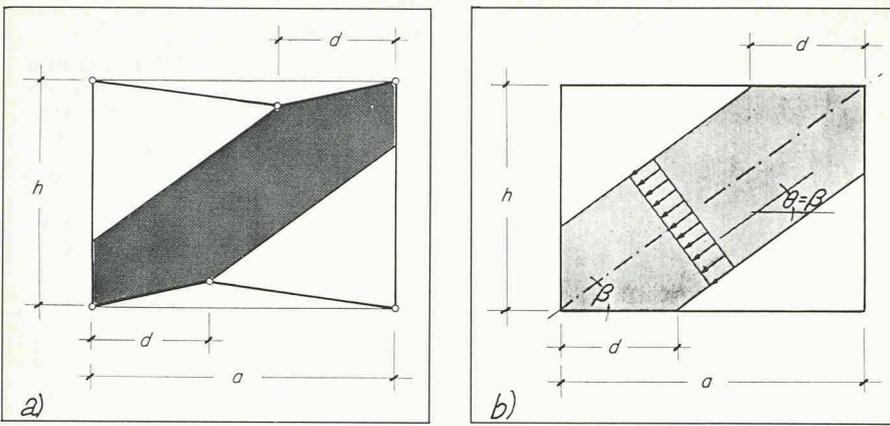


Fig. 1. - Collapse mechanism.

point out a new design philosophy which requires ultimate and serviceability checks and to allow for the most general web stiffening; in fact transverse ribs and longitudinal ones as well may be considered.

All these methods can be applied to design webs in plate girders built up with compact flanges; so they cannot be employed when "no compact" stiffened flanges are used. The last case is typical of steel bridges, when orthotropic plates are used for deck or bottom flange of box girders.

This paper reviews the results of an extensive theoretical and experimental research project the authors have been performing for ten years in order to extend the design method to bridge girders characterised by:

- low values of the aspect ratio  $\alpha$ ,
- longitudinal stiffening,
- stiffened flanges.

## 2. Plate Girders with Compact Flanges

As already pointed out the proposed method requires checking at the critical and ultimate state as well.

The critical state is considered as a serviceability limit state and the check is performed by limiting the shear stress in web panels and the relative rigidity of transverse stiffenings:

$$\tau \leq \tau_{cr} \quad \gamma \geq \gamma^* \quad (1)$$

Such a control is justified by the fact that critical load is the threshold of sensitivity to deformations for perfect or near perfect structures [3]. Also for fatigue prevention as well as for psychological motives, the deformations must be limited under service loads.

The collapse mechanism adopted for calculating the ultimate load (fig. 1) ignores the frame contribution to shear resistance and assumes for the slope of the tensile stress field in the panel an angle equal to the one of the geometrical diagonal if the aspect ratio  $\alpha$  is higher than one, otherwise this angle must be taken as equal to 45°. It is further assumed that the diagonal stresses will take the shape of a strip and that plastic hinges be located where the strip joins the flanges. The presence of longitudinal stiffenings is

taken into account by fictitious values for the web thickness.

The transverse stiffeners, which are loaded by an axial force and a bending moment, are checked by the simple formula [5]:

$$\frac{P}{P_{cr}} + \frac{M}{M_p (1 - P/P_E)} \leq 1 \quad (2)$$

The critical load ( $P_{cr}$ ) and the Euler one ( $P_E$ ) are calculated assuming an effective length of the strut equal to half of the length of the stiffener; this is to allow for the load variability along its length and the actual constraint conditions. The transverse resistant section of the stiffener is defined by taking into account a collaborating width of web equal to [4], [6]:

$$b_w = 70 t_w \left( 1 - \frac{\sqrt{3} \tau_{cr}}{f_{yw}} \right) \quad (3)$$

The longitudinal stiffeners are designed assuming that their main job is to increase the critical load of the web panel between two adjacent transverse ribs; so only the flexural rigidity is to be checked. The reliability of this simple design method has been controlled by an extensive research programme carried out by experimental and numerical tests [4], [5], [6], [7].

The experimental research programme was carried out by testing twentyseven beams. They were built up like the three basic models illustrated in figure 2, but they differed one from each other in the web stiffening. During the tests strains in the flanges and web, vertical deflections at midspan of the beam and transverse deflections of the web were recorded. The main conclusions drawn from the tests are:

- the ultimate loads predicted by the proposed design method are very close to the experimental ones, and in actual fact an average error of 2,1% with a standard deviation of 7,3% was obtained;
- in the case of aspect ratios ( $\alpha$ ) less than one, the results are more realistic than those obtained by applying the Cardiff Method, this is especially true when "smeared" longitudinal stiffenings are used;
- the same collapse mechanism is capable of describing the ultimate behaviour of webs longitudinally stiffened or not (figs. 3, 4, 5);
- longitudinal stiffeners, if there are only one or two, can only increase the critical load. As a matter of fact when their flexural rigidity is higher than the \* value no significant differences were observed in the case of  $\gamma = \gamma^*$ , as far as either the pre-critical or the post-critical behaviour of the beam is concerned;
- when the number of the longitudinal stiffeners is more than two they can be considered "smeared" along the

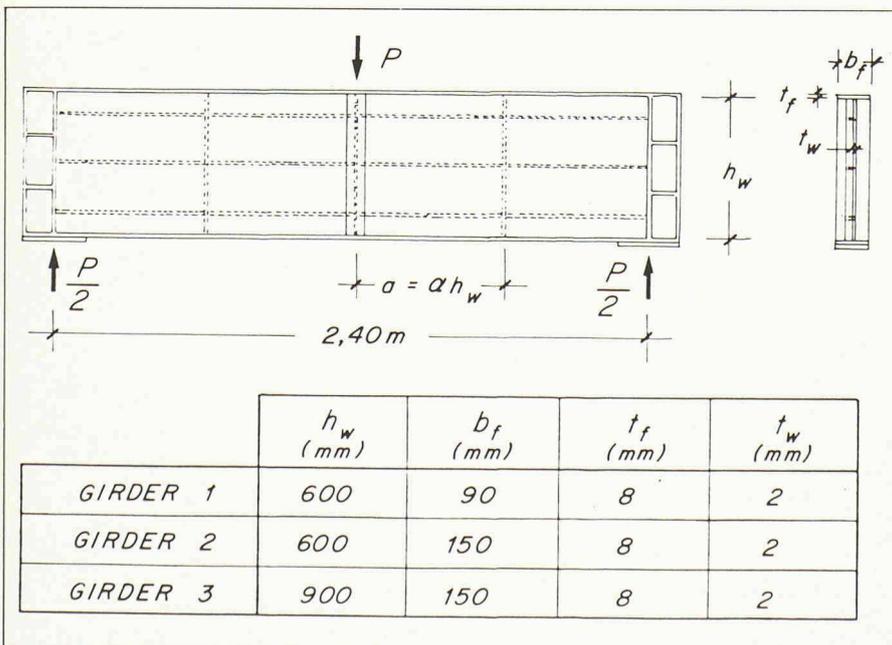


Fig. 2. - Test set up; Dimensions of the three basic models.

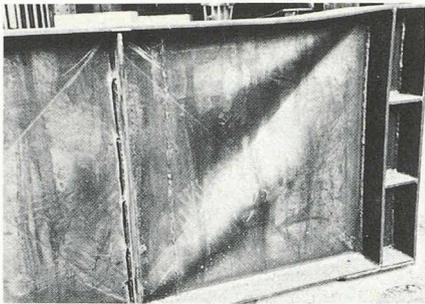


Fig. 3. — Typical collapse of a girder without longitudinal stiffener.

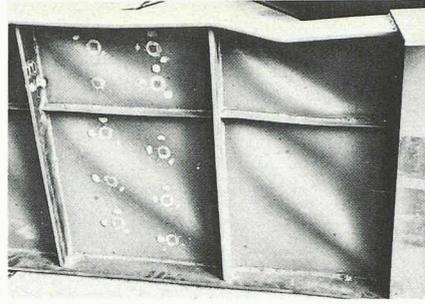


Fig. 4. — Typical collapse of a girder with one longitudinal stiffener.

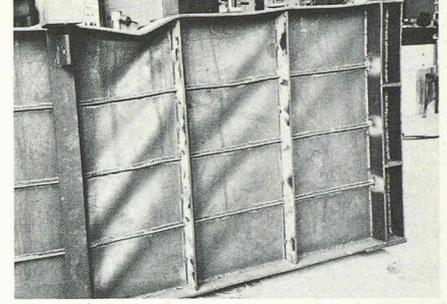


Fig. 5. — Typical collapse of a girder with three longitudinal stiffeners.

web depth: then fictitious values for the web thickness can be determined and the same formulas valid for non longitudinally stiffened webs are still valid.

Furthermore the numerical tests demonstrated that the results obtainable from the proposed method for checking the transverse stiffeners are very close to those achieved through the approach proposed in [8] by Rockey, Valtinat and Tang, who supported their thesis by careful experimental work. But the present method may offer certain advantages, particularly in terms of practical simplicity and conceptual clarity, as well as being closer to the general lines of most current codes. The dimensioning of stiffeners through the B.S. 5400 method, as already pointed out in [9], would seem to be overprudent, leading to uselessly uneconomic design.

Initial imperfections in the stiffeners seem to have very little influence, and the same may be said of the destabilising effects due to states of stress, whether normal or tangential, acting on the web. However, in particular cases, the method proposed here could easily be refined: geometrical imperfections could be taken into account, or the normal stress acting on the stiffener could be fictitiously increased in the usual way, in order to evaluate particularly serious stress states in the web that might occur, for example, in continuous beams close to the intermediate supports, or in stayed-cable beams.

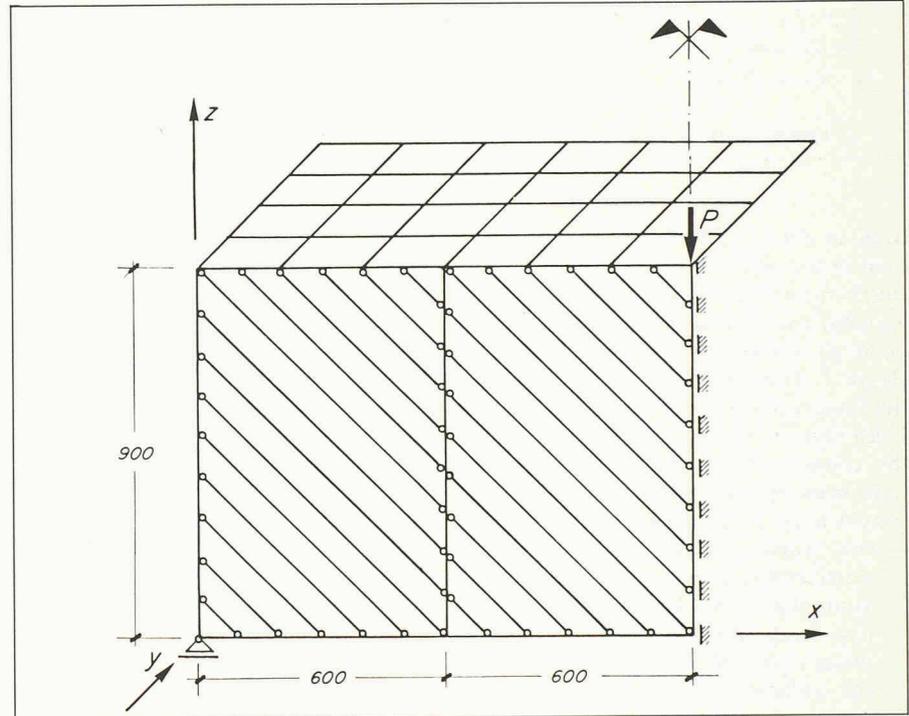


Fig. 6. — Analytical model for box girders with stiffened flanges

### 3. Plate or Box Girders with Stiffened Flanges

Neither the Cardiff nor the Trieste Method can be applied to plate or box girders built up with stiffened flanges, because they only allow for compact flanges; nevertheless it seems to be too conservative to neglect completely the contribu-

tion of stiffened flanges to the ultimate load capacity. In order to enlighten the correct way to allow for the rigidity and strength of the flanges a simple numerical model has been proposed [10], [11]. The analysis is performed in the post-critical range only by beam and truss finite elements; the former ones simulating flanges and stiffeners and the latter ones

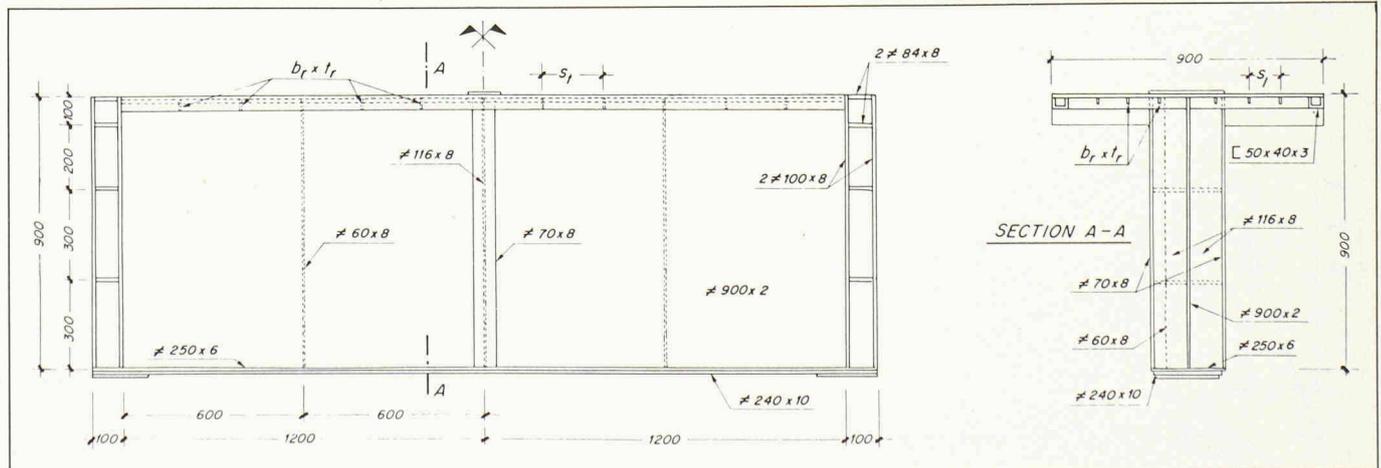



Fig. 7. — Size of one test series.

TAB. I: Geometrical properties of test girders

GIRDER NUMBER	PARAMETERS OF STIFFENED FLANGE RIBS (FOR EACH WEB PANEL)							
	N°	LONGITUDINAL			TRANSVERSE			N°
		$s_l$	$b_r$	$t_r$	$s_t$	$b_r$	$t_r$	
[mm]								
①*	3+3	100	20	2	2	200	40	4
②	3+3	100	20	2	1	300	40	4
③	2+2	133	30	3	2	200	50	5
④*	2+2	133	30	3	1	300	50	5
⑤ <sup>(2)</sup>	3+3	100	20	2	2	200	40	4
⑥ <sup>(2)</sup>	2+2	133	30	3	2	200	50	5
⑦ <sup>(1)</sup>	3+3	100	20	2	2	200	40	4
⑧ <sup>(1)</sup>	2+2	133	30	3	2	200	50	5

(1) GIRDERS ⑦ AND ⑧ HAVE A "WINE GLASS" FLANGE

(2) GIRDERS ⑤ AND ⑥ HAVE THE BOTTOM FLANGE STIFFENED



used to allow for the diagonal tension field in the web (fig. 6).

Furthermore an experimental programme has been performed by testing eight girders of the type illustrated in figure 7. The geometrical properties of the flanges are reported in table I.

Until now extensive numerical tests and the complete experimental programme have been carried out and the following conclusions can be drawn:

- the proposed analytical model can satisfactorily predict the real behaviour of girders with stiffened flanges (fig. 8), the higher percentage differences observed were less than 5%;
- the collapse mechanism is characterized by diagonal web strips of tensile stresses anchored both to vertical stiffeners and flanges, with the strip width anchored to the flanges depending on the rigidity of the flanges;
- the ultimate loads are considerably higher than the values predicted by

the "true Basler solution" with an improvement in carrying capacity provided by the stiffened flanges which averages 20% in the usual cases of orthotropic plates;

- a not negligible increase in the collapse load (more than 15%) can be achieved by employing "wine glass" connections between web and flanges;
- particular care must be paid to the design of the end-posts in order to avoid their premature failure, particularly in the case of not-very-stiff flanges.

#### 4. Conclusions

The simple method proposed by the authors (Trieste Method) can be safely used to design webs of plate girders built up with compact flanges in the presence of any kind of web stiffening by checking both the serviceability and the ultimate limit states.

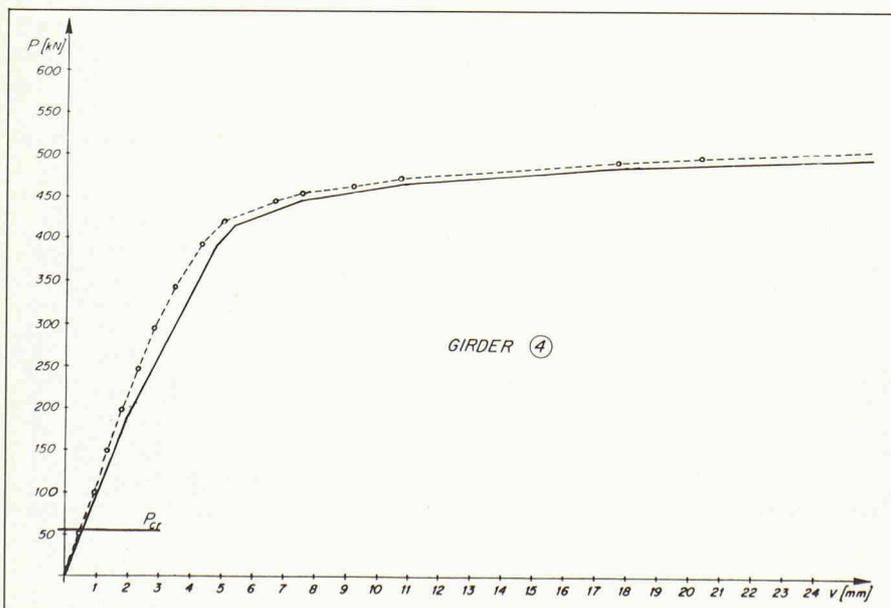


Fig. 8. — Numerical model versus test results.

#### References

- [1] ROCKEY, K. C., EVANS, D. M., PORTER, H. R., *The collapse behaviour of plate girders loaded in shear*. The Structural Engineer, vol. 53, 1975, n. 8.
- [2] BALLIO, G., MAZZOLANI, F. M., GALAMBOS, T. V., *Theory and design of steel structures*. Ed. Chapman and Hall, London, 1983.
- [3] MELE, M., *Sul dimensionamento delle nervature di irrigidimento d'anima nelle travi in acciaio*. Costruzioni Metalliche, nn. 4-5, 1973.
- [4] MELE, M., PUHALI, R., *Optimisation of stiffeners in thin-walled plate girders*. Acier, Stahl, Steel, n. 3, 1980.
- [5] BENUSSI, F., MELE, M., PUHALI, R., *On stability checks for transverse web stiffeners in bending and shear*. Costruzioni Metalliche, n. 3, 1984.
- [6] MELE, M., PUHALI, R., *The influence of collaborating web portions on the design of transverse stiffeners in thin-walled plate girders*. Tecnica Italiana, n. 6, 1982.
- [7] MELE, M., PUHALI, R., *Analisi sperimentale del comportamento post-critico di travi a parete piena irrigidita da nervature trasversali*. Costruzioni Metalliche, n. 6, 1978.
- [8] ROCKEY, K. C., VALTINAT, G., TANG, K. H., *The design of transverse stiffeners on webs loaded in shear*. Proc. Instn. Civ. Engrs., Part. 2, 1981, 71 Dec.
- [9] ROCKEY, K. C., EVANS, H. R., PORTER, D. M., *The design of stiffened web plates — A state of art report*. Proc. Cardiff Conference: The new code for the design of steel bridges. March 1980.
- [10] BENUSSI, F., MELE, M., PUHALI, R., *Shear strength of thin-walled girders with stiffened flanges*. Proc. Conf. on Instability and Plastic Collapse of Steel Structures, Edit. Morris L. J., Granada Publishing Lim., 1983.
- [11] BENUSSI, F., MELE, M., PUHALI, R., *Ultimate behaviour of plate or box girders with stiffened flanges*. Costruzioni Metalliche, to be published.

When orthotropic plates are used as flanges, the behaviour of the girder can be closely predicted by a numerical method using linear finite elements which allow for the contribution of the rigidity of the flanges.

At present further numerical investigations are in progress in order to achieve simple formulas which would enable us to extend the "Trieste Method" to the most general case of stiffened flanges avoiding the use of the finite elements method in practice.

#### Authors:

Michele Mele, prof. ing.  
Professor of Strength of Materials  
Department of Structural Engineering  
University of Rome (Italy)

Roberto Puhali, prof. ing.  
Professor of Strength of Materials  
Department of Civil Engineering  
University of Trieste (Italy)