

Zeitschrift: Helvetica Physica Acta
Band: 59 (1986)
Heft: 4

Artikel: A computer controlled analysis of a polarized ion source
Autor: Brink, W. ten
DOI: <https://doi.org/10.5169/seals-115739>

Nutzungsbedingungen

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

Conditions d'utilisation

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

Terms of use

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

Download PDF: 23.02.2026

ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>

A COMPUTER CONTROLLED ANALYSIS OF A POLARIZED ION SOURCE

W. ten Brink

Institut für Theoretische Kernphysik der Universität Bonn
Nussallee 14-16, D-5300 Bonn 1, Fed. Rep. of Germany

S. Kuhn, P.D. Eversheim, J. von König, F. Hinterberger

Institut für Strahlen- und Kernphysik der Universität Bonn
Nussallee 14-16, D-5300 Bonn 1, Fed. Rep. of Germany

ABSTRACT

A method is described to analyse the operation and efficiency of the polarization determining components of a polarized ion source.

The method is discussed for a ground-state polarized ion source. Examples are given how to infer an insufficient vacuum or an insufficient function of 6-pole-magnets or transition units from a computerized measurement and analysis.

1. Introduction

For new developed polarized ion sources it is desirable to find out to which extend the various components limit the polarization. Since the polarized ion source developed at Bonn [1] comprises a Penning-type ioniser [2,3] with a superconducting magnet, interest arose to study the influence of the stray-field of the superconducting magnet on the operation of the 6-pole-magnets and transition units. For this reason a computer controls a dedicated measurement, the data acquisition, and uses for the interpretation of these data a linear model, by which the various components are described [4].

In the following, this linear model and measurements are discussed for a polarized proton beam of a ground-state polarized ion source.

2. The Method

One of the advantages of the Bonn Polarized Ion Source is that the 4 polarization generating components (two 6-pole-magnets and two transition units) can arbitrarily be put together. It turned out that for the intended kind of measurement the combinations S_1 or S_2 of Fig. 1 allows for a maximum of information. Since, for combination S_1 or S_2 both transition units are topped by a second (compressor) 6-pole-magnet, switching these transitions on and off, results in a loss of intensity and a change in polarization. Considering now that all 4 relevant components are allowed to be switched on and off, leads to 16 possible states of the combination of these components and to 32 measured quantities, because intensity and polarization are measured for each state.

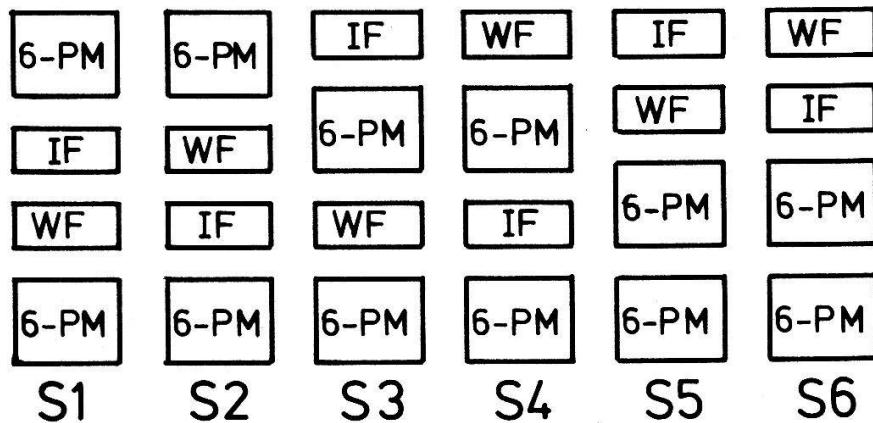


Fig. 1 Combinations of the polarization determining components. IF,WF: intermediate- and weak-field transition, 6-PM: 6-pole -magnet

expressed by:

$$I = i_1 + i_2 + i_3 + i_4 \quad (1)$$

$$P_y = \frac{i_1 + i_4 - i_2 - i_3}{i_1 + i_2 + i_3 + i_4} \quad (2)$$

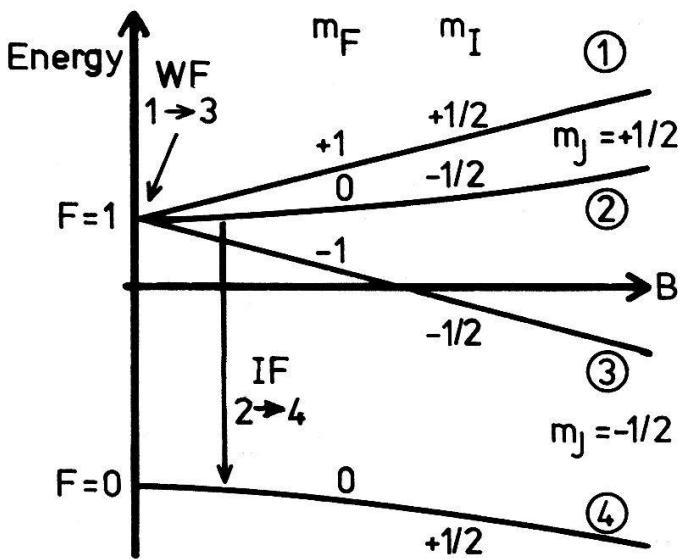


Fig. 2 Hyperfine structure splitting of hydrogen in a magnetic field B. The combined angular momentum of the nucleus(I) and electron(J) is indicated by F. The magnetic quantum number by m.

In order to interpret and extract relevant quantities out of these measurements, the beam is described by a vector \vec{I} built up by 4 components $i_1 - i_4$ which stand for the intensities found in each of the hyperfine components, as shown in Fig. 2. The intensity I and polarization P_y can then be

The beam transport through a polarization-changing element is described by a matrix. Within the frame of a linear model, the change in occupation of the hyperfine components, while passing various elements, is then described by a multiplication of the relevant matrices.

Up to now, nothing has been said about background. Since background is assumed to be unpolarized it is included in eq. (1,2) in the following way:

$$I = i_1 + i_2 + i_3 + i_4 + u \quad (3)$$

$$p_y = \frac{i_1 + i_4 - i_2 - i_3}{i_1 + i_2 + i_3 + i_4 + u} \quad (4)$$

The background u can be split up into two parts:

$$u = u_v + u_a \quad (5)$$

where u_v describes effects due to bad vacuum and u_a takes into account the fact that the ionizing condition and efficiency may change with a varied intensity of the atomic beam. The amount of u_v is tested by switching off the gas supply and the disso- ciator oscillator.

3. Description of the Components

The 4 polarization generating components of the polarized ion source are described by four types of 4×4 matrices with respect to the transfer of the intensities $i_1 - i_4$. Two different matrices represent the weak-field(WF) transition and the intermediate-field(IF) transition and two types of matrices represent the on- and off-state of a 6-pole-magnet. Out of the 32 measured quantities only 15 turn out to be linearly independent and allow the calculation of the following 12 parameters:

$f_{1/2}$, $d_{1/2}$ are the factors by which the hyperfine structure components of Fig. 2 with respect to the quantum number m_J of the electron-spin are focused or defocused in the 6-pole-magnet 1 or 2.

$g_{1/2}$ stands for the fraction of beam that passes 6-pole-magnet 1 or 2 if it is switched off. Therefore, these factors depend only on the aperture and length of a 6-pole-magnet and its adjustment with respect to the atomic beam.

$I \cdot f \cdot f_1 f_2$ is the part of the current that is focused by the 6-pole-magnets.

u_v is the background due to bad vacuum.

u_a reflects changed ionizing conditions when the intensity of the atomic beam is changed.

Z describes the transition probability ($2 \rightarrow 4$) of the IF.

Ω represents the probability of the wanted ($1 \rightarrow 3$) and Λ of an unwanted ($3 \rightarrow 2$) transition of the WF.

Figure 3 shows how the polarization depends on Ω and Λ if the background $u = 0$. Note, for $\Lambda > 0$ the polarization may even have the wrong sign!

4. Results and Discussion

Measurements showed that the operation of the 6-pole-magnets is not influenced by the superconducting magnet. The suppression factor (d/f) of the wrong components is 5% for each 6-pole-magnet. The transition probability Z of the IF is with $Z > 96\%$ satisfactory, if the stray-field of the supercon-

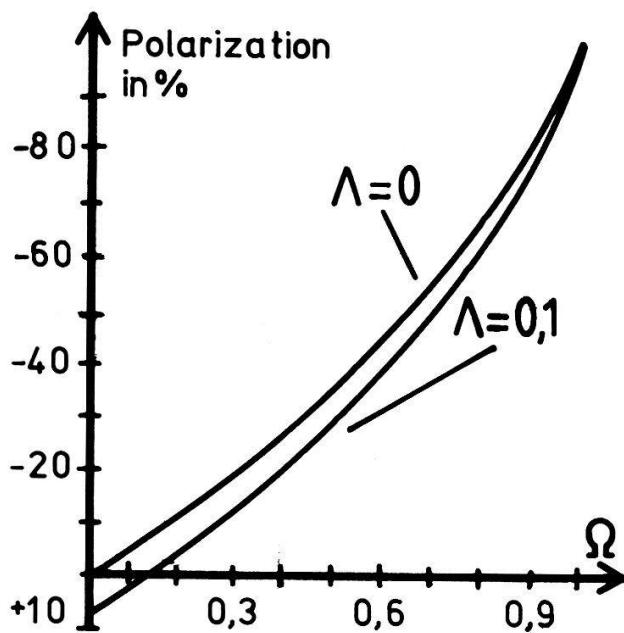


Fig. 3 Polarization of the WF calculated from the transition probabilities Ω ($1 \rightarrow 3$) and Λ ($3 \rightarrow 2$). Everything else is assumed to work perfectly.

ducting magnet is compensated for. This is better demonstrated for the WF by Fig. 4. For a compensating current of 3 A Ω is sufficiently high, whereas Λ could be smaller. A better screening of the superconducting magnet will improve the conditions for the transition units.

With this method even other qualities may be examined. Figure 5 shows how the polarization, Ω , and Λ of the WF depend on the applied RF-amplitude. Compared to Fig. 3 the Ω and Λ values of Fig. 5 result in a polarization being too small. Recalling that Fig. 3 was calculated without taking into account any background implies that the vacuum is too bad. Improving the vacuum by a factor of 3 increases

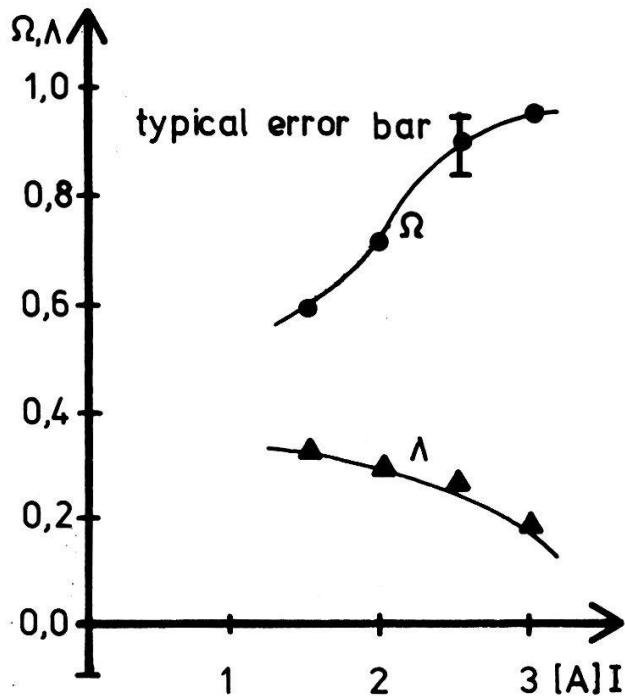


Fig. 4 The transition probabilities Ω and Λ are influenced by a current I , compensating a stray-field.

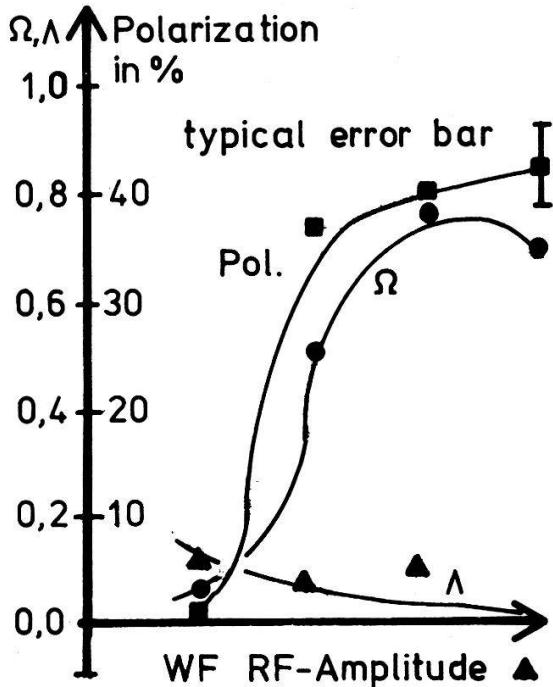


Fig. 5 The transition probabilities Ω , Λ and the polarization depend on the RF-amplitude applied to the WF.

the polarization by 20-30%!

These results show that the method developed is an adequate tool to analyse polarized ion sources. Moreover, the method as such is not limited to the conditions, the examples and discussion in this paper refer to.

5. References

- [1] H.-G. Mathews, A. Kruger, S. Penselin and A. Weinig, The new high intensity polarized proton and deuteron source for the Bonn Isochronous Cyclotron, *Nucl. Instr. and Meth.* 213 (1983) 155
- [2] A. Kruger, H.-G. Mathews, S. Penselin and A. Weinig, Ionization of a polarized deuterium beam in a penning discharge, *Nucl. Instr. and Meth.* 138 (1976) 201
- [3] A. Kruger, Dissertation Bonn (1979) (unpublished)
- [4] W. ten Brink, Diploma Thesis Bonn (1985) (unpublished)

See also rapporteur's report, Session (J), E. Huttel.