

Zeitschrift: Helvetica Physica Acta
Band: 62 (1989)
Heft: 6-7

Artikel: Diffuse layer electrical parameters at metal water interface in the 0.01 Hz to 100 KHz range
Autor: Grasso, F. / Musumeci, F. / Triglia, A.
DOI: <https://doi.org/10.5169/seals-116087>

Nutzungsbedingungen

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

Conditions d'utilisation

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

Terms of use

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

Download PDF: 23.02.2026

ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>

DIFFUSE LAYER ELECTRICAL PARAMETERS AT METAL WATER INTERFACE
IN THE 0.01 Hz TO 100 KHz RANGE

F. GRASSO, F. MUSUMECI, AND A. TRIGLIA

Istituto di Fisica, V.le A. Doria 6, I-95125 Catania, Italy

Dipartimento di Fisica, C.so Italia 57, I-95129 Catania-Italy

Abstract: The impedance of a water filled cell has been measured in the 0.01 Hz to 100 KHz and in the 5°C to 80°C range. The capacitance and resistance of the diffuse layer is reported.

1. Introduction

To study the behavior of an ideal polarizable liquid-electrode interface can be used a model, proposed by Gouy, Chapman and Stern (GCS) (1) and recently validated (2), which consider the interface as made up of two layers: the Helmholtz layer, and the diffuse charge layer. The behavior of the diffuse charge layer, in opposition to that of the Helmholtz layer, is not well known though it could give some informations on the dielectric properties of the solution at low frequency.

2. Experimental results

The experimental setup here adopted consists of a series RZ circuit, Z being the impedance of the cell containing the liquid and R a load resistor, driven by a sinewave signal. The cell impedance is obtained from the measurements of the signal attenuation and phase shift. The sample water is Analar by BDH. The measure cell filled up of water can be described by five parallel R-C meshes connected in series referring to the two Helmholtz layers, to the two diffuse layers and to the bulk water. In our conditions it is possible, from the measured impedance vs frequency, to obtain the value of capacitance and resi-

stance of each circuit element. The results of the elaboration are shown in Fig. 1a) and 1b) and in Fig. 2a) and 2b), which report respectively the resistance R_d and capacitance C_d of the diffuse charge layer vs signal frequency and vs sample temperature.

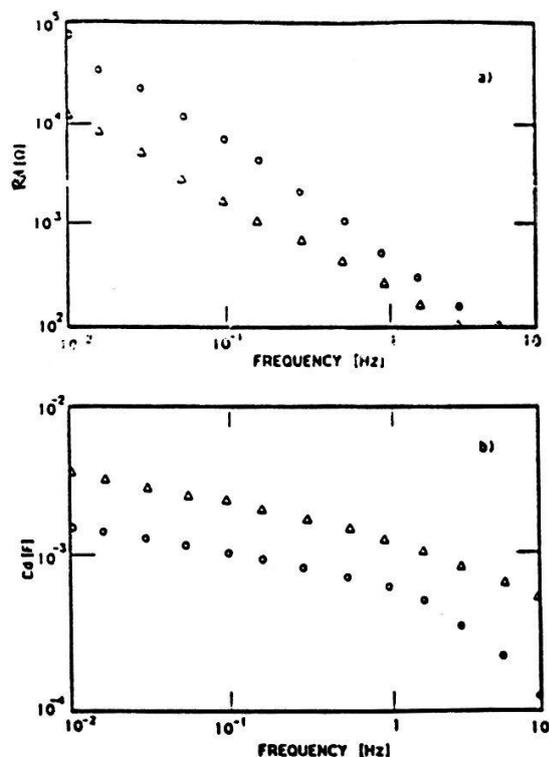


Fig. 1 - Calculated resistance (a) and capacitance (b) of the diffuse layer vs frequency at two temperatures:

5 °C (o) and 80 °C (Δ).

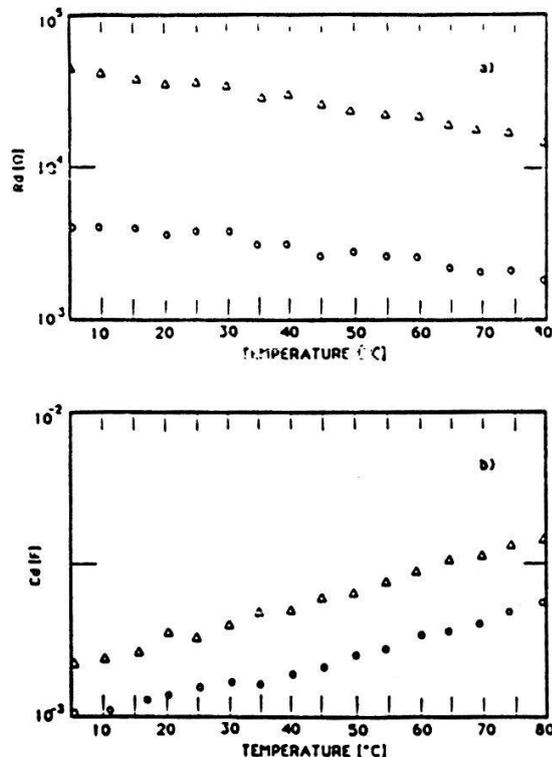


Fig. 2 - Calculated resistance (a) and capacitance (b) of the diffuse layer vs temperature at two frequencies:

0.01 Hz (Δ) and 0.1 Hz (o).

The results do not agree with the CGS theory, though the experimental conditions are within its validity range. So it is necessary to postulate an anomalous dependence of water dielectric constant and of the ion number near interface from both signal frequency and sample temperature. We are carrying out further studies to go deep into this question.

4. REFERENCES

- 1) G. Gouy, *J. Physique* 9, 457 (1910); D.L. Chapman, *Phil. Mag.* 25, 475 (1913); O. Stern *Z. Elektrochem.* 30, 508 (1924).
- 2) A.A. Kornyshev et al, *Phys. Rev.* 25, 5244 (1982).