

Zeitschrift: Helvetica Physica Acta
Band: 62 (1989)
Heft: 6-7

Artikel: Bi-Sr-Ca-Cu-O laser deposited thin films : a comparison between resistivity and mamma response
Autor: Agostinelli, E. / Bohandy, J. / Kim, B.F.
DOI: <https://doi.org/10.5169/seals-116095>

Nutzungsbedingungen

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

Conditions d'utilisation

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

Terms of use

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

Download PDF: 07.08.2025

ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>

Bi-Sr-Ca-Cu-O LASER DEPOSITED THIN FILMS: A COMPARISON BETWEEN RESISTIVITY AND MAMMA RESPONSE.

E. Agostinelli*, J. Bohandy, B.F. Kim, W.J. Green, T.E. Phillips, F.J. Adrian and K. Moorjani; *ITSE-CNR, Roma, ITALIA; RMS-APL, The Johns Hopkins University, Laurel, MD, USA

Abstract: Bi-Sr-Ca-Cu-O thin films were deposited by Laser Ablation on a number of oriented single-crystal substrates. The films were composed of a single superconducting phase with transition ($R=0$) at $T=70$ K. The relation between phase purity and processing parameters was studied by ac-resistivity measurements and by the Magnetically Modulated Microwave Absorption (MAMMA) technique.

1. Introduction

Among many different approaches attempted for the deposition of high- T_c superconducting thin films, the Laser Ablation Process technique is emerging as a very good method for depositing systems with a certain degree of structural complexity like the high- T_c superconducting ceramics. One of the numerous advantages is the excellent control on the stoichiometry of the deposited films. The final quality of the film is critically dependent on deposition and post-deposition processing. In order to use these thin films for applications in microelectronic, the analysis of superconducting properties has to be performed using a highly sensitive, fast, non-destructive method. The MAMMA response compared to resistivity measurements, was proved [1] to be an ideal technique since it has an inherent high sensitivity and it allows to determine the average critical temperature of the whole system.

2. Results and discussion

Thin films with thickness of $1-2 \mu\text{m}$ were deposited using a single target with nominal composition $\text{BiSrCaCu}_2\text{O}_y$. The target showed a predominance of the

2212-phase. The substrate (crystalline ZrO_2 or MgO or SiO_2) was mounted in a vacuum cell and heated in the range $25^\circ\text{--}300^\circ\text{C}$ during the deposition. An excimer laser ArF (193 nm) with average pulse energy of 150 mJ and 10 pps was focalized on the target surface (focal spot size = 0.5 mm^2). The as-deposited films were amorphous and insulating. The crystallization of the superconducting phase was obtained after a few minutes annealing in air at high temperature. The annealing process is extremely critical [2] and a satisfactory phase purity was obtained only for a narrow range of temperature and duration of the heat treatment. The utility of using a global analysis of superconducting properties of the samples, like the one obtained by MAMMA measurements, is illustrated in Fig. 1. It is shown that the best phase purity (related to the width of the MAMMA peak) was obtained only for a few degree difference in the annealing temperature and for short annealing time.

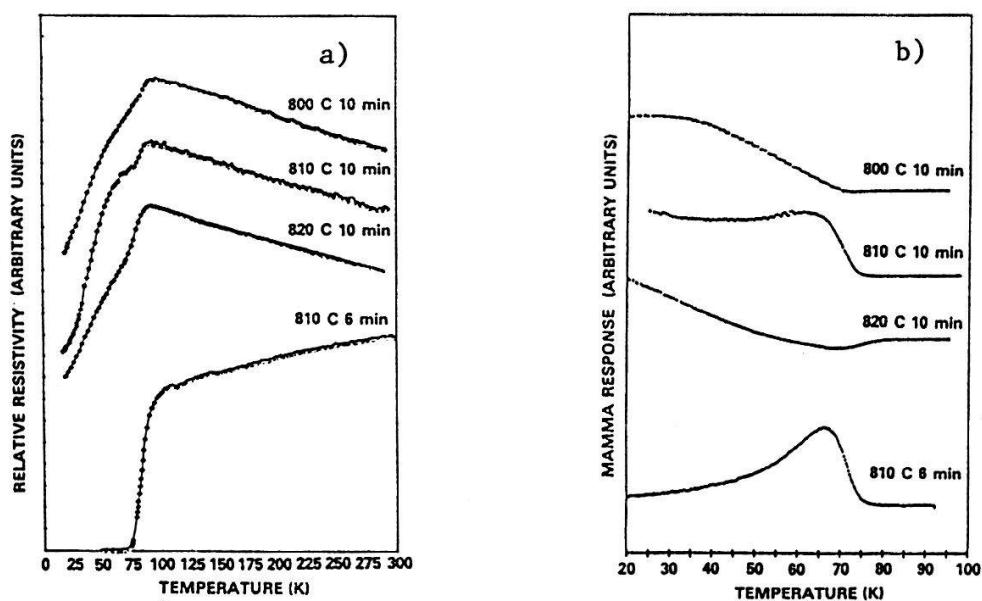


Fig. 1 - a) resistivity and b) MAMMA measurements for films deposited on unheated zirconia (from [2]).

3. References

- [1] B. F. Kim et al., J. Appl. Phys. 63, 2029 (1988)
- [2] B. F. Kim et al., Proc. TFS, Colorado 1988