

**Zeitschrift:** Schweizerische Bauzeitung  
**Herausgeber:** Verlags-AG der akademischen technischen Vereine  
**Band:** 89 (1971)  
**Heft:** 12

**Artikel:** Cavitation scale-effects in pumps  
**Autor:** Hutton, S.P. / Chivers, T.C.  
**DOI:** <https://doi.org/10.5169/seals-84803>

#### Nutzungsbedingungen

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

#### Conditions d'utilisation

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

#### Terms of use

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

**Download PDF:** 23.07.2025

**ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>**

Das weiterentwickelte Ausführungsprojekt des Hochwasserschutzbeckens Orden wird vom Ingenieurbüro Maggia in [14] beschrieben. Als Talabschluss dient eine Bogenstaumauer von 40 m Höhe, 180 m Kronenlänge und 10 m Basisstärke (Bild 6b). Der Grunddurchlass weist einen Durchmesser von 1,60 m auf und wird auf der Einlaufseite durch einen vom Mauerfuss bis zur Krone hochgezogenen Grobrechen derart abgeschirmt, dass das Geschiebe durchgeht, dagegen Baumstämme, Wurzelstücke, Zweige usw. aufgehalten werden. Dieses bemerkenswerte Bauwerk soll in diesem Jahre vollendet werden.

Abschliessend danke ich dipl. Ing. Ch. Bischoff, Chef der Abteilung Fluss- und Wildbachverbauungen des Tiefbauamtes Graubünden, für seine Angaben über Orden und dipl. Ing. R. Sigg, Assistent im Institut für Hydromechanik und Wasserwirtschaft der ETHZ, für die Durchführung der entsprechenden graphischen Retentionsrechnung.

#### Literaturverzeichnis

- [1] Curti, P.: Über Seeretention, Hochfluten und das Problem konstanter Wasserführung. Promotionsarbeit, Raastein Zürich, 1911
- [2] Schnyder, O.: Druckstöße in Pumpensteigleitungen. «Schweizerische Bauzeitung», Bd. 94, (1929) Nr. 22 und 23
- [3] De Juhasz, K.J.: Graphical Analysis of Transient Phenomena in Linear Flow. «Journal of the Franklin Institute», Vol. 223, April, May, June 1937
- [4] Bergeron, L.: Méthode graphique générale de calcul des propagations d'ondes planes. «Mémoire de la Soc. des Ing. Civils de France». Bulletin Juillet, Août 1937
- [5] De Juhasz, K.J.: Graphical Analysis of Transient Phenomena in Industrial Processes. «Instruments», Vol. 16, Aug. 1943
- [6] Bergeron, L.: Du coup de bâlier en hydraulique au coup de foudre en électricité, Paris 1950, Dunod
- [7] Sorenson K.E.: Graphical Solution of Hydraulic Problems. «Proceedings of the American Society of Civil Engineers», Vol. 78, Feb. 1952
- [8] Paynter, H.M.: Methods and Results from M.I.T. Studies in Unsteady Flow. «Journal of the Boston Society of Civil Engineers», Vol. 39, April 1952
- [9] Paynter, H.M.: How to Analyze Control Systems Graphically. «Control Engineering», Feb. 1955
- [10] Bock, G.: Der Ingenieur der Praxis und die Seeretention. «Wasserwirtschaft-Wassertechnik», 12 (1962), H. 3
- [11] Gregori B. und Hitz H.: Generelles Projekt für die Verbauung der Orlegna und Maira im Bergell von Plancanin bis Vicosoprano mit Retentionsbecken in Orden. Projekt z.H. Tiefbauamt GR, Dez. 1964
- [12] Peter, Y.: A Short Cut in Flood Routing. «Water Power», May 1965
- [13] Press, H.: Anwendung elektronischer Rechenverfahren in Hydrologie, Wasserwirtschaft und Wasserbau. Berlin 1968, W. Ernst & Sohn
- [14] Maggia, Ingenieurbüro: Staumauer zum Hochwasserschutz eines Alpentales. «Schweizerische Wasserwirtschaftsverbandsschrift», Nr. 42, 1970
- [15] Vischer, D.: Die stetige Regelung eines Flüssigkeitsstandes. «Technische Rundschau», Nr. 53, 18. Dez. und Nr. 54, 24. Dez. 1970.

## Cavitation Scale-effects in Pumps

By S. P. Hutton<sup>1)</sup>, D. Eng., Ph. D., and T. C. Chivers<sup>2)</sup>, Ph. D.

<sup>1)</sup> Professor of Mechanical Engineering, University of Southampton, England

<sup>2)</sup> Berkeley Nuclear Laboratories Central Electricity Generating Board, Gloucestershire, England

#### Notation

$C_{m2}$	Radial velocity at impeller exit
$C_p$	Specific heat of liquid at constant pressure
$g$	Gravitational constant
$H$	Pump developed head
$H_e$	Ideal Euler head
$h_{fg}$	Latent heat of vapourization
$J$	Mechanical equivalent of heat
$Kr$	Non-dimensional parameter defined as
	$\frac{J h_{fg} v_f}{v_g^2 C_p T P_s}$
$n$	Reynolds number exponent
$NPIH$	Net positive inlet head; i. e. upstream total head minus vapour pressure head
$NPIH_i$	$NPIH$ at inception
$NPIH_b$	$NPIH$ at breakdown
$\Delta NPIH$	$NPIH_b - NPIH_i$
$Pr$	Prandtl number
$P_{at}$	Atmospheric pressure
$P_s$	Equilibrium vapour pressure
$Q$	Volumetric flowrate
$Re$	Reynolds number
$r_f$	Reciprocal of liquid specific gravity
$r_v$	Vapour to liquid volume ratio
$T$	Temperature
$u_2$	Circumferential velocity at impeller exit
$v_f$	specific volume of liquid

$v_g$	specific volume of vapour
$\Phi_2$	Impeller blade angle at exit
$\phi$	Flow coefficient
$\psi$	Head coefficient
$\sigma$	Thoma Cavitation coefficient $\sigma = NPIH/H$
$\sigma_c$	Critical Cavitation coefficient $\sigma_c = NPIH_b/H$ (at breakdown)

#### Introduction

For many years the Thoma cavitation coefficient  $\sigma$  has been widely used for correlating the cavitation performance of water turbines and pumps. For pumps  $\sigma$  is a dimensionless index of the margin between the vapour pressure and the pressure at inlet to the pump. This margin is often called *net positive suction head (NPSH)* or as we prefer to call it the *net positive inlet head (NPIH)* and is made dimensionless by dividing by the *cavitation free pump head*,  $H$ , to give  $\sigma = NPIH/H$ . The critical value,  $\sigma_c$ , may be defined in several ways such as the value of  $\sigma$  when the pump head (or efficiency) breaks down completely ( $\sigma_c = NPIH_b/H$ ) or when the head (or efficiency) decreases say 3 % from its cavitation free value. For convenience it is often easiest to use the breakdown point for head as giving the most clearly defined value of  $\sigma_c$ .

However it has become increasingly obvious that the applicability of  $\sigma_c$  as a scale parameter is restricted to water over a narrow range of temperatures. For example when compared on a  $\sigma_c$  basis, a pump delivering water at 150 °C will have a better cavitation performance than the same pump handling water at 15 °C. Similarly the same pump when pumping kerosene will have a better cavitation per-

formance in terms of  $\sigma_c$  than when it is pumping cold water. Generally speaking apart from mercury and the liquid metals, water gives the worst cavitation performance of all liquids whereas liquid hydrogen is particularly good. Such differences in  $\sigma_c$  can possibly be explained by the different thermal properties of fluids and their influence upon cavitation bubble growth. Although such effects on  $\sigma_c$  can be allowed for empirically it is desirable to find a basic theory which will explain such behaviour and some new cavitation parameter which will take account of thermal influences. At the moment there is no generally accepted explanation nor any generally applicable method of correlating pump performance for various liquids.

In practice the changes in  $\sigma_c$  are often of economic importance when deciding upon  $NPIH$  and the siting of pumps in a system. A particularly difficult problem is the siting of liquid metal pumps in a nuclear power-station cooling system because the correct choice of  $NPIH$  has an important influence upon the excavation required for the pumps and thus upon the civil engineering costs. It may also be of importance in deciding upon the running speed and inlet conditions for a boiler feed pump.

This paper reviews research into the basic problem directed by the senior author over recent years. In addition to theoretical studies and comparisons with published literature tests have been made on a small 25 H.P. pump [ $N_s$  (British) = 1000] over a range of speeds from 900 to 2500 r.p.m. These tests and the specially designed cavitation circuit have been described by T. C. Chivers [1]. The original object of the research was to analyse the validity of making pump tests with cold water and applying the results to other conditions. It was also hoped to compare the various methods of correlation suggested so far and if possible to establish a new parameter for general application to all pumps and liquids. So far experimental results have only been obtained using water, but its thermal properties have been varied by testing at temperatures from 0—150 °C. A theoretical cavitation model [1], [2] has been produced by T. C. Chivers, which was successful in predicting the pump's cavitating behaviour over the temperature range tested. This theoretical model was then developed to cover the problem of a general pump correlation [1], [3] and has been successfully applied to test data obtained by other people.

There are however, two reservations which must be made:

1st) although the predictions were often successful for one particular pump, the investigation showed that conclusions regarding correlation for pumps in general cannot be made from one pump.

2nd) whilst the developed parameter correlates the results examined its evaluation requires extensive data on fluid properties, which at present restricts it to pure liquids.

### Theories of Cavitation

In recent years two review papers [4], [5] have appeared on the general subject of cavitation correlation in pumps. It is obvious from these papers that the majority of published work on this subject has been based on the "thermal approach", and this will be discussed later.

Another approach to the problem is to consider acoustic phenomena. If small quantities of vapour are present in a liquid then the sonic velocity in the fluid can be very low, and since the mass flow rate through a converging diverging nozzle becomes choked when sonic velocity is reached at the throat, then an analogy can be made between this phenomenon and that of breakdown

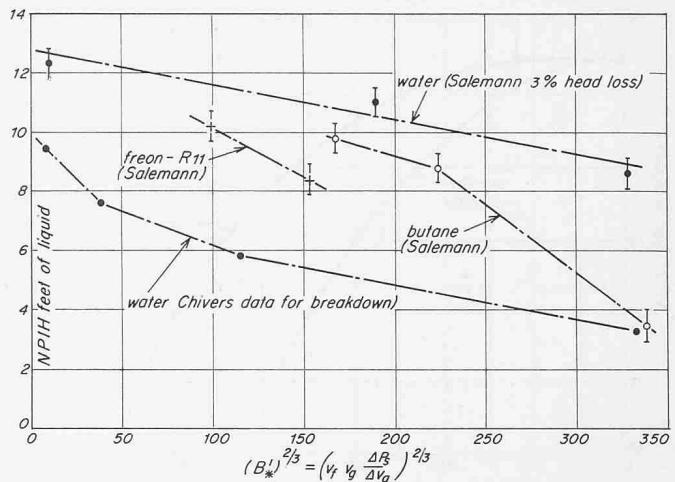


Fig. 1. Experimental results plotted against Jacobsen's parameter  
The vertical lines represent the experimental scatter of the test results

(i.e.  $dH/dQ = -\infty$ ) in a centrifugal pump under cavitating conditions.

This idea of sonic velocities influencing cavitating performance in machines is not new; reference [6] considers this aspect, but more recently J. K. Jakobsen [7] derived a correlation parameter,

$$B_*' = v_f v_g \frac{\Delta P_s}{\Delta V_g}$$

whilst W. A. Spraker [8] showed statistically that acoustic phenomena could be influential in the correlation of pump performance.

J. K. Jakobsen derived a linear relationship between  $NPIH$  and his parameter, and showed excellent correlation at design point between water and liquid oxygen data. However, if Salemann's pump data [9] for various liquids are used then correlation is not obtained (Fig. 1). Further, the various authors' data for breakdown conditions do not result in a linear relationship between  $NPIH$  and Jakobsen's parameter.

The calculation of acoustic velocities in reference [7] is based on thermal equilibrium between the vapour and liquid phases and a uniform distribution of bubbles in the liquid. Following this approach T. C. Chivers calculated the critical vapour to liquid volume ratio which would result in sonic velocity being reached at the inlet to his test pump. It was found that large vapour-to-liquid volume ratios (5:1) are required for sonic velocities at higher temperatures (150 °C). This increasing trend with temperature can be interpreted as giving qualitative correlation with actual results in that at low temperatures (15 °C) breakdown occurs close ( $NPIH$  wise) to "inception" and could be associated with small vapour-to-liquid volume ratios (0.03). As temperature increases so the change in  $NPIH$  between "inception" and breakdown increases, and this could be associated with the development of increased vapour volumes before sonic choking was obtained. When breakdown is initially reached, cavitation is expected to be localized at impeller inlet, and to spread through the pump as the developed head reduces; when this head is zero then the flowrate is a maximum. Under such maximum flow conditions it may not be unreasonable to assume that the cavitating mixture does not change materially whilst passing through the pump, in which case the maximum  $r_v$ -value can be estimated.

The ideal Euler characteristic for Chivers' pump gives  $\phi = \operatorname{tg} \beta_2$  for  $\psi = 0$  and for the pump in question  $\phi_2$  is 31.4°. Therefore  $C_m^2/U_2 = 0.61$ .

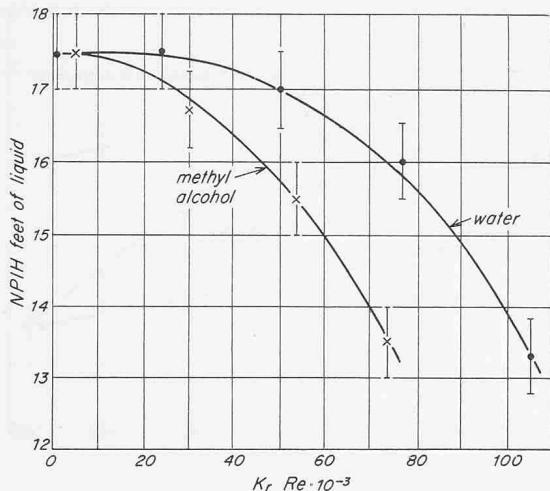


Fig. 2. Data from Spraker's pump 5, plotted against Barenboim's parameter

Considering a speed of 2000 r.p.m. it is found that the maximum flowrate is 76 l/s, and for the best efficiency flowrate in the non-cavitating section it is found that  $r_v \text{ max} = 4.95$ . This value shows that, according to the assumptions made, if the cavitation mixture is homogeneous, breakdown should not occur in the pump characteristic above  $135^\circ\text{C}$ .

In practice, the pump characteristic is below the Euler line, hence the limiting  $r_v$ -value would be less than that calculated. However, breakdown has been obtained in the pump characteristic at temperatures of  $150^\circ\text{C}$ , and this fact would discredit the acoustic theory as presented.

A basic assumption in the argument was that the vapour and liquid phases were in thermal equilibrium; this is certainly not so, as the liquid phase must be superheated relative to the vapour phase. If now the sonic velocity which coincides with the breakdown condition at  $150^\circ\text{C}$  is calculated, then  $15^\circ\text{C}$  superheat of the liquid phase is required. This represents a difference of 16.8 m of water in equilibrium pressures, and demonstrates that thermal equilibrium between the two phases cannot be assumed.

The information available is insufficient to form conclusions on the role of acoustic phenomena in the cavitation process, but it may be concluded that calculations based on thermal equilibrium are not valid.

Another approach to the problem of correlation was made by A. B. Barenboim [10], who made a complex dimensional analysis of the problem. Then using a process of elimination found the best correlation of Salemann's data when:

$$(1) \quad NPIH = F(Kr \cdot Re)$$

where Barenboim's parameter is

$$(2) \quad Kr = \frac{J h_f g^2 v_f}{v_g^2 C_p T P_s}$$

However if the data obtained by W. A. Spraker [11] are plotted against Barenboim's parameter  $Kr$  then correlation is not obtained: The test points of water and methyl alcohol in fig. 2 do not lie on one unique curve. Hence, both Jakobsen's and Barenboim's parameters would appear not to be generally applicable, and this demonstrates that general conclusions cannot be drawn from test data obtained from one pump only.

A new approach to the problem of cavitation has been made by T. C. Chivers, and his proposed model, described in the next section, has been successful in predicting the behaviour of the particular pump tested. However, this

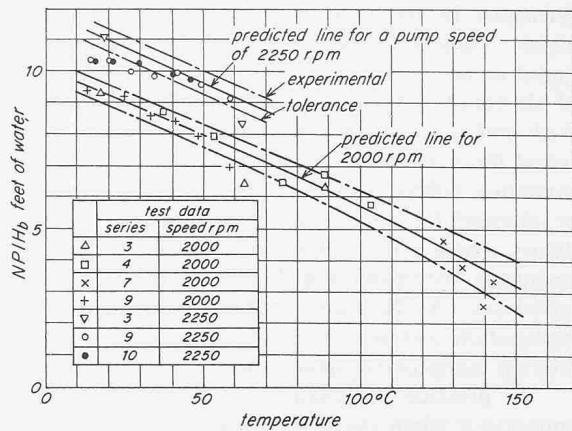


Fig. 3. Comparison between the predicted variation of  $NPIH_b$  with temperature and test data

success must be tempered by the comment made above regarding the drawing of general conclusions from tests on a single pump.

#### A Model for Cavitation in a Pump

When considering the effect of cavitation on the performance of centrifugal pumps the general assumption is made that similar performance should result for similar vapour to liquid volume ratios ( $r_v$ ) irrespective of the fluid or its temperature. Further when examining correlation, a universal parameter is sought which considers fluid properties but ignores geometric parameters (for example reference [11]). It would seem that these assumptions cannot be substantiated. A centrifugal pump is essentially a volumetric flow/head generating device, and is capable of handling gas or liquid and producing substantially the same characteristics (there are of course Reynolds number effects). Hence it would appear reasonable to expect a centrifugal pump to behave normally when handling a uniform mixture of gas and liquid, that is when cavitating. This means that one has to consider fluid density in the cavitating region as the primary variable, and this can only be evaluated from energy considerations in their widest sense and not simply from thermal aspects. Accurate determination of the density of a two-phase fluid is extremely difficult and such a measurement in a centrifugal pump impeller has not yet been attempted. Hence assumptions have to be made regarding the cavitation process. Following the photographic work of E. Grist [12], it appeared that, for the pump in question, when operating at the best efficiency point the cavitation process could be regarded as one of bubble growth. However, the use of bubble growth theory is restricted in that the initial radius and the number of bubbles are required before fluid density can be calculated.

However from energy considerations, and simply obtained pump test data, it is possible (making assumptions [2]) to arrive at a vapour to liquid volume ratio at a particular temperature. If now it is assumed that bubble nuclei are usually present in the liquid stream; that their initial radius does not change with temperature (this is probably reasonable in a de-aerated liquid); and that the number of nuclei remains constant, then it is possible to estimate the vapour to liquid volume ratio at any other temperature. The actual calculations involved require that some assumptions be made regarding bubble growth, because the actual bubbles are growing and collapsing in an undefined pressure (or superheat) field. This problem can be sidestepped by considering a mean bubble growth rate which

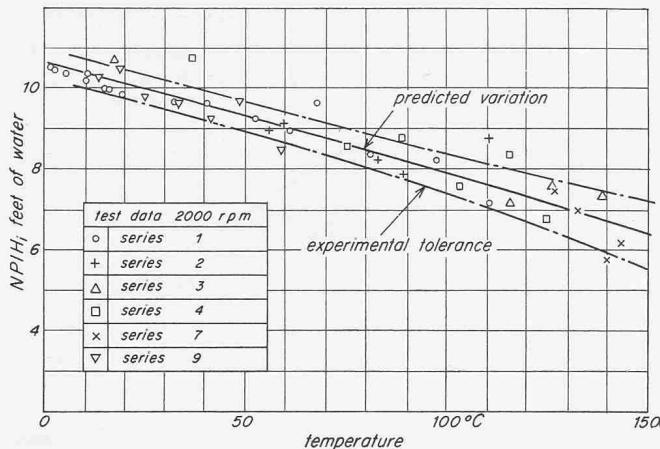


Fig. 4. Inception data compared with the predicted variation with temperature

is simply proportional to the Rayleigh [13] solution, which is proportional to time. The assumption is then made that the proportionality between the actual mean growth rate and the Rayleigh solutions does not vary with temperature. This assumption cannot really be substantiated, other than by Chivers' final result that the test data agreed with his predictions (Figs. 3 and 8).

Figure 3 shows the predicted variation of  $NPIH_b$  together with the experimental tolerance which can be reasonably expected from the test data, using temperature as abscissa. Two solid lines are drawn, both based on test results obtained at 2000 r.p.m. and  $16^\circ\text{C}$ . It is seen that at 2000 r.p.m. excellent agreement exists between the predicted results and the actual experimental data; whereas at 2250 r.p.m. the agreement is not so good below  $40^\circ\text{C}$ . The upper limit of  $60^\circ\text{C}$  at 2250 r.p.m. was dictated by instrumentation problems, and these would have to be overcome before experiments could be conducted to see if the agreement existing between  $40^\circ\text{C}$  and  $60^\circ\text{C}$  was continued at the higher temperatures. One anomaly which does arise is that at 2000 r.p.m. the results indicate no "plateau" (zero slope) in the  $NPIH_b$  - Temperature curve as found by others (Figs. 1 and 2 for example) (neither is one predicted), whereas at 2250 r.p.m. the experiments show such a "plateau". It is thought that this is a genuine effect, since the result at 2000 r.p.m. and 2250 r.p.m. were taken concurrently in test series nine, hence the instrumentation cannot be blamed.

The general arguments and assumptions which T. C. Chivers has used [1], [2] enable  $\Delta NPIH$  (the change in  $NPIH$  between inception and breakdown conditions) to be calculated ( $NPIH_i = NPIH_b + \Delta NPIH$ ). Hence  $NPIH_i$  can be calculated from  $\Delta NPIH$  and  $NPIH_b$ . The calculated line is shown in Figure 4, again with the experimental tolerance which can be expected from instrumentation errors; here the data scatter is quite large, but this can be reasonably expected since cavitation inception is not clearly defined from pump test data.

It should be noted that Fig. 4 contains test data from series one and two which has been included by adding the measured  $\Delta NPIH$  to the calculated  $\Delta NPIH_b$ , and it should be regarded as verifying the  $\Delta NPIH$  calculations rather than the calculation of inception conditions.

#### Correlation

The general success of this cavitation model was encouraging, and the problem of correlation seemed an ob-

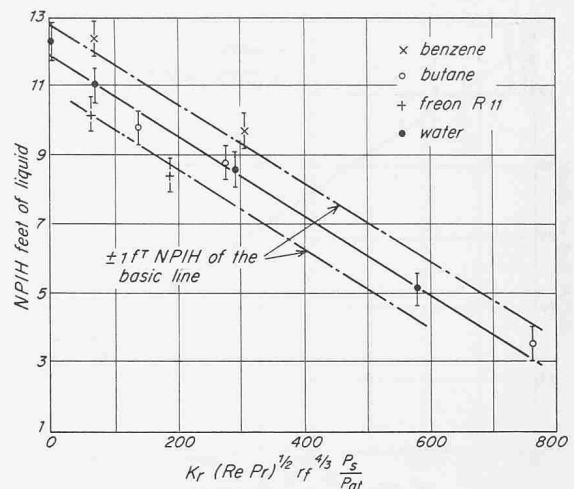


Fig. 5. Salemann's data plotted against the derived parameter [formula (3)]

vious extension. As developed the model assumed a proportionality between actual bubble growth and the Rayleigh solution and this constant will certainly vary with different liquids. Hence the problem was re-examined using the Plessset and Zwick [13] solution for the growth of vapour bubbles in superheated liquids. This led to the conclusion that cavitation performance for a particular pump could be expressed as:

$$NPIH = f \left\{ Kr (Pr Re)^{1/2} r_f^{4/3} P_s / P_{at} \right\}$$

This parameter was developed considering breakdown conditions, whereas the only experimental data available for various liquids is for a relatively small head decrease compared with cavitation free conditions. However Salemann's data [9] was correlated to 1 ft (0.3 m) on  $NPIH$ , Fig. 5 is typical but it is debatable whether it is any better than that using the thermal parameter  $1/\beta$ , Fig. 6. However when plotting Sprakers [11] data neither the derived parameter nor the thermal parameter give correlation although the latter is more successful. It is argued [3] that for the small decrease in head (3 %) due to the onset of cavitation, Reynolds number could possibly have a large influence on correlation, but with the present state of knowledge this is not calculable, in which case the parameter can be written as:

$$(4) \quad NPIH = f \left\{ Kr (Pr Re)^{1/2} r_f^{4/3} P_s / P_{at} \right\} Re^n$$

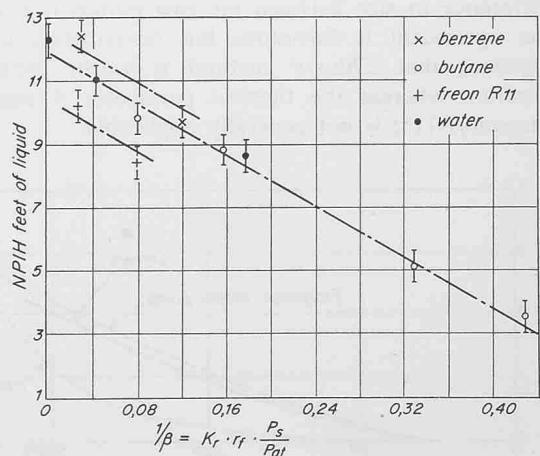


Fig. 6. Salemann's data plotted against the reciprocal of  $\beta$ , the thermal parameter

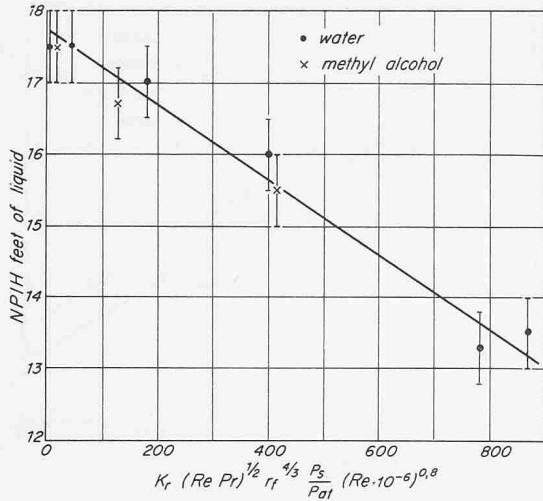


Fig. 7. Data from Spraker's pump 5, plotted against the derived parameter multiplied by Reynolds number to the power of 0.8

Here  $n$  will vary with both the degree of cavitation and the actual pump. Using this equation it is found that the correlation of Salemann's data is empirically improved if  $n = 0.4$ , whereas for both of Spraker's pumps if  $n = 0.8$  complete correlation results (Fig. 7). If  $n = 0.8$  is used with Salemann's data then the correlation is still an improvement over that obtained with  $n = 0$  (Fig. 8). Hence it is proposed that to give the best general correlation of the test data published so far the derived parameter should be multiplied by  $Re^{0.8}$ .

Chivers has not attempted a universal correlation in which all data, irrespective of pump, reduce to one line, for it is his opinion that cavitation cannot be divorced from the geometry of that which is cavitating. As yet the pertinent geometry is not defined, and the universal plotting of cavitation data is believed to be some way off.

It seems therefore that Chivers' derived parameter

$$(5) \quad Kr (Re Pr)^{1/2} r_f^{4/3} P_s / P_{at} \cdot (Re \cdot 10^{-6})^{0.8}$$

is worth further investigation as a correlation parameter for predicting changes in cavitation performance for a pump provided its duty at one temperature is known.

It is interesting to note that recent research by D. Florjancic [14] on a model boiler feed pump tends to confirm Chivers' method of prediction. As seen in Fig. 9 the agreement between  $NPIH$  calculated by Chivers' results and the experimental results is good. Because of the large difference in size between the two pumps it may be that the agreement is fortuitous but nevertheless it provides evidence that Chivers' method is worth further consideration whereas the thermal parameter  $\beta$  suggested by Stepanoff [15] is not generally applicable.

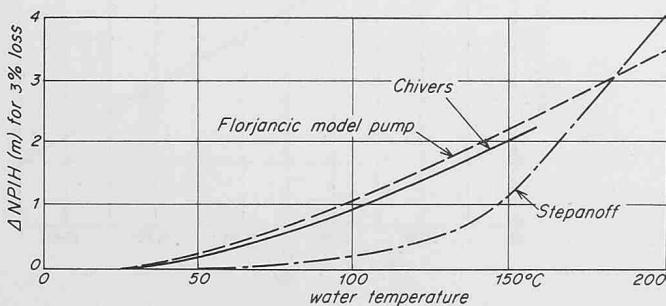


Fig. 9. Comparison of pump test results

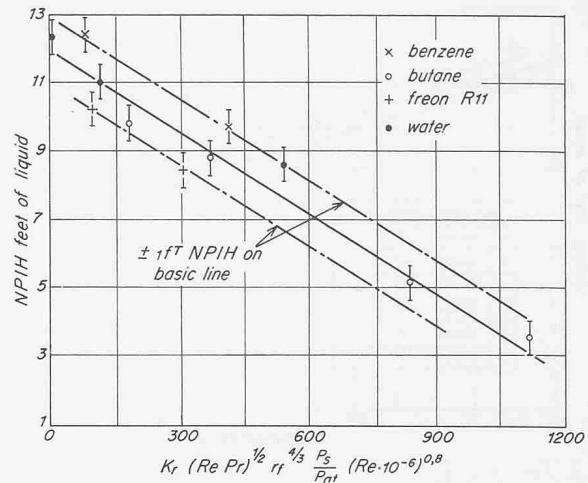


Fig. 8. Data from Salemann's pump 5, plotted against the derived parameter multiplied by Reynolds number to the power of 0.8

### Further research

The cavitation test circuit originally at Cardiff University has now been moved to Southampton University where after considerable improvement and modification it has been reassembled. Because of the difficulty of observing cavitation effects in a rotating impeller it was decided to include in the circuit a convergent-divergent test nozzle (two-dimensional) where cavitation could be more easily observed.

The area grading of the nozzle from the throat downstream was similar to that between the inlet and outlet of an impeller blade passage. The test section is liberally equipped with pressure and temperature measuring points and the cavitation from the throat downstream is easily visible.

Experiments so far by R. A. Furness show that the change with temperature of  $NPIH$ , based either on breakdown to 50% diffuser efficiency or on 3% loss compared with cavitation free conditions is similar to that found in the pump impeller and experiments are proceeding to establish the applicability of Chivers' method prediction applied to this idealized case.

It is clear that we must still await the development of a generally applicable cavitation parameter for pumps but that Chivers' method gives a way of calculating  $\Delta NPIH$  for any particular case.

### Acknowledgements

The author expresses his thanks to the Science Research Council and the Ministry of Aviation who sponsored this programme at various times and to Messrs. E. Grist, T. C. Chivers and R. A. Furness who carried out the research described.

### References

- [1] Chivers, T. C.: Cavitation research on a Centrifugal Pump. "Trans A.S.M.E. Paper" 69-FE-27 1969.
- [2] Chivers, T. C.: Temperature Effects on Cavitation in a Centrifugal Pump; Theory and Experiment. "Proc. Instn. Mech. Engrs.". Part 1, 1969.
- [3] Chivers, T. C.: The Correlation of Cavitating Performance for a Centrifugal Pump Handling Various Liquids. "Proc. Instn. Mech. Engrs.". Part 1, 1969.
- [4] Hutton, S. P.: Kavitationsparameter von Pumpen. 2nd Conference on Hydraulic Machines, Budapest, November 1966.
- [5] Ward, T. and Sutton, M.: A Review of the Literature on Cavitation in Centrifugal Pumps with Various Liquids. B.H.R.A. TN 892, April 1967.

- [6] German, V. L. and Azbel, M. Ya.: On the Hydrodynamics of a Cavitating Liquid. Russian original dated 1954. "A.C.S.I.L. Translation" No. 1059.
- [7] Jakobsen, J. K.: On the Mechanism of Head Breakdown in Cavitating Inducers. "Trans. A.S.M.E.". Series D. Vol. 86, June 1964.
- [8] Spraker, W. A.: Two-Phase Compressibility Effects on Pump Cavitation. Symposium on Cavitation in Fluid Machinery, A.S.M.E. November 1965.
- [9] Salemann, V.: Cavitation and NPSH Requirements of Various Liquids. "Trans. A.S.M.E.". Series D, Vol. 81, June 1959.
- [10] Barenboim, A. B.: Conditions for Modelling Cavitation Phenomena in Pumps for Refrigeration Liquids. "B.H.R.A. Transl. No. T865 Oct. 1966" (Russian original dated 1965).
- [11] Spraker, W. A.: The Effect of Fluid Properties on Cavitation in Centrifugal Pumps. "Trans. A.S.M.E.". Series E. Vol. 87, July 1965.
- [12] Grist, E.: The Correlation of Cavitation Characteristics of Centrifugal Pumps. University College, Cardiff, February 1965 (unpublished).
- [13] Plesset, M. S. and Zwick, S. A.: The Growth of Vapour Bubbles in superheated Liquids. "J. App. Phys.". Vol. 25 (1954), No. 4.
- [14] Florjancic, D.: «Experimentelle Untersuchungen an einer Pumpe zur Feststellung der Änderung der Saugfähigkeit durch Oberflächenrauhigkeit, durch Mischvorgänge auf Laufradeintritt und durch Heisswasserförderung». Dissertationsarbeit an der ETH Zürich, Nr. 4406.
- [15] Stepanoff, A. J.: Pumps and blowers two phase flow. Chapter I. London 1965, John Wiley & Sons Ltd.

## Le nouveau stand d'essai universel pour machines hydrauliques de l'École Polytechnique Fédérale de Lausanne

DK 061.6.62:621.224

Par Théodore Bovet, professeur à l'École Polytechnique Fédérale de Lausanne

### Préface

Voici bientôt sept ans – c'était au début du mois d'avril 1964 – que nous avons eu, ma femme et moi-même accompagnés de l'un de mes collaborateurs, la grande joie d'avoir été accueillis si chaleureusement au sein de la famille de Monsieur Charles-Louis Jaeger, à Rugby, en Angleterre. Notre voyage n'avait cependant pas pour seul but cette aimable rencontre; nous avions encore au programme la visite du laboratoire d'essais de machines hydrauliques de l'English Electric Company (EEC) où C.-L. Jaeger était ingénieur-conseil. Cette visite devait nous renseigner sur ce qui se faisait en dehors de notre pays, en prévision de l'étude et de la réalisation d'un nouveau stand d'essai à l'Institut de Machines Hydrauliques de l'Ecole Polytechnique de l'Université de Lausanne devenue, depuis le début de l'année 1969, l'Ecole Polytechnique Fédérale de Lausanne. Monsieur Jaeger a eu la grande amabilité de nous introduire auprès des responsables du département de recherches et d'essais en laboratoire de machines hydrauliques de l'EEC. Que la dette de grande reconnaissance que j'ai contractée envers mon cher et distingué collègue trouve aujourd'hui son acquittement par ce modeste hommage à son adresse.

### 1. Généralités

La désignation de *stand d'essai universel pour machines hydrauliques à réaction* se justifie du fait que, d'une part, ce stand unique permet d'essayer *n'importe quel type de machine hydraulique à réaction*, à savoir les turbines radiales Francis, turbines diagonales Dériaz, turbines axiales Hélice et Kaplan classiques, turbines axiales Hélice et Kaplan bulbes, pompes radiales, pompes diagonales Dériaz, pompes axiales Hélice et Kaplan, machines réversibles (pompes-turbines) et que d'autre part, ces huit types de machines hydrauliques peuvent être essayés aussi bien en *circuit ouvert* qu'en *circuit fermé*.

Pourquoi un pareil stand d'essai à l'Institut de Machines Hydrauliques (IMH) de l'Ecole Polytechnique Fédérale de Lausanne (EPFL)? Il y a plus de quinze ans, le soussigné a commencé une étude de *recherche sur la systématisation du tracé d'aubages de turbines Francis*, recherche qu'il entreprit d'abord seul puis, dès l'année 1964, avec l'aide financière du «Fonds pour l'encouragement par la Confédération des recherches scientifiques et techniques», secondé de l'aide technique, sous forme d'essais en laboratoires, des cinq principaux constructeurs suisses de machines hydrauliques (Bell, Charmilles, Escher Wyss, Sulzer et Vevey). Cette collaboration entre le Fonds, les construc-

teurs et le soussigné a fait l'objet d'une convention signée le 9 février 1966 à l'OFIAMT à Berne. En plus de la recherche sur les turbines Francis, la convention s'applique également à celle de toutes les autres machines hydrauliques à réaction, tant turbines que pompes.

L'IMH ne disposant pas, à ce moment-là, d'un stand d'essai adéquat, les essais effectués sur les différentes plates-formes des dits constructeurs étaient une précieuse contribution à la recherche puisqu'il fallait, le plus tôt possible, pouvoir vérifier par des résultats pratiques la théorie émise à la base du calcul des tracés d'aubage.

Mais en plus, en prévision d'un résultat final aussi précis et fidèle que possible, les ultimes essais devaient pouvoir se faire sur un seul et même stand donnant toute garantie quant à la précision des résultats, donc des mesures. C'est ainsi que fut décidée la création d'un nouveau stand d'essai à l'IMH répondant entièrement aux exigences requises.

L'effort financier considérable de 4,43 Mio fr. que demandait ce projet, tant en ce qui concerne le gros œuvre que le stand d'essai proprement dit – l'équipement du stand d'essai était devisé à 2 Mio fr., montant qui sera atteint mais pas dépassé – nécessitait l'aide de plusieurs bailleurs de fonds, dont la Confédération, le canton de Vaud, la commune de Lausanne, la Société d'aide aux laboratoires de l'EPUL et un certain nombre d'exploitants de centrales hydro-électriques de la Suisse romande et de la Suisse alémanique.

Cependant, la recherche à elle seule ne pouvait justifier un pareil investissement. Il fut décidé d'utiliser ce stand également pour des essais pour des tiers, à savoir pour des constructeurs de machines hydrauliques, pour des mandataires ou bureaux d'ingénieurs-conseils d'exploitants de centrales hydro-électriques, etc.

Il n'est pas possible, dans un cadre aussi restreint que celui du présent article, d'entrer dans les détails de tous les éléments constituant le nouveau stand d'essai. Une description très détaillée fait l'objet de la Publication No 6 de l'IMH qui vient de sortir de presse, en français et en anglais. Notre description se limitera donc aux éléments principaux du stand d'essai.

### 2. Description du stand d'essai

L'installation complète du stand d'essai est reproduite sur la figure 1. Elle comprend essentiellement les *circuits hydrauliques* proprement dits du stand, les *éléments principaux* de ces circuits, les *éléments auxiliaires*, la *plateforme d'essai*, élément principal du stand. Nous traiterons dans cet ordre ces différentes parties de l'installation.