**Zeitschrift:** Swiss express: the Swiss Railways Society journal

Herausgeber: Swiss Railways Society

**Band:** - (2009)

**Heft:** 98

**Artikel:** Golden Pass to Interlaken?

Autor: [s.n.]

**DOI:** https://doi.org/10.5169/seals-854281

## Nutzungsbedingungen

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. Mehr erfahren

## **Conditions d'utilisation**


L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. En savoir plus

## Terms of use

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. Find out more

**Download PDF:** 10.12.2025


ETH-Bibliothek Zürich, E-Periodica, https://www.e-periodica.ch

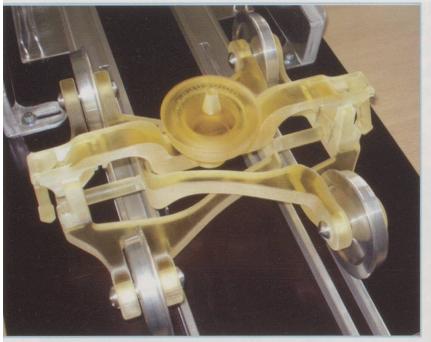







The current proposal revolves around the use of an innovative design of bogie that would allow the gauge to be changed en-route. The layout of the bogie is difficult to explain. A primary component is a main transverse element that supports the coach body through an air suspension unit. On the outside of this cross beam are outriggers that interact with lifting rails at the gauge change point. Underneath the cross beam the pairs of wheels on either side of the

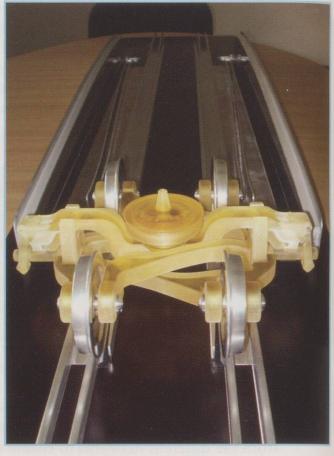

bogie are connected by trapezoidal frames that in their turn are locked together when the bogie is moving. The wheels themselves are on stub axles at either end of the frames.

During the change of gauge process as the coach moves forward the body is supported and lifted by some 200mm as the outriggers meet the outer-lying lifting rails. This allows the wheel frames to uncouple and the two halves of the bogie to move away from (or towards) each other around a central pivot. When this action is completed the body is then lowered. The raising and lowering process also allows the distance between the rail and the body to be adjusted to match the different platform heights on either the metre or standard gauge lines. It is anticipated that with such a bogie-based adjustment system the bodies of existing MOB metre gauge coaches could be used following necessary modifications. As the provision of cog wheel brakes (required on the rack section of the Zentralbahn) is not planned at this stage, and would be difficult to introduce, it means that direct trains could only run between Montreux and Interlaken Ost, with the change of gauge

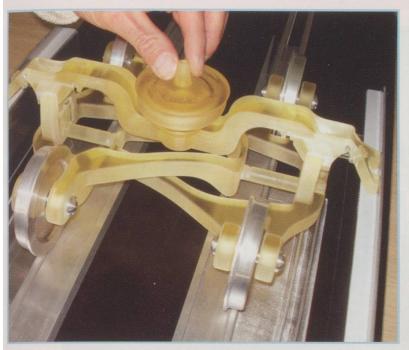

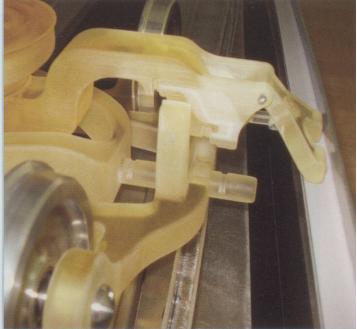

taking place at Zweisimmen.

If trials planned for 2010 are successful the following year could see adjustments to the infrastructure at Zweisimmen, modifications to the existing rolling stock being carried out, and 35 of the new bogies (and possibly additional coaches) ordered. The total cost is estimated at some CHF44m which will be substantially funded by the Cantons of Vaud, Fribourg and Berne. The plan would then be that with effect from the timetable change in December 2012 three train sets would run between Montreux and Interlaken Ost followed in 2014 by five train sets operating a 2-hour regular timetable. Between Zweisimmen and Interlaken East it is proposed that modified BLS RBDe 560 railcars (or similar) would be utilised to haul the gauge-change coaches.

Will this innovative proposal be successful? In engineering terms there is no doubt that the bogies could be made to work but the timescale of the development period seems to be overly optimistic and it is unclear if all the potential costs and maintenance issues have been fully thought through. As the bogies will only be suitable for use under loco-hauled stock there will have to be a time-consuming engine change at Zweisimmen, hence the conventional economic wisdom of using multiple unit



trains will not be applicable. The bottomline is that with a change of train still needed at Interlaken Ost will the expenditure be worth the effort? Only time will tell.

The editor has based this article on MOB Press Releases courtesy Hans-Jürg Spirgi, information on their website and in the technical press, and on German-English translations kindly provided by SRS Member William Venton.